



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



N 50 Ω

Adaptor
Jack – Jack

53K102-K00N5

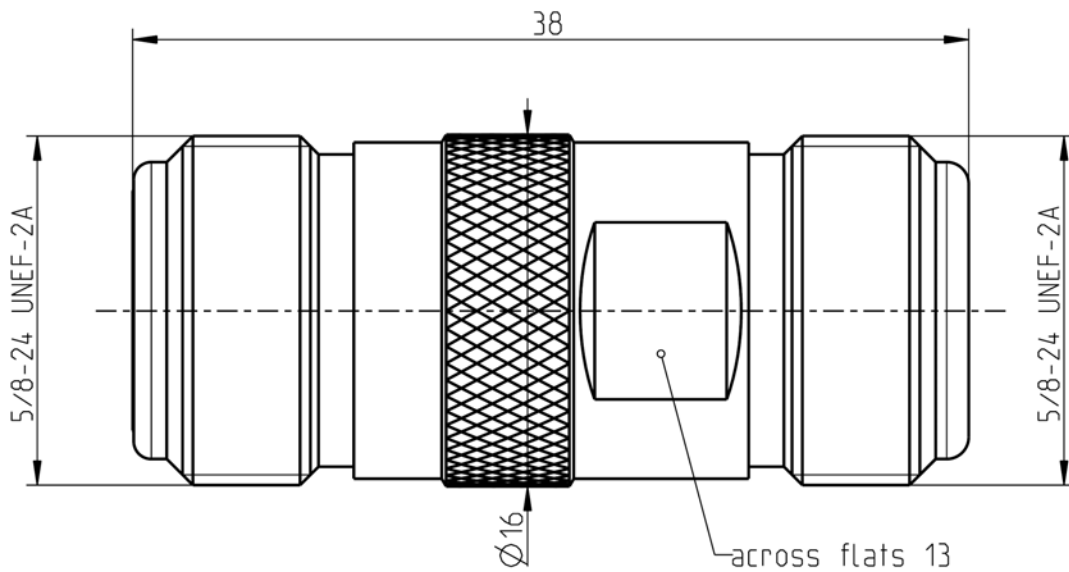

All dimensions are in mm; tolerances according to ISO 2768 m-H

Interface

According to

IEC 61169-16, MIL-PRF-39012, CECC 22210

Material and plating

Connector parts

Center contact
Outer contact
Dielectric

Material

Spring bronze
Brass
PTFE

Plating

AuroDur®, gold plated
Flash white bronze over silver(e.g. Optargen®)

Dieses Dokument ist urheberrechtlich geschützt • This document is protected by copyright • Rosenberger Hochfrequenztechnik GmbH & Co. KG

RF_35/05.10/6.0

N 50 Ω

Adaptor
Jack – Jack

53K102-K00N5

Electrical data

| | |
|--|---|
| Impedance | 50 Ω |
| Frequency | DC to 11 GHz |
| Return loss | ≥ 32 dB @ DC to 2 GHz ≥ 25 dB @ 2 GHz to 4 GHz ≥ 22 dB @ 4 GHz to 9 GHz |
| Insertion loss | ≤ 0.1 x √f [GHz] dB |
| Insulation resistance | ≥ 5 GΩ |
| Center contact resistance | ≤ 1 mΩ |
| Outer contact resistance | ≤ 0.25 mΩ |
| Working voltage (at sea level) | 500 V rms |
| Power handling (at 20 °C, sea level, VSWR 1.0) | 1000 W @ 1 GHz 700 W @ 2 GHz |
| RF-leakage | ≥ 128 dB @ DC to 1 GHz |
| Intermodulation 3 rd order | ≥ 158 dBc (2 x 43 dBm) |

Mechanical data

| | |
|-----------------------------------|------------------|
| Mating cycles | ≥ 500 |
| Center contact captivation: axial | ≥ 28 N |
| Coupling test torque | ≤ 1.7 Nm |
| Recommended torque | 0.7 Nm to 1.1 Nm |

Environmental data

| | |
|-----------------------------------|--------------------------------------|
| Temperature range | -45 °C to +85 °C |
| Thermal shock | MIL-STD-202, Method 107, Condition B |
| Corrosion resistance | MIL-STD-202, Method 101, Condition B |
| Vibration | MIL-STD-202, Method 204, Condition B |
| Shock | MIL-STD-202, Method 213, Condition I |
| Moisture resistance | MIL-STD-202, Method 106 |
| Degree of protection (mated pair) | IEC 60529, IP67 |
| RoHS | compliant |

Weight

| | |
|--------|------------|
| Weight | 42.7 g/pce |
|--------|------------|

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

| | | | | | | | |
|-----------|----------|-------------|----------|------|---------------------------|-------------|----------|
| Draft | Date | Approved | Date | Rev. | Engineering change number | Name | Date |
| M. Wimmer | 22/01/13 | J_Gramsamer | 15.04.15 | c00 | 15-0397 | J_Krautenb. | 15.04.15 |

| | | | | | | | |
|--|--|--|--|--|--|---------------|--|
| Rosenberger Hochfrequenztechnik GmbH & Co. KG P.O.Box 1260 D-84526 Tittmoning Germany www.rosenberger.de | | | | Tel. : +49 8684 18-0 Email : info@rosenberger.de | | Page 2 / 2 | |
|--|--|--|--|--|--|---------------|--|