

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China








TECHNICAL DATA SHEET

Rosenberger

ADAPTOR N 50 Ω JACK - JACK

53K401-K00N5

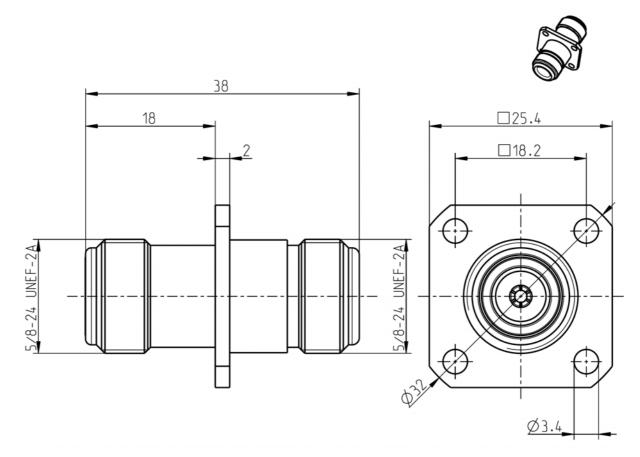

All dimensions are in mm; tolerances according to ISO 2768 m-H

Interface

According to

IEC 61169-16, MIL-PRF-39012, CECC 22210

Documents

B 12

Material and plating

Connector parts

Center contact Outer contact Body Dielectric

Material

Spring bronze Brass Brass PTFE

Plating

AuroDur®, gold plated Flash white bronze over silver(e.g. Optargen®) Flash white bronze over silver(e.g. Optargen®)

Rosenberger Hochfrequenztechnik GmbH & Co. KG P.O.Box 1260 D-84526 Tittmoning Germany www.rosenberger.de

Tel.: +49 8684 18-0

Page

email: info@rosenberger.de

TECHNICAL DATA SHEET

Rosenberger

ADAPTOR N 50 Ω JACK - JACK

53K401-K00N5

Electrical data

Impedance 50Ω

DC to 11 GHz Frequency

Return loss \geq 32 dB, DC to 2 GHz

 \geq 25 dB, 2 to 4 GHz

≥ 22 dB, 4 to 9 GHz

Insertion loss \leq 0.05 dB, DC to 9 GHz

Insulation resistance $\geq 5 \times 10^3 M\Omega$ Center contact resistance \leq 1 m Ω Outer contact resistance $\leq 0.25~\text{m}\Omega$ Working voltage 500 V rms

Power handling (at 20 °C, sea level, VSWR 1.0) 1000 W @ 1 GHz

700 W @ 2 GHz

RF-leakage \geq 128 dB up to 1 GHz

Intermodulation (3rd order) \leq -115 dBm @ 2 x 20 W

Mechanical data

Mating cycles min. 500 Center contact captivation: axial ≥ 28 N Coupling test torque max. 1.7 Nm

Recommended torque 0.7 Nm to 1.1 Nm

Environmental data

Suitable cables

Temperature range -45°C to +85°C

Thermal shock MIL-STD-202, Meth. 107, Cond. B Corrosion MIL-STD-202, Meth. 101, Cond. B Vibration MIL-STD-202, Meth. 204, Cond. B MIL-STD-202, Meth. 213, Cond. I Shock

MIL-STD-202, Meth. 106 Moisture resistance

IEC 60529, IP67 Degree of protection (mated pair)

RoHS compliant

Tooling

N/A

N/A

Weight

Weight 46.6 g/pce

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

Draft	Date	Approved	Date		Rev.	Engineering change number	Name	Date
Inge Mühlauer	22/06/04	J_Gramsamer	15.04.15		h00	15-0397	J_Krautenb.	15.04.15
Bosenberger Hochfreguenztechnik GmbH & Co. KG. Tel : ±49.8684, 18-0								Page

P.O.Box 1260 D-84526 Tittmoning Germany www.rosenberger.de

rage 2/2

email: info@rosenberger.de