

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



# Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China









## 57-21/B7C-AS1T2M/BF

#### **Features**

- Fluorescence Type
- High Luminous Intensity
- High Efficiency
- Pb-free
- The product itself will remain within RoHS compliant version.



#### **Descriptions**

• The 57-21series is available in soft orange, green, blue and yellow. Due to the package design, the LED has wide viewing angle and optimized light coupling by inter reflector. This feature makes ideal for light pipe application. The low current requirement makes this device ideal for portable equipment or any other application where power is at a premium.

#### **Applications**

- OA equipment
- Backlighting of full color LCD
- Automotive equipment
- Replacement of conventional light bulbs and Fluorescent Lamps

#### **Device Selection Guide**

Chip	Endad Calan	Resin Color	
Material	Emitted Color	Resin Color	
InGaN	Blue	Water Clear	


Everlight Electronics Co., Ltd. <a href="http://www.everlight.com">http://www.everlight.com</a> Rev. 1 Page: 1 of 10 Prepared by: Hank Sheng

# **Technical Data Sheet**

## **Side View LED**

# 57-21/B7C-AS1T2M/BF

### **Package Outline Dimensions**

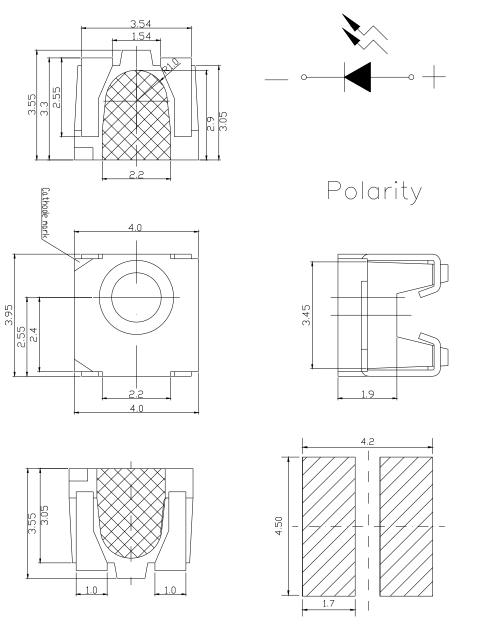

Recommended soldering pad design

**Note:** Tolerances unless mentioned are  $\pm 0.1$ mm, unit = mm.

Everlight Electronics Co., Ltd. <a href="http://www.everlight.com">http://www.everlight.com</a> Rev. 1 Page: 2 of 10 Device No.: DSE-0000596 Prepared date: 22-Dec.-2008 Prepared by: Hank Sheng



## 57-21/B7C-AS1T2M/BF

### **Absolute Maximum Ratings (Ta=25°C)**

Parameter	Symbol	Rating	Unit
Reverse Voltage	$V_R$	5	V
Forward Current	$I_{\mathrm{F}}$	30	mA
Peak Forward Current (Duty 1/10 @1KHz)	$I_{FP}$	100	mA
Power Dissipation	Pd	110	mW
Electrostatic Discharge(HBM)	ESD	1000	V
Operating Temperature	Topr	-40 ~ +85	$^{\circ}$ C
Storage Temperature	Tstg	-40 ~ +90	$^{\circ}\!\mathbb{C}$
Soldering Temperature	Tsol	Reflow Soldering: 260°C for 10 sec. Hand Soldering: 350°C for 3 sec.	

## **Electro-Optical Characteristics (Ta=25°C)**

Parameter	Symbol	Min.	Тур.	Max.	Unit	Condition
Luminous Intensity	Iv	180		450	mcd	
Viewing Angle	201/2		120		deg	
Peak Wavelength	λр		468		nm	
Dominant Wavelength	λd	464.5		476.5	nm	$I_F=20\text{mA}$
Spectrum Radiation Bandwidth	Δλ		25		nm	
Forward Voltage	$V_{\mathrm{F}}$	2.75		3.95	V	
Reverse Current	$I_R$			50	μΑ	V <sub>R</sub> =5V

#### Notes:

1. Tolerance of Luminous Intensity: ±11%

2. Tolerance of Dominant Wavelength: ±1nm

3. Tolerance of Forward Voltage: ±0.05V

Everlight Electronics Co., Ltd. <a href="http://www.everlight.com">http://www.everlight.com</a> Rev. 1 Page: 3 of 10 Device No.: DSE-0000596 Prepared date: 22-Dec.-2008 Prepared by: Hank Sheng



## 57-21/B7C-AS1T2M/BF

**Bin Range of Dominant Wavelength** 

Groups	Bin	Min	Max	Unit	Condition	
A	A9	464.5	467.5			
	A10	467.5	470.5		I -20 A	
	A11	470.5	473.5	nm	$I_F=20\text{mA}$	
	A12	473.5	476.5			

**Bin Range of Luminous Intensity** 

Bin Code	Min.	Max.	Unit	Conduction		
S1	180	225				
S2	225	285	1	1 20 4		
T1	285	360	mcd	I <sub>F</sub> =20mA		
T2	360	450				

**Bin Range of Forward Voltage** 

Groups	Bin	Min	Max	Unit	Condition	
	5	2.75	3.05			
M	6	3.05	3.35	14	I -20 A	
	7	3.35	3.65	volt	$I_F=20\text{mA}$	
	8	3.65	3.95			

#### **Notes:**

1. Tolerance of Luminous Intensity:  $\pm 11\%$ 


2. Tolerance of Dominant Wavelength: ±1nm


3. Tolerance of Forward Voltage: ±0.1V


Everlight Electronics Co., Ltd. <a href="http://www.everlight.com">http://www.everlight.com</a> Rev. 1 Page: 4 of 10 Device No.: DSE-0000596 Prepared date: 22-Dec.-2008 Prepared by: Hank Sheng


## 57-21/B7C-AS1T2M/BF


### **Typical Electro-Optical Characteristics Curves**














Everlight Electronics Co., Ltd. <a href="http://www.everlight.com">http://www.everlight.com</a> Rev. 1 Page: 5 of 10 Prepared date: 22-Dec.-2008 Prepared by: Hank Sheng


## 57-21/B7C-AS1T2M/BF

#### **Label Explanation**

CAT: Luminous Intensity Rank HUE: Dom. Wavelength Rank REF: Forward Voltage Rank



#### **Reel Dimensions**

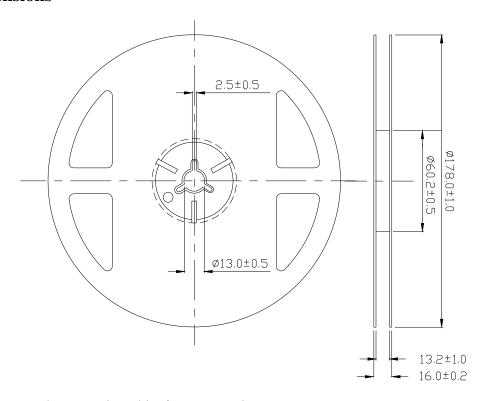

**Note:** Tolerance unless mentioned is  $\pm 0.1$ mm, unit = mm.


Everlight Electronics Co., Ltd. <a href="http://www.everlight.com">http://www.everlight.com</a> Rev. 1 Page: 6 of 10 Device No.: DSE-0000596 Prepared date: 22-Dec.-2008 Prepared by: Hank Sheng

# **Technical Data Sheet**

## **Side View LED**


## **57-21/B7C-AS1T2M/BF**

### Carrier Tape Dimensions: Loaded Quantity 500 pcs. Per Reel

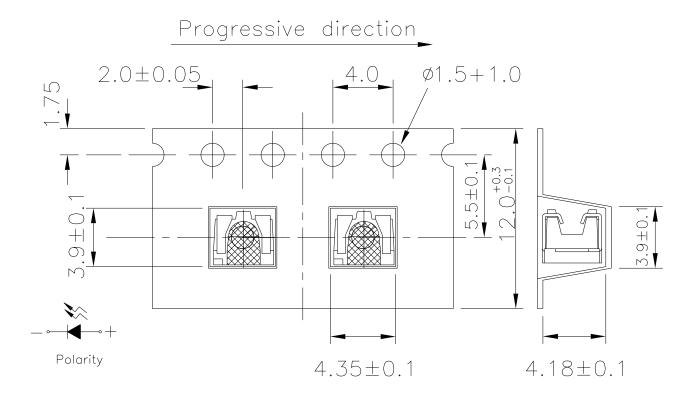

**Note:** Tolerance unless mentioned is  $\pm 0.1$ mm, unit = mm.

### **Moisture Resistant Packaging**

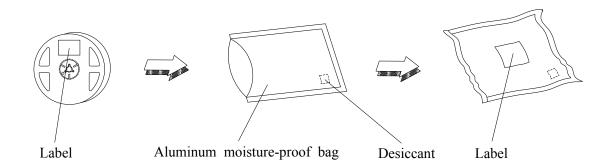

Everlight Electronics Co., Ltd. <a href="http://www.everlight.com">http://www.everlight.com</a> Rev. 1 Page: 7 of 10 Device No.: DSE-0000596 Prepared date: 22-Dec.-2008 Prepared by: Hank Sheng

# 57-21/B7C-AS1T2M/BF

## **Reliability Test Items and Conditions**

The reliability of products shall be satisfied with items listed below.

Confidence level: 90%

LTPD: 10%

No.	Items	Test Condition	Test Hours/Cycles	Sample Size	Ac/Re
1	Reflow Soldering	Temp. : 260°C±5°C Min. 5sec.	6 Min.	22 pcs.	0/1
2	Temperature Cycle	H:+100°C 15min ∫5 min L:-40°C 15min	300 Cycles	22 pcs.	0/1
3	Thermal Shock	H:+100°C 5min ∫ 10 sec L:-10°C 5min	300 Cycles	22 pcs.	0/1
4	High Temperature Storage	Temp. : 100°C	1000 Hrs.	22 pcs.	0/1
5	Low Temperature Storage	Temp. : -40°C	1000 Hrs.	22 pcs.	0/1
6	DC Operating Life	$I_F = 20 \text{ mA}$	1000 Hrs.	22 pcs.	0/1
7	High Temperature / High Humidity	85°C / 85%RH	1000 Hrs.	22 pcs.	0/1

Everlight Electronics Co., Ltd. <a href="http://www.everlight.com">http://www.everlight.com</a> Rev. 1 Page: 8 of 10 Device No.: DSE-0000596 Prepared date: 22-Dec.-2008 Prepared by: Hank Sheng

# **Technical Data Sheet**

### **Side View LED**

## 57-21/B7C-AS1T2M/BF

#### **Precautions for Use**

1. Over-current-proof

Customer must apply resistors for protection; otherwise slight voltage shift will cause big current change (Burn out will happen).


#### 2. Storage

- 2.1 Do not open moisture proof bag before the products are ready to use.
- 2.2 Before opening the package: The LEDs should be kept at 30°C or less and 90%RH or less.
- 2.3 After opening the package: The LED's floor life is 168 hours under 30°C or less and 60% RH or less. If unused LEDs remain, it should be stored in moisture proof packages.
- 2.4 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.

  Baking treatment: 60±5°C for 24 hours.

#### 3. Soldering Condition

3.1 Pb-free solder temperature profile

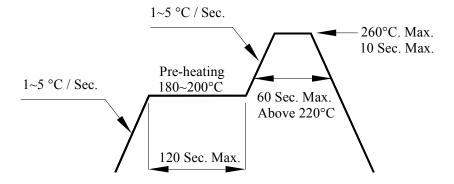

- 3.2 Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.

Everlight Electronics Co., Ltd. <a href="http://www.everlight.com">http://www.everlight.com</a> Rev. 1 Page: 9 of 10 Device No.: DSE-0000596 Prepared date: 22-Dec.-2008 Prepared by: Hank Sheng




## 57-21/B7C-AS1T2M/BF

#### 4. Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 350°C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

#### 5. Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

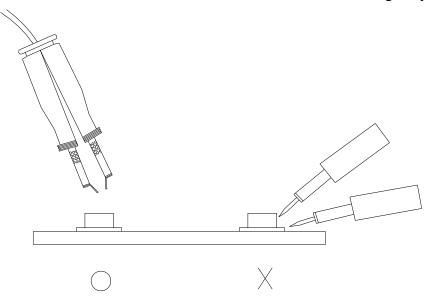

EVERLIGHT ELECTRONICS CO., LTD.

Office: No 25, Lane 76, Sec 3, Chung Yang Rd, Tucheng, Taipei 236, Taiwan, R.O.C Tel: 886-2-2267-2000, 2267-9936

Fax: 886-2267-6244, 2267-6189, 2267-6306

http://www.everlight.com

Everlight Electronics Co., Ltd. <a href="http://www.everlight.com">http://www.everlight.com</a> Rev. 1 Page: 10 of 10 Device No.: DSE-0000596 Prepared date: 22-Dec.-2008 Prepared by: Hank Sheng