imall

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832 Email & Skype: info@chipsmall.com Web: www.chipsmall.com Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



59040 Press-Fit Firecracker Reed Sensor + 57040 Actuator


Sensor Actuator

Dimensions

Dimensions in mm (inch)

Sensor 8.46±0.25 (.333+.01)10.70 ±0.25 31.00±0.25 300 (.42 ±.01) (1.22±.01)





Notes:

1. The 59040 Sensor and 57040 Actuator are designed to fit into a drill size hole of 9.5mm (0.374") diameter.

8.46±0.25 (.333±.01) Ť

Not recommended to be mounted within ferrous metal materials, these activate distance will decrease significantly.

Description

The 59040 Press-Fit Firecracker Reed Sensor is a small, cylindrical reed sensor 31.0mm (L) x 10.7mm (Dia.) (1.22" x 0.420") with a choice of normally open. normally closed or change-over contacts. It is capable of switching up to 300Vdc at 10W and available with a range of sensitivity, cable length and connector options. It is well suited for position and limit sensing, security, level sensing and linear actuator applications. It functions best with the 57040 actuator.

Note: The 57040 Actuator is sold separately.

Features

- · Magnetically-operated proximity sensor
- Cylindrical capsule with retaining ribs
- Operates through non-ferrous materials such as wood, plastic or aluminum

Benefits

- Ribs on capsule compress when inserted into a mounting hole and provide retaining force, allowing simple and secure press-fit installation
- Quick and easy press-fit installation that requires no screws, brackets, nor glue.
- · Well suited for usage in highmoisture and contaminated environments

- Hermetically sealed contacts • Options of normally open, normally
- closed or single-pole-double-throw Customer-defined sensitivity

RoHS

- Custom cable length and connector options available
- Non-contact solution, aesthetically more appealing than push-button or lever mechanical-type switches
- Ideal for battery-powered applications as the contacts do not draw power when in the nonactivated state
- Reed contacts last for millions of operating cycles under microcontroller voltage and current logiclevel loads

Applications

- · Position and limit sensing
- Security

- Level sensing
- Linear actuators

59040 Press-Fit Firecracker Reed Sensor + 57040 Actuator

Electrical Ratings

| Contact Type | | | Normally Open | Change Over | Normally Closed |
|-------------------------|--|--|-------------------------|------------------------|------------------------|
| Switch Type | | | 1 | 3 | 4 |
| Contact Rating 1 | | VA/Watt - max. | 10 | 5 | 5 |
| Voltage ⁴ | Switching ² Breakdown ³ | Vdc - max. Vac - max. Vdc - min. | 200 140 250 | 175 120 200 | 175 120 200 |
| Current ⁴ | Switching ² Carry | Adc - max. Aac - max. Adc - max. | 0.5 0.35 1.2 | 0.25 1.0 1.5 | 0.25 1.0 1.5 |
| Resistance ⁵ | Contact, Initial Insulation | Ω - max. Ω - min. | 0.2 10 ¹⁰ | 0.2 10 ⁹ | 0.2 10 ⁹ |
| Capacitance | Contact | pF - typ. | 0.3 | 0.3 | 0.3 |
| Temperature | Operating | °C | -40 to +105 | -40 to +105 | -40 to +105 |
| | | | | | |

Product Characteristics

| Operate Time ⁶ | | ms - max. | 1.0 | 3.0 | 3.0 |
|---------------------------|-------------|-----------|-----|-----|-----|
| Release Time 6 | | ms - max. | 1.0 | 3.0 | 3.0 |
| Shock 7 | 11ms ½ sine | G - max. | 100 | 50 | 50 |
| Vibration ⁷ | 50-2000 Hz | G - max. | 30 | 30 | 30 |

Notes

1. Contact rating - Product of the switching voltage and current should never exceed the wattage rating. Contact Littelfuse for additional load/life information.

2. When switching inductive and/or capacitive loads, the effects of transient voltages and/or currents should be considered. Refer to Application Notes AN108A and AN107 for details.

3. Breakdown Voltage - per MIL-STD-202, Method 301. Leakage current is less than 0.1mA for 60 seconds.

4. Electrical Load Life Expectancy - Contact Littelfuse with voltage, current values along with type of load.

5. This resistance value is for 11.81mm wire length. Resistance changes when wire lengthens. 6. Operate (including bounce)/Release Time - per EIA/NARM RS-421-A, diode suppressed coil (Coil II).

7. Shock and Vibration - per EIA/NARM RS-421-A and MIL-STD-202.

8. For custom modifications to the wire length or size, or adding a special connector, please contact Littelfuse. 9. Custom sensitivity options and a normally open high-voltage switch option are available

Sensitivity Options (Using 57040 Actuator)


| Select Option | | Select Option | S | | т | | U | |
|---------------|---|-----------------|------------------|---|------------------|---|------------------|---|
| | | Switch Type | Pull-In AT Range | Activate Distance mm (inch) Average | Pull-In AT Range | Activate Distance mm (inch) Average | Pull-In AT Range | Activate Distance mm (inch) Average |
| | 1 | Normally Open | 12-18 | 25.0 (.984) | 17-23 | 21.2 (.834) | 22-28 | 17.9 (.705) |
| | 3 | Change Over | 15-20 | 21.0 (.836) | 20-25 | 18.4 (.725) | 25-30 | 17.0 (.670) |
| | 4 | Normally Closed | 15-20 | 21.0 (.836) | 20-25 | 18.4 (.725) | 25-30 | 17.0 (.670) |


Note:

1. Pull-In AT Range: These AT values are the bare reed switch AT before modification.

2. The activate distance is an average value for the final sensor assembly.

3. Not recommended to be mounted within/near ferrous metal materials; if doing so, these activate distances will decrease significantly



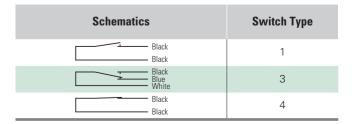



59040 Press-Fit Firecracker Reed Sensor + 57040 Actuator


Cable Length Specification


| Cable Type: 24 AWG PVC 105°C UL1430/UL1569 | | | | |
|--|--------------------------------------|--|--|--|
| Select Option | Select Option Cable Length mm (inch) | | | |
| 02 | 300 (11.81) | | | |

Termination Specification

| Termination Options | | | | | | |
|---------------------|--|--|--|--|--|--|
| Select Option | Description (Two-wire versions illustrated) | | | | | |
| А | Tinned leads (6.4±0.76)mm | | | | | |
| F | Untinned leads (6.4±0.76)mm | | | | | |
| E | JST type XHP 2.5mm pitch | | | | | |

Part Numbering System





Note: The 57040 Actuator is sold separately.

Packaging

| Packaging Option | Packaging Specification | Quantity | Quantity and Packaging Code | Taping Width |
|------------------|-------------------------|----------|-----------------------------|--------------|
| Bulk | Bulk | 500 | N/A | N/A |