



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



DATA SHEET - HOLLOW SHAFT RESOLVER

PN	6-1393048-1			
Description:	V23401		U1016-B110	
Size	21			
Shaft	B1			
Speed - pair of poles - [pp]	1			
Application Spec				
Test protocol	100% EOL testing, stored. Available up on request			
Electrical parameters (at 22°C):				
Input voltage nom. [V _{rms}]	4.0	possible 2V...20V	DC resistance R1R2 [Ω]	65
Frequency nom. [kHz]	5.0	pos. 2kHz...10kHz	R1R2 tolerance [±%]	10
Input current max [mA]	20	Based on nominal Input voltage and Frequency	DC resistance S1S3 or S2S4 [Ω]	81
Transformation ratio rT [±]	0.50		S1S3 or S2S4 tolerance [±%]	10
Transf. ratio tolerance [%]	5			
Phase shift min [°]	-7			
Phase shift max [°]	3			
Angular Error max [']	12			
Residual voltage max [mV]	15			
Connect. Wire Lenght [mm]	300, AWG 26 Teflon Isolated			
High Voltage test	Voltage: 500 V _{AC} ± 3% (A)		Measured between:	
	250 V _{AC} ± 3% (B)		A: Winding R1-R2 and housing	
	Time: 1s		Winding S1-S3 and housing Winding S2-S4 and housing	
Isolation test	Voltage: 500 V _{DC} ± 5% (A, B)		B: Windings S1-S3 and S2-S4	
	Criterium: R _{isol.} > 50M Ohm			
"Zero" setting:	Ele. "0" is when Winding Us2-s4 = 0 and Us1-s3 are in phase with Ur1-r2			
Transformation function	Function applies to the clockwise rotation of the rotor when looking at the (grooveless) transformer component from the top			
	$U_{S1-S3} = + rT * U_{R1-R2} * \cos(pp * \varphi)$			
	$U_{S2-S4} = + rT * U_{R1-R2} * \sin(pp * \varphi)$			
Rotor Inertia	approx. 20 g/cm ²			
Max. Rotational Speed	20.000 rpm			
Shock resistance (11ms sine)	1000 m/s ²			
Vibration (0 ... 2 kHz)	200 m/s ²			
Operating temp.	-55°C...+150°C			

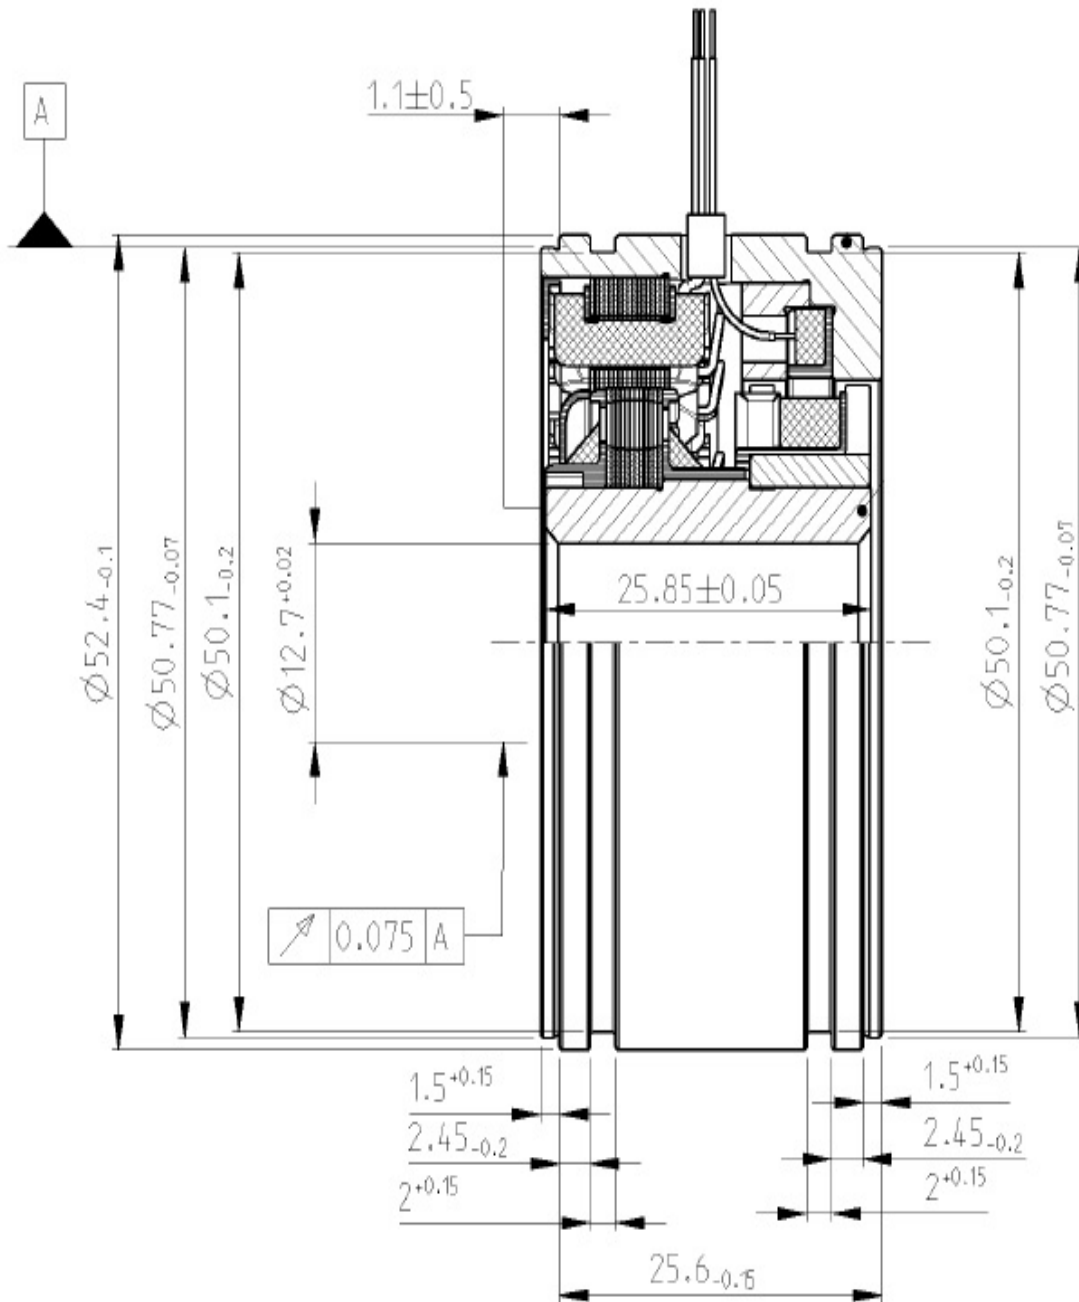

DATE	REV.	DWN	APP	LTR
2015-06-25	A	P. Lerchenfeld	D. Ondrej	1