

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China








Technical Data Sheet

Rosenberger

7-16

Calibration Kit Jack

60K34R-MSON3

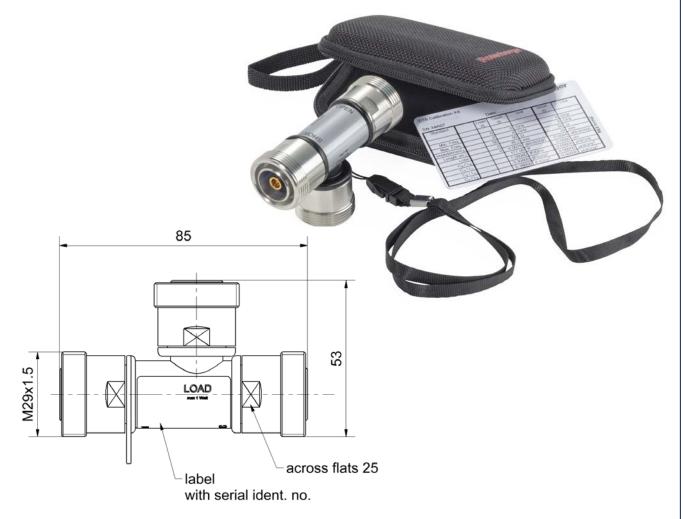

All dimensions are in mm; tolerances according to ISO 2768 m-H

Interface

According to

IEC 61169-4, EN 122190, DIN 47223

Documents

This kit is delivered with

- Standard Definitions Card
 Printed Standard Definitions that can be used on nearly all Vector Network Analyzers
- Test Results Documentation
- Lanyard
- Hard Shell Case

Material and plating Connector parts Center conductor Outer conductor Body Dielectric	Material CuBe Brass Brass PP	Plating Gold, min. 1.27 μm, over nickel Flash white bronze over silver(e.g. Optargen®) powder coated
Dielectric Substrate	Al ₂ O ₃	

Rosenberger Hochfrequenztechnik GmbH & Co. KG P.O.Box 1260 D-84526 Tittmoning Germany www.rosenberger.de

Tel. : +49 8684 18-0 Email : info@rosenberger.de Page

1/3

Dieses Dokument ist urheberrechtlich geschützt • This document is protected by copyright • Rosenberger Hochfrequenztechnik GmbH & Co.

35/09.14/6.2

Technical Data Sheet

Rosenberger

7-16

Calibration Kit Jack

60K34R-MSON3

Electrical data

DC to 4 GHz Frequency range

Open

Return loss \leq 0.15 dB, DC to 4 GHz Error from nominal phase¹ \leq 3.0°, DC to 4 GHz

Short

Return loss \leq 0.15 dB, DC to 4 GHz Error from nominal phase² \leq 3.0°, DC to 4 GHz

Load

Return loss \geq 40 dB, DC to 2.5 GHz \geq 38 dB, 2.5 GHz to 4 GHz

DC-Resistance $50 \Omega \pm 0.5 \Omega$ Power handling $\leq 1.0 \text{ W}$

Mechanical data

Mating cycles ≥ 500 Maximum torque 30 Nm Recommended torque 2.26 Nm

1.77 mm to 2.07 mm Gauge

General standard definitions

For proper operation the vector network analyzer (VNA) needs a model describing the electrical behaviour of this calibration standard. The different models, units, and terms used will depend on the VNA type and they will have to be entered into the VNA. All values are based on typical geometry and plating.

Open

Loss

Offset Zo / Impedance / Zo 50Ω Offset Delay 87.394 ps Length (electrical) / Offset Length 26.20 mm Offset Loss $0.50~G\Omega/s$ $0.0076 \, dB / \sqrt{GHz}$

 $C_0 = 177.000 \times 10^{-15} F$ Fringing Capacitances 177.000 fF

> $C_1 = 7200.00 \times 10^{-27} \text{ F/Hz} /$ 7.20000 fF /GHz $C_2 = -3300.00 \times 10^{-36} \text{ F/Hz}^2$ -3.30000 fF /GHz² $C_3 = 386.000 \times 10^{-45} \text{ F/Hz}^3$ 0.38600 fF /GHz³

www.rosenberger.de

Tel. : +49 8684 18-0 Email: info@rosenberger.de

¹ The nominal phase is defined by the Offset Delay, the Offset Loss and the Fringing Capacitances

² The nominal phase is defined by the Offset Delay, the Offset Loss and the Short Inductance

Technical Data Sheet		Rosenberger		
7-16	Calibration Kit	60K34R-MSON3		

Short

 $\begin{array}{lll} \text{Offset $Z_{\rm o}$ / Impedance / $Z_{\rm o}$} & 50 \ \Omega \\ \text{Offset Delay} & 96.734 \ \text{ps} \\ \text{Length (electrical) / Offset Length} & 29.00 \ \text{mm} \\ \text{Offset Loss} & 0.50 \ \text{G}\Omega/\text{s} \\ \end{array}$

Loss 0.0084 dB/ √GHz

Short Inductance $L_0 = 0.0000 \times 10^{-12} \,\text{H}$ / 0.0000 pH

 $L_1 = 0.0000 \times 10^{-24} \text{ H/Hz}$ / 0.0000 pH/GHz $L_2 = 0.0000 \times 10^{-33} \text{ H/Hz}^2$ / 0.0000 pH/GHz²

 $L_3 = 0.0000 \times 10^{-42} \text{ H/Hz}^3$

/ 0.0000 pH/GHz³

Load

 $\begin{array}{ll} \mbox{Offset $Z_{\rm o}$ / Impedance / $Z_{\rm o}$} & \mbox{50 } \Omega \\ \mbox{Offset Delay} & 0.0000 \ \mbox{ps} \\ \mbox{Length (electrical) / Offset Length} & 0.000 \ \mbox{mm} \\ \mbox{Offset Loss} & 0.000 \ \mbox{G}\Omega/\mbox{s} \\ \mbox{Loss} & 0.0000 \ \mbox{dB}/\sqrt{\mbox{GHz}} \end{array}$

Environmental data

Operating temperature range 3 0 °C to +50 °C Storage temperature range 3 - 55 °C to +90 °C RoHS compliant

Declaration of documentation

Standard delivery for this kit includes Test Results. The documentation issued reports which quantities were tested individually, traceable to national / international standards. Model based standard definitions of the calibration standards are reported in Agilent / Keysight, Rohde & Schwarz and Anritsu compatible VNA format.

Inspection interval

Recommendation 12 months

Packing

Standard 1 pce in bag Weight 310 g/pce

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

Kerstin Herzog 10.07.06 Herbert Babinger 19.10.17 h00 17-s336 M. Knoll 15	Draft	Date	Approved	Date	Rev.	Engineering change number	Name	Date
	Kerstin Herzog	10.07.06	Herbert Babinger	19.10.17	h00	17-s336	M. Knoll	19.10.17

Rosenberger Hochfrequenztechnik GmbH & Co. KG P.O.Box 1260 D-84526 Tittmoning Germany www.rosenberger.de

Tel. : +49 8684 18-0 Email : info@rosenberger.de Page 3 / 3

³ Temperature range over which these specifications are valid.