

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China









67-31B/B7C-AV2X1MZ3/BT

Features

- PLCC-3 package.
- High flux output.
- High current capability.
- White package.
- Optical indicator.
- Colorless clear window.
- Ideal for backlight and light pipe application.
- Inter reflector.
- Wide viewing angle.
- Suitable for automatic placement equipment.
- Suitable for reflow and wave solder processes.
- Available on tape and reel (8mm Tape).
- Pb-free.
- The product itself will remain within RoHS compliant version.

Descriptions

The 67-31B series is available in soft orange,red,Green,Blue and yellow. Due to the package design, the LED has wide viewing angle and optimized light coupling by inter reflector.

This feature makes the ideal for light pipe application. The low current requirement makes this device ideal for portable equipment or any other application where power is at a premium.

Applications

- Indicator and backlight for audio and video equipment.
- Indicator and backlight in office and family equipment.
- Flat backlight for LCD's, switches and symbols.
- Light pipe application.
- General use.

Device Selection Guide

Chip	Emitted Color	Resin Color		
Material	Emitted Color	Resili Coloi		
InGaN	Blue	Water Clear		

Everlight Electronics Co., Ltd.

Device No. :DSE-0001077

http://www.everlight.com

Rev.1


Page: 1 of 10

Prepared date:31-Dec.-2008



67-31B/B7C-AV2X1MZ3/BT

Package Dimensions

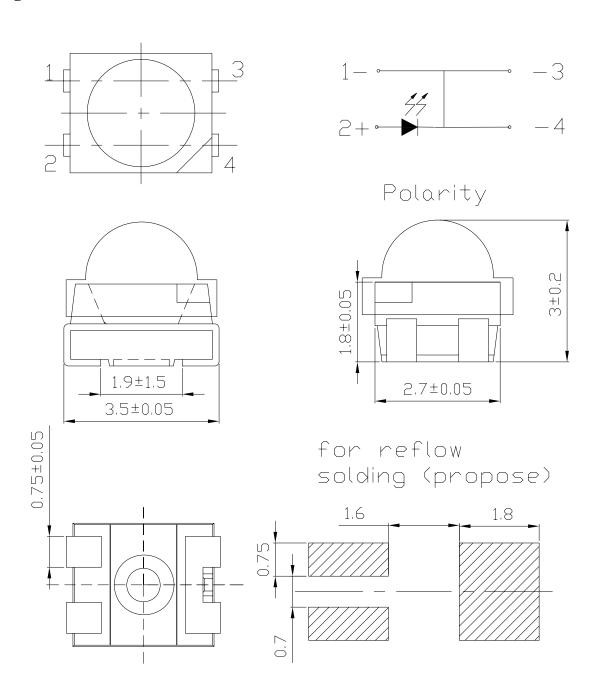

Note: The tolerances unless mentioned is ± 0.1 mm; Unit = mm

Everlight Electronics Co., Ltd. Device No.: DSE-0001077

http://www.everlight.com Prepared date:31-Dec.-2008

Prepared by: Giles

Rev.1

Page: 2 of 10



67-31B/B7C-AV2X1MZ3/BT

Absolute Maximum Ratings ($T_A=25^{\circ}C$)

Parameter	Symbol	Rating	Unit
Reverse Voltage	V_R	5	V
Forward Current	I_{F}	30	mA
Peak Forward Current(Duty 1/10 @1KHz)	I_{FP}	100	mA
Power Dissipation	Pd	110	mW
Electrostatic Discharge(HBM)	ESD	2000	V
Operating Temperature	T_{opr}	-40 ~ +85	$^{\circ}$
Storage Temperature	T _{stg}	-40 ~ +90	$^{\circ}\!\mathbb{C}$
Soldering Temperature	Tsol	Reflow Soldering : 260 °C for Hand Soldering : 350 °C for	

Electronic Optical Characteristics:

Parameter	Symbol	Min.	Тур.	Max.	Unit	Condition
Luminous Intensity	I_{v}	900		2250	mcd	I _F =30mA
Viewing Angle	2 θ 1/2		60		deg	I _F =30mA
Peak Wavelength	λp		468		nm	I _F =30mA
Dominant Wavelength	λd	464.5		476.5	nm	I _F =30mA
Spectrum Radiation Bandwidth	Δλ		25		nm	I _F =30mA
Forward Voltage	VF	2.75		3.95	V	I _F =30mA
Reverse Current	I_R			50	μ A	V _R =5V

Notes:

1.Tolerance of Luminous Intensity: ±11% 2.Tolerance of Dominant Wavelength: ±1nm 3.Tolerance of Forward Voltage: ±0.1V

Everlight Electronics Co., Ltd.

Device No.: DSE-0001077

http://www.everlight.com Prepared date:31-Dec.-2008

Prepared by: Giles

Rev.1

Page: 3 of 10



67-31B/B7C-AV2X1MZ3/BT

Bin Range of Luminous Intensity

Bin	Min.	Max.	Unit	Condition
V2	900	1120	med	I _F =30mA
W1	1120	1420		
W2	1420	1800		
X1	1800	2250		

Bin Range of Dominant Wavelengths

Group	Bin	Min.	Max.	Unit	Condition	
A	A9	464.5	467.5			
	A10	467.5	470.5	nm	I _F =30mA	
	A11	470.5	473.5			
	A12	473.5	476.5			

Bin Range of Forward Voltage

Group	Bin	Min.	Max.	Unit	Condition	
М	5	2.75	3.05			
	6	3.05	3.35	V	I -20m A	
	7	3.35	3.65		I _F =30mA	
	8	3.65	3.95			

Notes:

1. Tolerance of Luminous Intensity : $\pm 11\%$

2. Tolerance of Dominant Wavelength : ± 1 nm

3. Tolerance of Forward Voltage: $\pm 0.1 V$

Everlight Electronics Co., Ltd. http://www.everlight.com Rev.1 Page: 4 of 10

Device No.:DSE-0001077 Prepared date:31-Dec.-2008 Prepared by: Giles





EVERLIGHT EVERLIGHT ELECTRONICS CO., LTD.


Technical Data Sheet **Power Top View LEDs with Lens**


67-31B/B7C-AV2X1MZ3/BT


Typical Electro-Optical Characteristic Curves

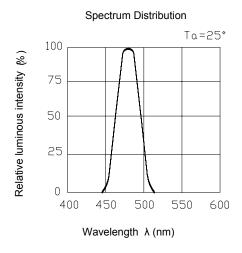


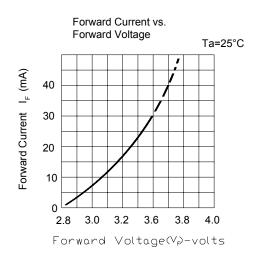









Page: 5 of 10

Everlight Electronics Co., Ltd. http://www.everlight.com Rev.1 Device No. :DSE-0001077 Prepared date:31-Dec.-2008


67-31B/B7C-AV2X1MZ3/BT

Label Explanation

CAT: Luminous Intensity Rank HUE: Dom. Wavelength Rank REF: Forward Voltage Rank



Reel Dimensions

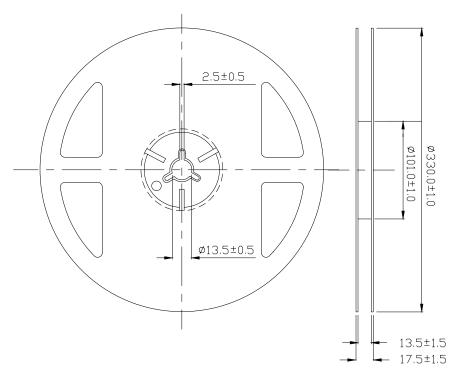

Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm

Everlight Electronics Co., Ltd. Device No.: DSE-0001077

http://www.everlight.com Prepared date:31-Dec.-2008

Prepared by: Giles


Rev.1

Page: 6 of 10




67-31B/B7C-AV2X1MZ3/BT

Carrier Tape Dimensions: Loaded Quantity 500 pcs Per Reel.

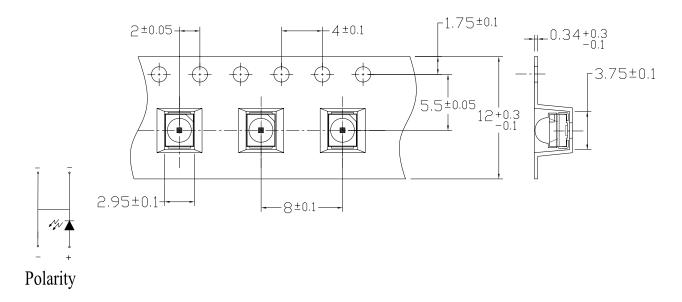

Note: Tolerances unless mentioned ± 0.1 mm, Unit = mm

Moisture Resistant Packaging

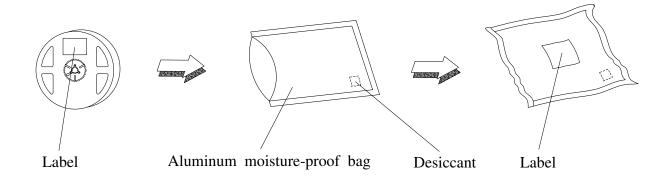

Everlight Electronics Co., Ltd. Device No.: DSE-0001077

http://www.everlight.com Prepared date:31-Dec.-2008 Rev.1 Page: 7 of 10

67-31B/B7C-AV2X1MZ3/BT

Reliability Test Items and Conditions

The reliability of products shall be satisfied with items listed below.

Confidence level: 90%

LTPD: 10%

No.	Items	Test Condition	Test Hours/Cycles	Sample Size	Ac/Re
1	Reflow Soldering	Temp. : 260°C±5°C Min. 5 sec.	6 Min.	22 PCS	0/1
2	Temperature Cycle	$H: +100^{\circ}\mathbb{C}$ 15min $\int 5 \text{ min}$ $L: -40^{\circ}\mathbb{C}$ 15min	300 Cycles	22 PCS.	0/1
3	Thermal Shock	$H: +100^{\circ}\mathbb{C}$ 5min $\int 10 \sec$ $L: -10^{\circ}\mathbb{C}$ 5min	300 Cycles	22 PCS.	0/1
4	High Temperature Storage	Temp. : 100°C	1000 Hrs.	22 PCS.	0/1
5	Low Temperature Storage	Temp. : -40°℃	1000 Hrs.	22 PCS.	0/1
6	DC Operating Life	If = $30 \text{ mA} / 25^{\circ}\text{C}$	1000 Hrs.	22 PCS.	0/1
7	High Temperature / High Humidity	85℃/85%RH	1000 Hrs.	22 PCS.	0/1

Everlight Electronics Co., Ltd.

Device No.: DSE-0001077

http://www.everlight.com

Prepared date:31-Dec.-2008

Rev.1

Page: 8 of 10

67-31B/B7C-AV2X1MZ3/BT

Precautions for Use

1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change (Burn out will happen).


2. Storage

- 2.1 Do not open moisture proof bag before the products are ready to use.
- 2.2 Before opening the package: The LEDs should be kept at 30°C or less and 90%RH or less.
- 2.3 After opening the package: The LED's floor life is 1 year under 30°C or less and 60% RH or less. If unused LEDs remain, it should be stored in moisture proof packages.
- 2.4 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.

 Baking treatment: 60±5°C for 24 hours.

3. Soldering Condition

3.1 Pb-free solder temperature profile

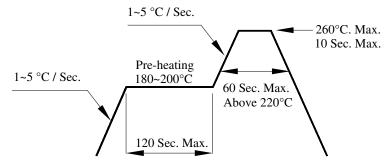

- 3.2 Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.

4. Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 350°C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

Everlight Electronics Co., Ltd. http://www.everlight.com Rev.1 Page: 9 of 10


Device No.:DSE-0001077 Prepared date:31-Dec.-2008 Prepared by: Giles



67-31B/B7C-AV2X1MZ3/BT

5. Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

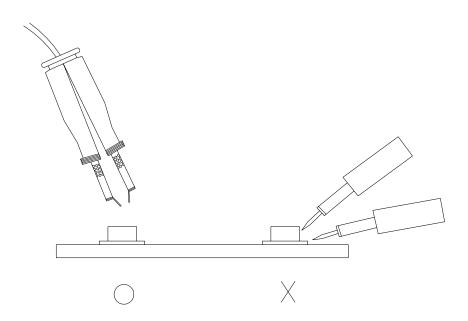

EVERLIGHT ELECTRONICS CO., LTD.

Office: No 25, Lane 76, Sec 3, Chung Yang Rd, Tucheng, Taipei 236, Taiwan, R.O.C Tel: 886-2-2267-2000, 2267-9936

Fax: 886-2267-6244, 2267-6189, 2267-6306

http://www.everlight.com

Everlight Electronics Co., Ltd. http://www.everlight.com Rev.1 Page: 10 of 10

Device No.:DSE-0001077 Prepared date:31-Dec.-2008 Prepared by: Giles