

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China







Technica	al Data Sheet	Rosenberger				
BNC 75 Ω	ADAPTOR JACK – JACK WITH INSULATED ROUND FLANGE	71K542-K00A5				

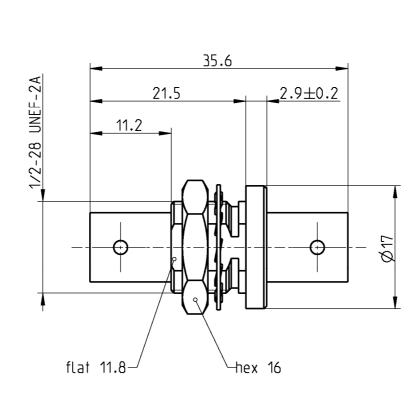



All dimensions are in mm; tolerances according to ISO 2768 m-H

	tace	

Compatible to

IEC 61169-8, MIL-PRF-39012, CECC 22120

Documents

Panel piercing

B 3

Material and plating Connector parts

Center contact Outer contact Body

Dielectric

Insulated round flange

Material

CuNi1Pb1P **Brass Brass**

PTFE POM

Plating

AuroDur®, gold plated Nickel, 2.5-5 µm Nickel, 2.5-5 µm

Rosenberger Hochfrequenztechnik GmbH & Co. KG P.O.Box 1260 D-84526 Tittmoning Germany www.rosenberger.de

: +49 8684 18-0 Fax : +49 8684 18-499

Email: info@rosenberger.de

Page

1/2

Technical Data Sheet Rosenberger

BNC 75 Ω

ADAPTOR JACK – JACK WITH INSULATED ROUND FLANGE

71K542-K00A5

Electrical data

 $\begin{array}{ll} \text{Impedance} & 75~\Omega \\ \text{Frequency} & \text{DC to 4 GHz} \end{array}$

Return loss \geq 36 dB @ DC to 1 GHz \geq 31 dB @ 1 GHz to 2 GHz \geq 29 dB @ 2 GHz to 3 GHz

Insertion loss $\leq 0.05 \text{ x } \sqrt{\text{ f [GHz]}} \text{ dB, DC to 3 GHz}$

 $\begin{array}{lll} \mbox{Insulation resistance} & \geq 5 \ \mbox{G}\Omega \\ \mbox{Center contact resistance} & \leq 20 \ \mbox{m}\Omega \\ \mbox{Outer contact resistance} & \leq 5 \ \mbox{m}\Omega \\ \mbox{Test voltage (at sea level)} & 1500 \ \mbox{V rms} \\ \mbox{Working voltage (at sea level)} & 400 \ \mbox{V rms} \\ \mbox{Power handling (at 20 °C, sea level, VSWR 1.0)} & \leq 80 \ \mbox{W} \ \mbox{@ 2 GHz} \\ \end{array}$

Mechanical data

Environmental data

Temperature range
Thermal shock
Corrosion resistance
Vibration
Shock
MIL-STD-202, Method 107, Condition B
MIL-STD-202, Method 101, Condition B
MIL-STD-202, Method 204, Condition B
MIL-STD-202, Method 213, Condition G
MIL-STD-202, Method 213, Condition G

Moisture resistance MIL-STD-202, Method 106

RoHS compliant

Tooling N/A

Suitable cables
N/A

Weight 13.9 g/pce

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

Draft	Date	Approved	Date		Rev.	Engineering change number	Name	Date
Gasteiger A.	14.03.12	Sa. Krautenbacher	24.03.14		b00	14-0352	T. Krojer	24.03.14
Rosenberger Hochfrequenztechnik GmbH & Co. KG					Tel.	: +49 8684 18-0		Page

Rosenberger Hochfrequenztechnik GmbH & Co. KG P.O.Box 1260 D-84526 Tittmoning Germany www.rosenberger.de

Tel. : +49 8684 18-0 Fax : +49 8684 18-499 Email : info@rosenberger.de

2/2