



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
H	-	P	LTR	DESCRIPTION	DATE	DWN	APVD
		A		INITIAL DRAWING	03FEB2015	GSK	BvH

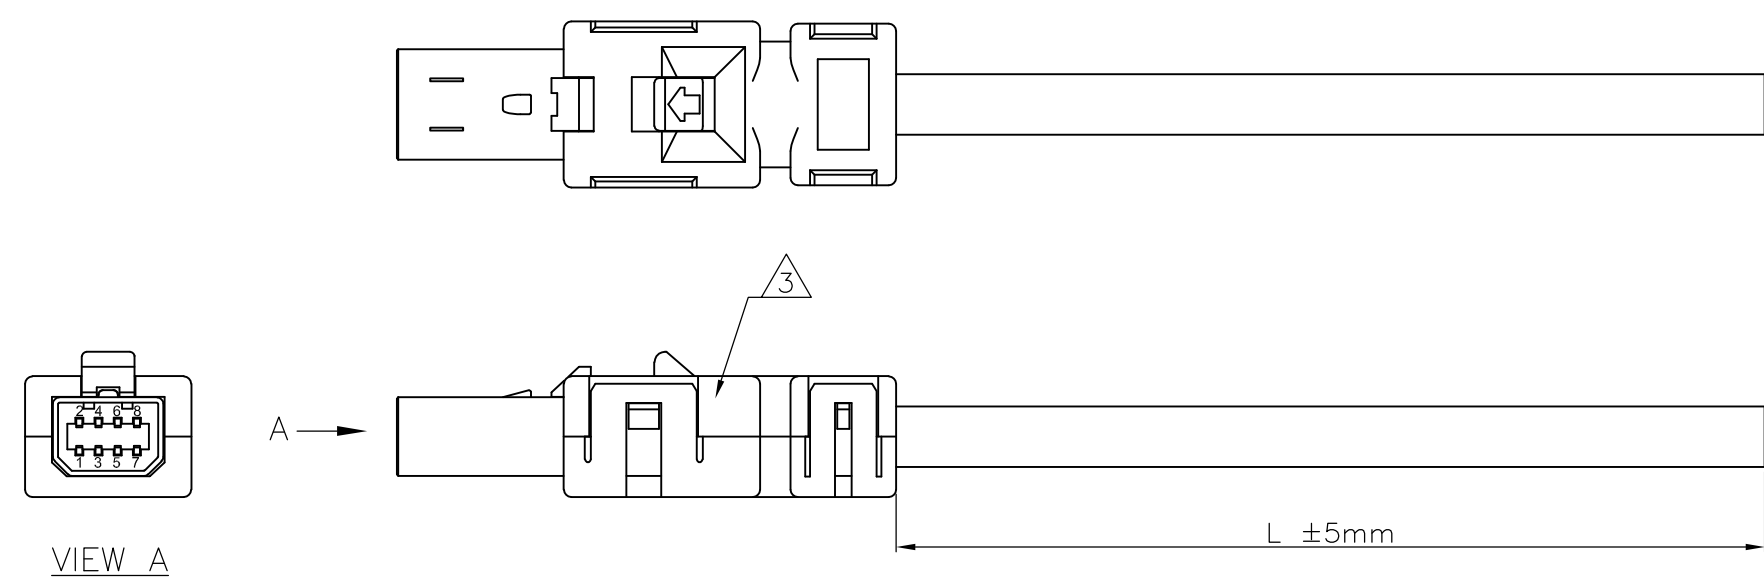

NOTES:

- 1 PACKAGING: ACC. TO TE SPEC. 107-18032
- 2 ELECTRICAL TEST ACCORDING TE SPECIFICATION 108-18857.
SHORT-CIRCUIT AND CONTINUITY TEST AT 500V DC, 0.1s
- 3 WIRING SCHEMA ACC. TO TIA/EIA-568-B AS SHOWN IN WIRING SCHEDULE

WIRING SCHEDULE 3

CAVITY SIDE A	COLOR	CAVITY SIDE B
1	WH/OG	1
2	OG	2
3	WH/GN	3
4	BU	4
5	WH/BU	5
6	GN	6
7	WH/BN	7
8	BN	8

10	HiFlex MultiPurpose 70°C PUR	2-2205130-6
5	HiFlex MultiPurpose 70°C PUR	2-2205130-5
3	HiFlex MultiPurpose 70°C PUR	2-2205130-4
2	HiFlex MultiPurpose 70°C PUR	2-2205130-3
1	HiFlex MultiPurpose 70°C PUR	2-2205130-2
0.5	HiFlex MultiPurpose 70°C PUR	2-2205130-1
10	HI 125°C TPE	1-2205130-6
5	HI 125°C TPE	1-2205130-5
3	HI 125°C TPE	1-2205130-4
2	HI 125°C TPE	1-2205130-3
1	HI 125°C TPE	1-2205130-2
0.5	HI 125°C TPE	1-2205130-1
10	STD 110°C PVC	2205130-6
5	STD 110°C PVC	2205130-5
3	STD 110°C PVC	2205130-4
2	STD 110°C PVC	2205130-3
1	STD 110°C PVC	2205130-2
0.5	STD 110°C PVC	2205130-1
Length/m	Cable version	TE PN

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 03FEB2015 SATHISH KUMAR .G	TE Connectivity	
DIMENSIONS: mm		CHK 03FEB2015 B.VELDHOVEN		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD 03FEB2015 A.VAN ZANDVOORT	NAME CA MINI IO TYPE II PIGTAIL	
0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± 1°		PRODUCT SPEC 108-78955	SIZE A3	
MATERIAL		APPLICATION SPEC 114-5506	CAGE CODE 00779	DRAWING NO C-2205130
FINISH		WEIGHT -	RESTRICTED TO -	
PRODUCT CHARACTERISTIC ACC. OMP EMEA_12 BESONDERE MERKMALE NACH OMP EMEA_12		CUSTOMER DRAWING		SCALE NTS
		SHEET 1 OF 1		REV A