

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China







CombiCard 5000-7000

This modular enclosure system offers adaptability and protection class IP 66

- -3 widths
- The depth can be varied by combining the components
- Easy mounting of the system components
- Hinge and access position freely selectable in the whole system
- Various fronts
- Optional rear element with separate terminal compartment (also on both sides)
- Definable access protection
- Installation of 19" components possible
- Comprehensive range of accessories





Colour Lateral trims, front and base elements light grey, similar to RAL 7035; front lid FD...G, crystal-clear,

rear elements agate grey, similar to RAL 7038; special colours on request

Protection class IP 66/DIN EN 60529; with air vents IP 30/DIN EN 60529

Enclosure material ABS; PC (only FD...G), seal made of CR; for details see Technical Information

All front, base and rear elements can be combined in a basic size. The combination of "front with rear lid" can be created directly, without a basic element. With a suitable enclosure size, the base elements with air vents can be positioned according to the convection requirements. The integrated hinged quick-release fasteners allows left-hand or right-hand opening between every system component. Each hinged quick-release fastener can be protected against unauthorized access by lock bolts or lead seals. The optimal way to close the fronts is by using a cylinder catch.

19" subracks acc. to DIN EN 60297-3-101 can be fitted in suitable enclosure configurations. The necessary 19" accessories are in the Interzoll Modul / Interzoll chapter.





CombiCard 5000-7000 fronts



Front lid for accommodating membrane keypads

| Model | Order no. | Α | В | C | a1 | a2 |
|---------|-----------|-------|-------|----|-------|-------|
| FD 5000 | 79002800 | 175,7 | 146,7 | 34 | 128,6 | 131,8 |
| FD 6000 | 79002900 | 226,5 | 146,7 | 34 | 179,4 | 182,6 |
| FD 7000 | 79003000 | 323 | 146,7 | 34 | 275,9 | 279,1 |


Scope of delivery: Front lid with seal, 2 mounted locks, 1 blind plug (to close the lock opening on the opening side), 1 catch (to close the lock opening and one-time definition of the hinge side on the front lid)



Front lid, crystal-clear

| Model | Order no. | Α | В | C | a1 | a2 |
|-----------|-----------|-------|-------|----|-------|-------|
| FD 5000 G | 79003100 | 175,7 | 146,7 | 34 | 128,6 | 131,8 |
| FD 6000 G | 79003200 | 226,5 | 146,7 | 34 | 179,4 | 182,6 |
| FD 7000 G | 79003300 | 323 | 146,7 | 34 | 275,9 | 279,1 |

Scope of delivery: Front lid with seal, 2 mounted locks, 1 blind plug (to close the lock opening on the opening side), 1 catch (to close the lock opening and one-time definition of the hinge side on the front lid)

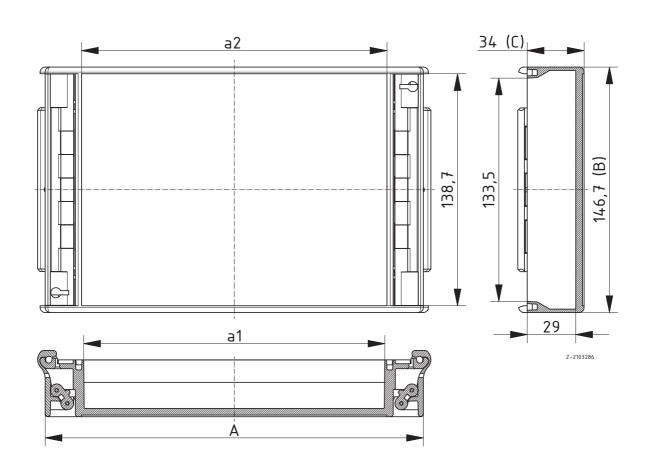



CombiCard 5000-7000 fronts


Closed front frame for accommodating membrane keypads, screw-on

| Model | Order no. | Α | В | C | a1 | a2 |
|---------|-----------|-------|-------|----|-------|-------|
| FR 5000 | 79003700 | 175,7 | 146,7 | 34 | 128,6 | 113,6 |
| FR 6000 | 79003800 | 226,5 | 146,7 | 34 | 179,4 | 164,4 |
| FR 7000 | 79003900 | 323 | 146,7 | 34 | 275,9 | 260,9 |
| | | | | | | |

Scope of delivery: Front frame with seal, 2 snap-on covers, 4 fixing screws

Note: If required, retrofitting of a hinged quick-release fastener is possible using accessory SV 5670.



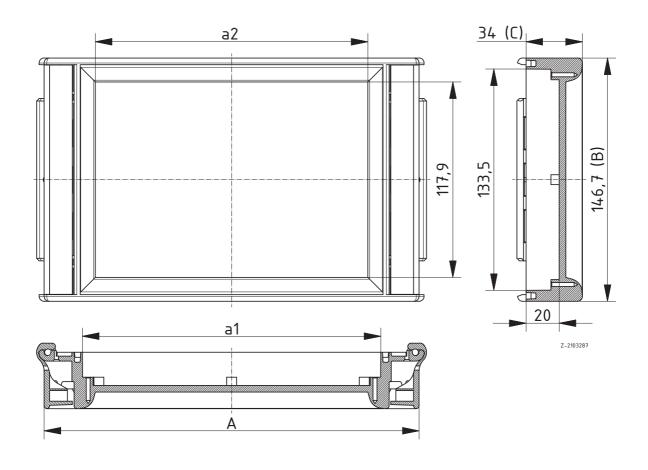



CombiCard 5000-7000 fronts




Open front frame with integrated seal, screw-on

| Model | Order no. | Α | В | C | a1 | a2 |
|---------|-----------|-------|-------|----|-------|-------|
| F0 5000 | 79003400 | 175,7 | 146,7 | 34 | 128,6 | 109,6 |
| F0 6000 | 79003500 | 226,5 | 146,7 | 34 | 179,4 | 160,4 |
| F0 7000 | 79003600 | 323 | 146,7 | 34 | 275,9 | 256,9 |

Scope of delivery: Front frame with seal, 2 snap-on covers, 4 fixing screws, 10 front panel fixing screws

Note: On request, retrofitting with a hinged quick-release fastener is possible with accessory SV 5670. Front panels as accessories

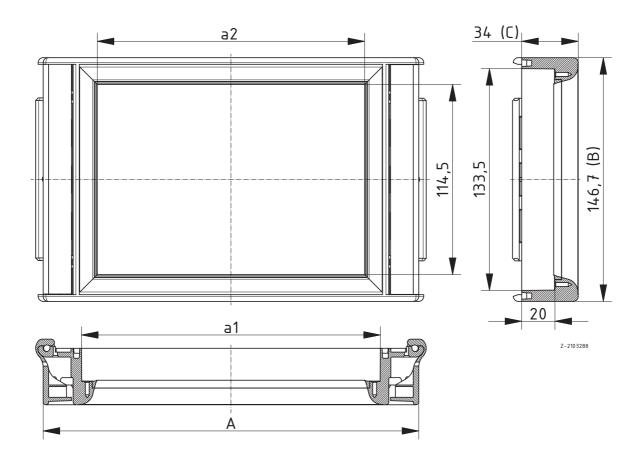



CombiCard 5000-7000 basic elements

Basic element 0.5 (51.51 mm deep)

| Model | Order no. | Α | В | C | a1 |
|--------------|-----------|-------|-------|-------|-------|
| BC 5000 -0,5 | 79001000 | 175,7 | 146,7 | 51,51 | 127,1 |
| BC 6000 -0,5 | 79001100 | 226,5 | 146,7 | 51,51 | 177,9 |
| BC 7000 -0,5 | 79001200 | 323 | 146,7 | 51,51 | 274,4 |

Scope of delivery: Base element with seal, 2 mounted locks



Basic element 1 (88.25 mm deep)

| Model | Order no. | Α | В | C | a1 |
|------------|-----------|-------|-------|-------|-------|
| BC 5000 -1 | 79001600 | 175,7 | 146,7 | 88,25 | 127,1 |
| BC 6000 -1 | 79001700 | 226,5 | 146,7 | 88,25 | 177,9 |
| BC 7000 -1 | 79001800 | 323 | 146,7 | 88,25 | 274,4 |

Scope of delivery: Base element with seal, 2 mounted locks



Basic element 1.5 (139.76 mm deep)

| Model | Order no. | Α | В | C | a1 |
|--------------|-----------|-------|-------|--------|-------|
| BC 5000 -1,5 | 79002200 | 175,7 | 146,7 | 139,76 | 127,1 |
| BC 6000 -1,5 | 79002300 | 226,5 | 146,7 | 139,76 | 177,9 |
| BC 7000 -1,5 | 79002400 | 323 | 146,7 | 139,76 | 274,4 |

Scope of delivery: Base element with seal, 2 mounted locks



Basic element 0.5 (51.51 mm deep) with air vents

| Model | Order no. | A | В | C | a1 |
|---------------|-----------|-------|-------|-------|-------|
| BC 5000 L-0,5 | 79001300 | 175,7 | 146,7 | 51,51 | 127,1 |
| BC 6000 L-0,5 | 79001400 | 226,5 | 146,7 | 51,51 | 177,9 |
| BC 7000 L-0,5 | 79001500 | 323 | 146,7 | 51,51 | 274,4 |

Scope of delivery: Base element with air vents without seal, 2 mounted locks



Basic element 1 (88.25 mm deep) with air vents

| Model | Order no. | A | В | C | a1 |
|-------------|-----------|-------|-------|-------|-------|
| BC 5000 L-1 | 79001900 | 175,7 | 146,7 | 88,25 | 127,1 |
| BC 6000 L-1 | 79002000 | 226,5 | 146,7 | 88,25 | 177,9 |
| BC 7000 L-1 | 79002100 | 323 | 146,7 | 88,25 | 274,4 |

Scope of delivery: Base element with air vents without seal, 2 mounted locks






CombiCard 5000-7000 basic elements



Basic element 1.5 (139.76 mm deep) with air vents

| Model | Order no. | Α | В | C | a1 |
|---------------|-----------|-------|-------|--------|-------|
| BC 5000 L-1,5 | 79002500 | 175,7 | 146,7 | 139,76 | 127,1 |
| BC 6000 L-1,5 | 79002600 | 226,5 | 146,7 | 139,76 | 177,9 |
| BC 7000 L-1,5 | 79002700 | 323 | 146,7 | 139,76 | 274,4 |
| | | | | | |

Scope of delivery: Base element with air vents without seal, 2 mounted locks

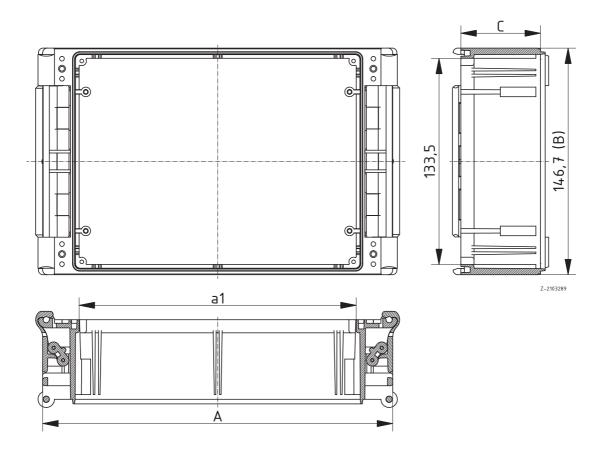



CombiCard 5000-7000 basic elements

Basic element for control panel mounting

| Model | Order no. | Α | В | C | a1 |
|-------------|-----------|-------|-------|---|---|
| BC 5000 NG | 79001610 | 203,7 | 169,7 | 68,01 | 133,3 |
| BC 6000 NG | 79001710 | 254,5 | 169,7 | 68,01 | 184,1 |
| BC 7000 NG | 79001810 | 351 | 169,7 | 68,01 | 280,6 |
| 0 (- - D | 1 | !tls | | - L - L - L - L - L - L - L - L - L - L | and all and all and all and a second the second |

Scope of delivery: Base element with mounted assembly kit for control panel mounting

Note: When these base elements are used, front lids must be used on both sides to close the enclosure. Tightening torque for the fixing elements = 80 Ncm




Basic element for control panel mounting, with air vents

| Model | Order no. | A | В | C | a1 |
|--------------|-----------|-------|-------|-------|-------|
| BC 5000 NG-L | 79001910 | 203,7 | 169,7 | 68,01 | 133,3 |
| BC 6000 NG-L | 79002010 | 254,5 | 169,7 | 68,01 | 184,1 |
| BC 7000 NG-L | 79002110 | 351 | 169,7 | 68,01 | 280,6 |
| O (I I' D | | | | 11716 | 1 1 1 |

Scope of delivery: Base element with mounted assembly kit for control panel mounting

Note: When these base elements are used, front lids must be used on both sides to close the enclosure. Tightening torque for the fixing elements = 80 Ncm



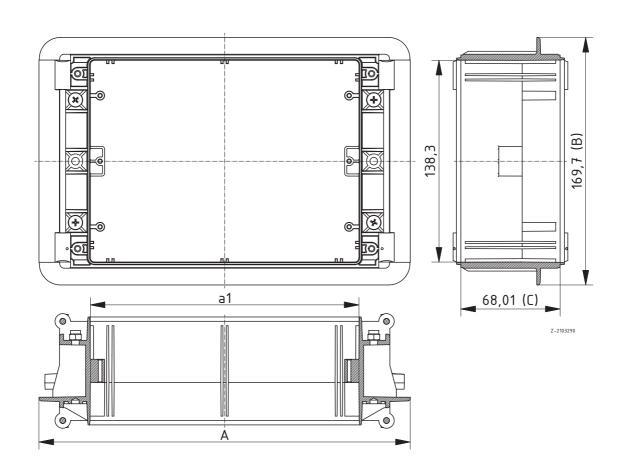





CombiCard 5000-7000 rear lids




Rear lid

| Model | Order no. | Α | В | C | a1 |
|---------|-----------|-------|-------|----|-------|
| RD 5000 | 79000100 | 175,7 | 146,7 | 50 | 132,7 |
| RD 6000 | 79000200 | 226,5 | 146,7 | 50 | 183,5 |
| RD 7000 | 79000300 | 323 | 146,7 | 50 | 280 |

Scope of delivery: Rear lid

Note: A fixing kit BS 5670 is also required for fitting front panels FP..000 I in the rear lid. This elevates the front panel in the rear lid.

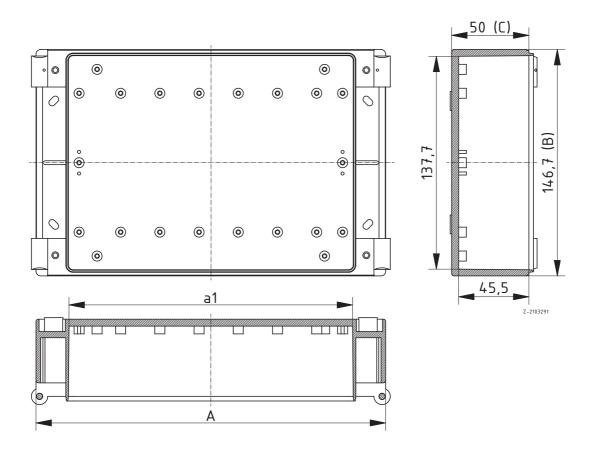



CombiCard 5000-7000 rear lids


Rear lid with terminal compartment

| Model | Order no. | Α | В | C | a1 |
|-----------|-----------|-------|-------|----|-------|
| RD 5000 K | 79000400 | 175,7 | 236,7 | 50 | 132,7 |
| RD 6000 K | 79000500 | 226,5 | 236,7 | 50 | 183,5 |
| RD 7000 K | 79000600 | 323 | 236,7 | 50 | 280 |

Scope of delivery: Rear lid, terminal compartment bar, terminal compartment lid including seal and fixing screws

Note: A fixing kit BS 5670 is also required for fitting front panels FP..000 I in the rear lid. This elevates the front panel in the rear lid.



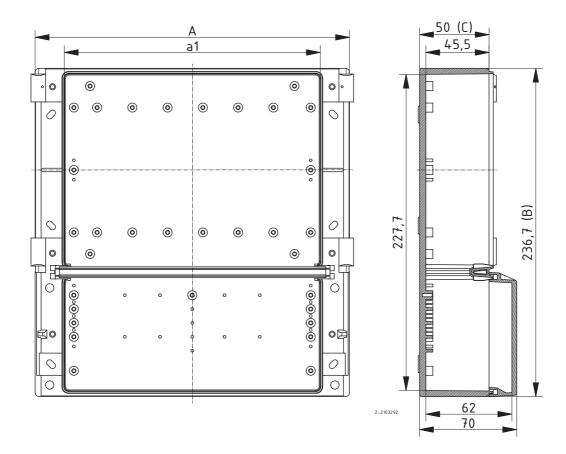



CombiCard 5000-7000 rear lids




Rear lid with terminal compartment on both sides

| Model | Order no. | Α | В | C | a1 |
|------------|-----------|-------|-------|----|-------|
| RD 5000 BK | 79000700 | 175,7 | 326,7 | 50 | 132,7 |
| RD 6000 BK | 79000800 | 226,5 | 326,7 | 50 | 183,5 |
| RD 7000 BK | 79000900 | 323 | 326,7 | 50 | 280 |

Scope of delivery: Rear lid, 2 terminal compartment bars, 2 terminal compartment lids including seal and fixing screws

Note: A fixing kit BS 5670 is also required for fitting front panels FP..000 I in the rear lid. This elevates the front panel in the rear lid.

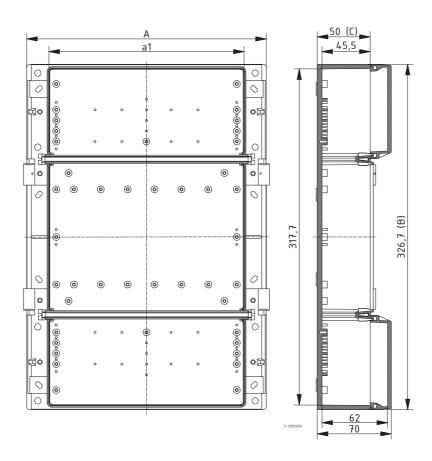



CombiCard 5000-7000 accessories

Wall brackets for rear lid

| Model | Order no. | Note |
|-----------------------|--------------|---|
| WL 5670 | 79004600 | For RD |
| WL 5670 K | 79004700 | For RD K |
| WL 5670 BK | 79004800 | For RD BK |
| Coope of delivery 2 w | all brooksto | including fixing meterial for acrowing the breakets to the roof lid |

Scope of delivery: 2 wall brackets including fixing material for screwing the brackets to the rear lid



Internal front panels for basic elements and rear lid, natural-coloured anodised aluminium

| Model | Order no. | Note |
|-------------------------|-----------|-----------------------------|
| FP 5000 I | 79004000 | |
| FP 6000 I | 79004100 | |
| FP 7000 I | 79004200 | |
| BS 5670 | 79005500 | Assembly kit for FP I in RD |
| Scope of delivery: 1 fr | ont panel | |

Note: For fixing screws for mounting on BC..., see General Accessories, order no. 59006217.



Front panels for FO front, natural-coloured anodised aluminium

| Model | Order no. |
|-------------------------|-----------|
| FP 5000 AI | 79004300 |
| FP 6000 AI | 79004400 |
| FP 7000 AI | 79004500 |
| Scope of delivery: 1 fr | ont panel |

Note: Fixing screws included in scope of delivery for the fronts.



Handle

| Model | Order no. |
|---------|-----------|
| HS 5000 | 79605020 |
| HS 6000 | 79606020 |
| HS 7000 | 79607020 |

Scope of delivery: 1 handle

Note: For fitting the handle, mechanical processing of the enclosure parts is required.









Lock bolt for basic elements for blocking locking function

| Model | Order no. | Note |
|--------------|-----------|---------------|
| SR 5670 -0,5 | 79004900 | For BC(L)-0,5 |
| SR 5670-1 | 79005010 | For BC(L)-1 |
| SR 5670 -1,5 | 79005100 | For BC(L)-1,5 |

Scope of delivery: 2 pieces

Note: The lock bolts can be used to ensure that the hinged quick-release fasteners cannot be opened when the enclosure is closed. The lock bolt can only be moved and the fastener opened after the front-fitted enclosure system part has been opened. This protects a unit against unauthorized access, or restricts the hinged quick-release fastener to the hinge function.



Cover for hinged quick-release fastener

| Model | Order no. | Note |
|---------|-----------|-----------|
| VA 5670 | 79005300 | For FD(G) |

Scope of delivery: 2 pieces

Note: For snapping onto the hinge side of the front lid FD... (G).



Hinged quick-release fastener for retrofitting of FO and FR fronts

| Model | Order no. | Note |
|---------|-----------|-----------|
| SV 5670 | 79005400 | For FO/FR |

Scope of delivery: 2 hinge parts, 1 catch, 1 blind plug



Cylinder catch for FD fronts

| Model | Order no. |
|----------|-----------|
| SHL0-302 | 21008310 |
| N | - L. O. L |

Scope of delivery: 1 lock, 2 keys



CombiCard 5000-7000 accessories

Mounting panel for rear lid RD.. (K,BK) and basic elements, laminated paper

| Model | Order no. |
|--------|-----------|
| M 5000 | 80050000 |
| M 6000 | 80060000 |
| M 7000 | 80070000 |

Scope of delivery: 1 mounting panel

Note: For fixing screws (order no. 59006217), see General Accessories.



Mounting panel for rear lid with terminal compartment RD..K (BK), laminated paper

| Model | Order no. |
|----------|-----------|
| M 5000 K | 80050100 |
| M 6000 K | 80060100 |
| M 7000 K | 80070100 |

Scope of delivery: 1 mounting panel

Note: For fixing screws (order no. 59006217), see General Accessories.



Mounting panel for rear lid with terminal compartment on both sides RD..BK, laminated paper

| Model | Order no. |
|-----------|-----------|
| M 5000 BK | 80050200 |
| M 6000 BK | 80060200 |
| M 7000 BK | 80070200 |


Scope of delivery: 1 mounting panel

Note: For fixing screws (order no. 59006217), see General Accessories.



Welcome to BOPLA City!

CombiCard 5000-7000 accessories



DIN rails

| Model | Order no. | C | Note |
|-------------|-----------|-----|---|
| TS 155000.1 | 22151301 | 130 | Top hat rail DIN EN 60715 TH 15 for CC 5000 |
| TS 156000.1 | 22151801 | 180 | Top hat rail DIN EN 60715 TH 15 for CC 6000 |
| TS 157000.1 | 22152801 | 280 | Top hat rail DIN EN 60715 TH 15 for CC 7000 |
| TS 325000.1 | 22321301 | 130 | Top hat rail DIN EN 60715 G 32 for CC 5000 |
| TS 326000.1 | 22321801 | 180 | Top hat rail DIN EN 60715 G 32 for CC 6000 |
| TS 327000.1 | 22322801 | 280 | Top hat rail DIN EN 60715 G 32 for CC 7000 |
| TS 355000.1 | 22351301 | 130 | Top hat rail DIN EN 60715 TH 35 for CC 5000 |
| TS 356000.1 | 22351801 | 180 | Top hat rail DIN EN 60715 TH 35 for CC 6000 |
| TS 357000.1 | 22352801 | 280 | Top hat rail DIN EN 60715 TH 35 for CC 7000 |

Scope of delivery: 1 DIN rail

Note: For fixing screws see General Accessories.

C = DIN rail length in mm.

Matching terminals and terminal mounting on request.



CombiCard 5000-7000

19" subracks acc. to DIN EN 60297-3-101

Subrack

| Model | Order no. | Note |
|-------------|-----------|------------|
| BGT 5000.PI | 53215000 | 3 U, 20 HP |
| BGT 6000.PI | 53216000 | 3 U, 30 HP |
| BGT 7000.PI | 53217000 | 3 U, 49 HP |

Scope of delivery: 1 subrack, mounting material

Note: For accessories, see Interzoll Modul / Interzoll accessories chapter.



Closed subrack with cover plates

| Model | Order no. | Note |
|----------------|-----------|-------------|
| BGT 5000.PI-AD | 53215100 | 3 U, 20 HP |
| BGT 6000.PI-AD | 53216100 | 3 U, 30 HP |
| BGT 7000.PI-AD | 53217100 | 3 U, 49 HP |
| BG1 7000.11-AD | 33217100 | 5 0, 43 111 |

Scope of delivery: 1 subrack, mounting material

Note: For accessories, see Interzoll Modul / Interzoll accessories chapter.

