



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



ABC400 Series AC-DC Open Frame Power Supplies

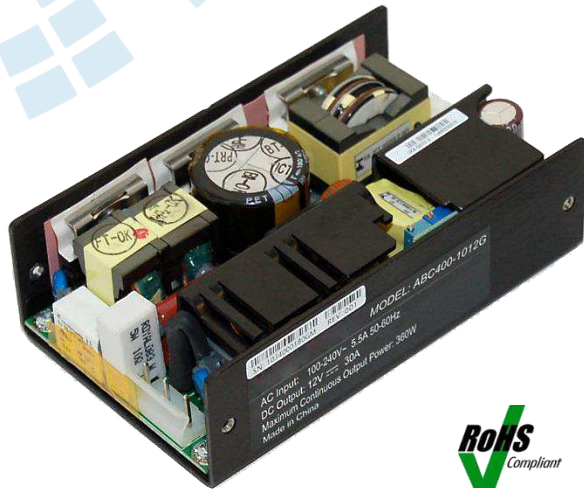

Key Features & Benefits

- High Efficiency up to 91% at 230 VAC
- Universal AC Input Voltage Range: 90-264 VAC
- Active Power Factor Correction
- Over temperature, output overvoltage, overcurrent and short circuit protection
- Low Conducted and Radiated EMI (EN 55022 cl A)
- Safety approved to the latest edition of the following standards: CSA/UL60950-1, EN60950-1 and IEC60950-1
- High Power Density Design: 16 W/in³
- Compact Size: 3.0 (W) x 1.5 (H) x 5.0 (L) inches
- RoHS Compliant
- CE Marked

ABC400 Series is a compact and efficient series of AC-DC open frame power supplies suited for telecom, datacom and many other applications.

The family meets the international information technology safety standards with the CE-Mark for the European Low Voltage Directive (LVD).

Their high efficiency allows a very minimal power loss in end equipment, resulting in higher reliability, ease of thermal management and regulatory approvals for an environmentally friendly end product.

Applications

- Telecom
- Datacom
- Industrial Applications

North America
+1-866.513.2839

Asia-Pacific
+86.755.29885888

Europe, Middle East
+353 61 225 977

tech.support@psbel.com
belpowersolutions.com

ABC400 Series

ORDERING INFORMATION

MODEL	INPUT VOLTAGE RANGE	OUTPUT VOLTAGE	NOM OUTPUT CURRENT	# OF OUTPUTS	OUTPUT POWER
ABC400-1012G	90 – 264 VAC	12 VDC	23 A	1	400 W
ABC400-1024G	90 – 264 VAC	24 VDC	13 A	1	400 W
ABC400-1048G	90 – 264 VAC	48 VDC	6.5 A	1	400 W

OVERVIEW

The ABC400-10XXG is a high efficiency and high power density AC to DC power supply. It incorporates interleaved transition mode PFC converter and well proven two-FET forward converter, providing increased system reliability and high efficiency with around 1m/s system air cooling, ABC400-1012G can delivery up to 360W continuous output power and 408W for ABC400-1024G and ABC400-1048G.

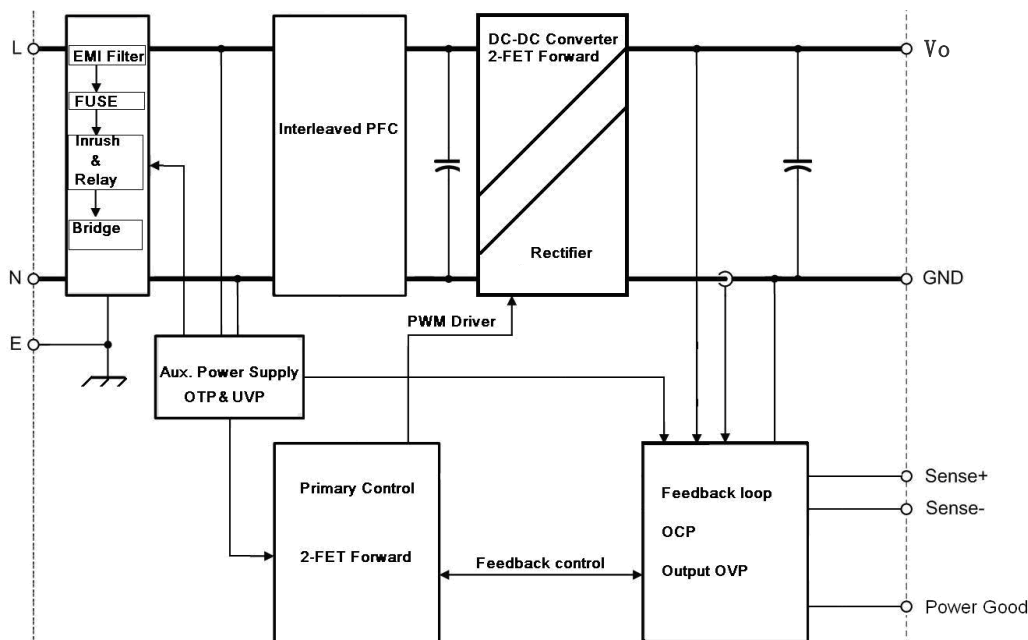


Figure 1: ABC400-10XXG block diagram

ABSOLUTE MAXIMUM RATINGS

Stresses in excess of the absolute maximum ratings may cause performance degradation, adversely affect long-term reliability, and cause permanent damage to the supply.

PARAMETER	CONDITIONS / DESCRIPTION	MIN	NOM	MAX	UNIT
V_{maxc}	Max Continuous Input			264	VAC
	Transient, 60 ms			300	VAC

ENVIRONMENTAL AND MECHANICAL

PARAMETER	CONDITIONS / DESCRIPTION	MIN	NOM	MAX	UNIT
T_A	Ambient temperature	V_{min} to V_{max} , I_o nom, I_{SB} nom	-10	+50	°C
T_{Aext}	Extended temp range	Derated output	+50	+70	°C
T_S	Storage temperature	Non-operational	-40	+85	°C
Dimensions	Width		76.2		mm
	Height		38.1		mm
	Depth		127.0		mm
M	Weight		0.5		kg

+1.866.513.2839

tech.support@psbel.com

belpowersolutions.com

ABC400 Series

INPUT SPECIFICATIONS

General Condition: $T_A = -10 \dots 50 \text{ }^\circ\text{C}$ unless otherwise noted. Active fan air cooling required: 200 LFM (1 m/s)

PARAMETER	CONDITIONS / DESCRIPTION	MIN	NOM	MAX	UNIT
$V_{in\text{nom}}$	Nominal input voltage	100		240	VAC
V_I	Input voltage ranges	90		264	VAC
$I_{I\text{max}}$	Max input current			6.5	A _{rms}
I_p	Inrush current limitation	$V_{in\text{nom}} = 115 \text{ VAC}$, $T = 25^\circ\text{C}$ (see Figure 2) $V_{in\text{nom}} = 230 \text{ VAC}$, $T = 25^\circ\text{C}$ (see Figure 3)		30 60	A _p
F_I	Input frequency	47	50/60	63	Hz
PF	Power factor	$V_{in\text{nom}} = 264 \text{ VAC}$, $> 0.5 \cdot I_{o\text{nom}}$			W/VA
$V_{I\text{on}}$	Turn-on input voltage ¹	Ramping up		88	VAC
$V_{I\text{off}}$	Turn-off input voltage ¹	Ramping down		80	VAC
η	Efficiency	$V_{in\text{nom}} = 230 \text{ VAC}$, $0.5 \cdot I_{o\text{nom}}$, $V_o\text{nom}$, $T_A = 25 \text{ }^\circ\text{C}$ $V_{in\text{nom}} = 230 \text{ VAC}$, $1.0 \cdot I_{o\text{nom}}$, $V_o\text{nom}$, $T_A = 25 \text{ }^\circ\text{C}$		89 90	%
T_{hold}	Hold-up Time	After last AC zero point, V_o within regulation, $V_I = 115 \text{ VAC}$, $P_o\text{nom}$		16	ms

INPUT FUSE

A slow-blow 8A input fuses (5 × 20 mm) in series with live line inside the power supply protects against severe defects. The fuse and a VDR form together with the input filter an effective protection against high input transients.

INRUSH CURRENT

The AC-DC power supply exhibits an X-capacitance of only 1.47 μF , resulting in a low and short peak current, when the supply is connected to the mains. The internal bulk capacitor will be charged through an power resistor which will limit the inrush current (see Figure 2 and 3).

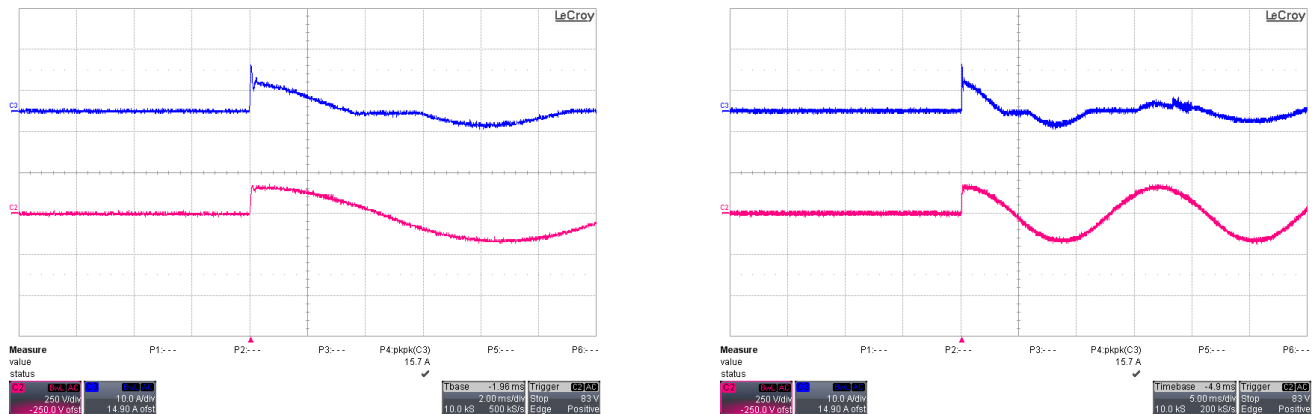


Figure 2: Inrush current, $V_{in} = 115\text{Vac}$, 90°CH2 : V_{in} (250V/div), CH3 : I_{in} (10A/div)

¹ The power supply is provided with a minimum hysteresis of 8 V during turn-on and turn-off within the ranges.

ABC400 Series

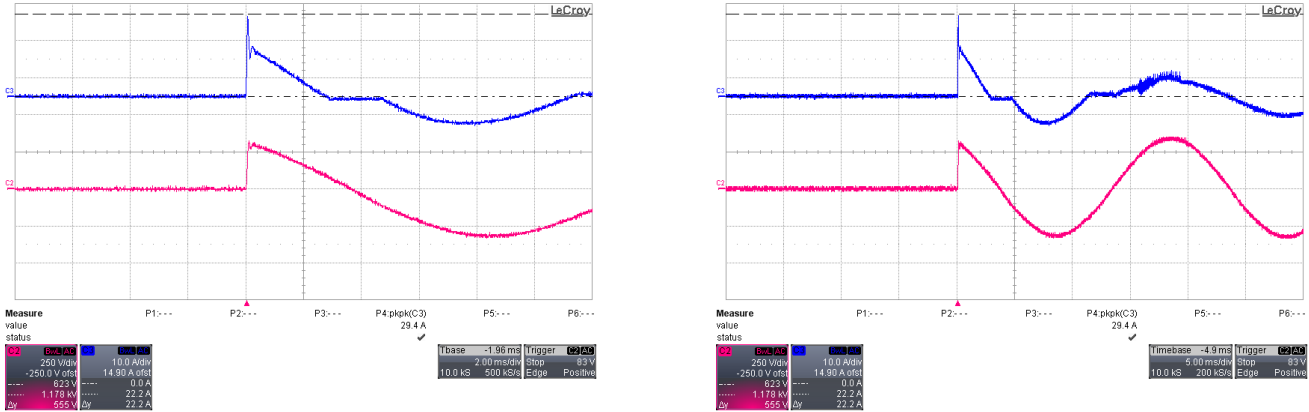


Figure 3: Inrush current, $V_{in} = 230V_{ac}$, 90° CH2: V_{in} (250V/div), CH3: i_{in} (10A/div)

INPUT UNDER-VOLTAGE

If the sinusoidal input voltage stays below the input under voltage lockout threshold V_{on} , the supply will be inhibited. Once the input voltage returns within the normal operating range, the supply will return to normal operation again.

POWER FACTOR CORRECTION

Power factor correction (PFC) is achieved by controlling the input current waveform synchronously with the input voltage. A specified PFC controller is implemented in the interleaved transition mode topology giving outstanding PFC results over a wide input voltage and load ranges. The input current will follow the shape of the input voltage.

EFFICIENCY

The high efficiency (see Figure 4, 5 and 6) is achieved by using state-of-the-art silicon power devices in conjunction with interleaved transition mode PFC topology minimizing switching losses. Synchronous rectifiers on the output reduce the losses in the high current output path for ABC400-1012G schottky diode and ultra-fast diode are used as rectifiers for ABC400-1024G and ABC400-1048G due to the high output voltage level.

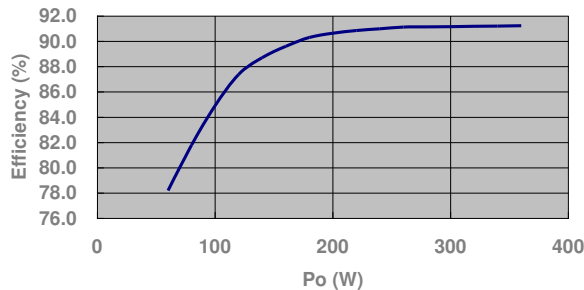


Figure 4: Efficiency vs. Output Power at 230VAC, ABC400-1012G

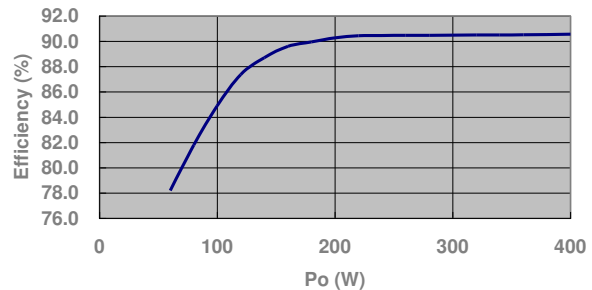


Figure 5: Efficiency vs. Output Power at 230VAC, ABC400-1024G

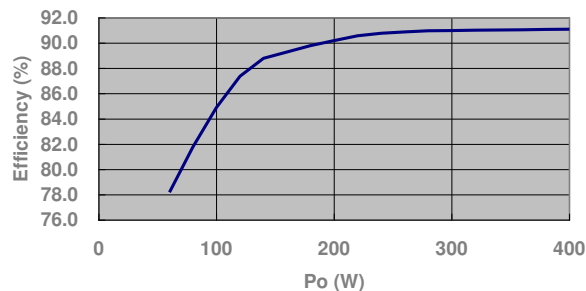


Figure 6: Efficiency vs. Output Power at 230VAC, ABC400-1048G

ABC400 Series

OUTPUT SPECIFICATIONS

General Condition: $T_A = -10 \dots +50 \text{ }^\circ\text{C}$ unless otherwise noted. Active fan air cooling required: 200 LFM (1 m/s)

PARAMETER		CONDITIONS / DESCRIPTION		MIN	NOM	MAX	UNIT
Main Output V _o							
V _o	Nominal Output Voltage	0.5 · I _o , T _{amb} = 25 °C	ABC400-1012G		12.0		VDC
			ABC400-1024G		24.0		VDC
			ABC400-1048G		48.0		VDC
V _{o set}	Output Set Point Accuracy	0.5 · I _o , T _{amb} = 25 °C	ABC400-1012G	-50		50	mV
			ABC400-1024G	-75		75	mV
			ABC400-1048G	-150		150	mV
P _{o nom}	Nominal Output Power		ABC400-1012G	0	276	360	W
			ABC400-1024G	0	312	408	W
			ABC400-1048G	0	312	408	W
I _{o nom}	Nominal Output Current		ABC400-1012G	0	23	30	A
			ABC400-1024G	0	13	17	A
			ABC400-1048G	0	6.5	8.5	A
V _{o p-p}	Output Ripple Voltage	V _{o nom} , I _{o nom} , 20 MHz BW	ABC400-1012G		60	120	mVpp
			ABC400-1024G		80	240	mVpp
			ABC400-1048G		150	480	mVpp
dV _{o Load}	Load Regulation	V _i = V _{i nom} , 0 - 100 % I _{o nom}	ABC400-1012G	-360	50	360	mV
			ABC400-1024G	-720	80	720	mV
			ABC400-1048G	-1440	130	1440	mV
dV _{o Line}	Line Regulation	V _i = V _{i min} ... V _{i max}	ABC400-1012G	-360	80	360	mV
			ABC400-1024G	-720	120	720	mV
			ABC400-1048G	-1440	150	1440	mV
dV _{dyn}	Dynamic Load Regulation	ΔI _o = 50% I _{o nom} , I _o = 50 ... 100% I _{o nom} , dI _o /dt = 1A/μs, recovery within 5% of V _{o nom}	ABC400-1012G	-0.6	0.25	0.6	V
			ABC400-1024G	-1.2	0.45	1.2	V
			ABC400-1048G	-2.4	0.7	2.4	V
t _{rec}	Recovery Time					2	ms
t _{delay}	Turn-On Delay	Time required for output within regulation after intial application of AC input @ 90 VAC		0	1	2	Sec
t _{rise}	Turn On Rise Time	V _O = 10...90% V _{O nom}	ABC400-1012G			20	ms
			ABC400-1024G			20	ms
			ABC400-1048G			30	ms
C _{Load}	Capacitive Loading		ABC400-1012G			6600	μF
			ABC400-1024G			3740	μF
			ABC400-1048G			1870	μF

ABC400 Series

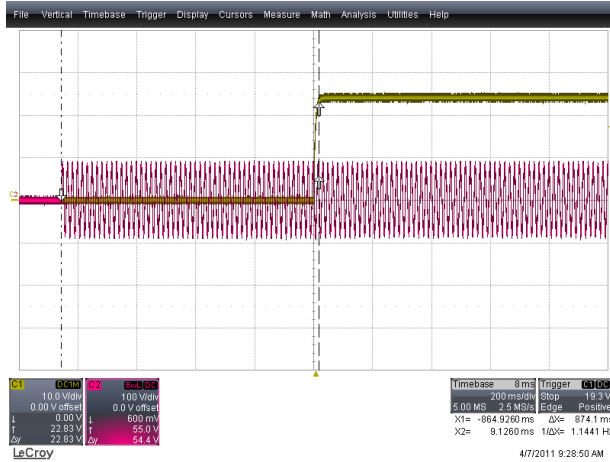


Figure 7: Turn-On AC Line 115 VAC, full load (200 ms/div)
CH1: V_o (10 V/div) CH2: V_{in} (100 V/div)

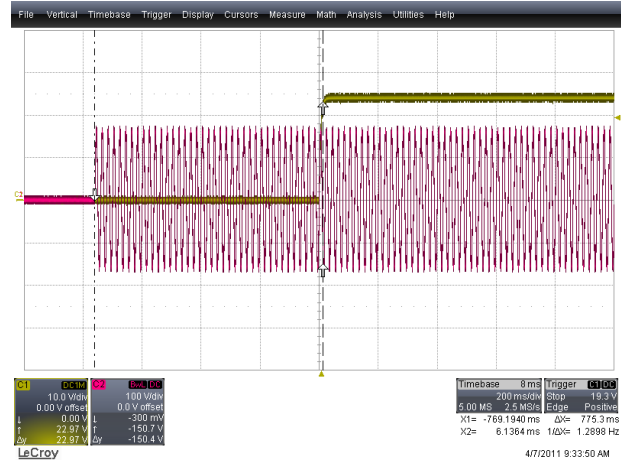


Figure 8: Turn-On AC Line 230 VAC, full load (200 ms/div)
CH1: V_o (10 V/div) CH2: V_{in} (100 V/div)

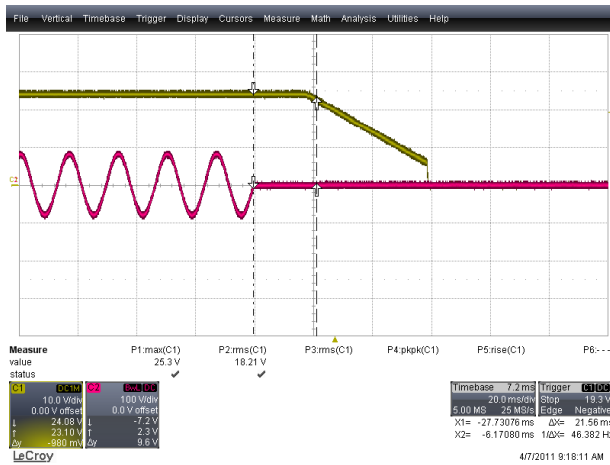


Figure 9: Turn-Off AC Line 115 VAC, full load (10 ms/div)
CH1: V_o (10 V/div) CH2: V_{in} (100 V/div)

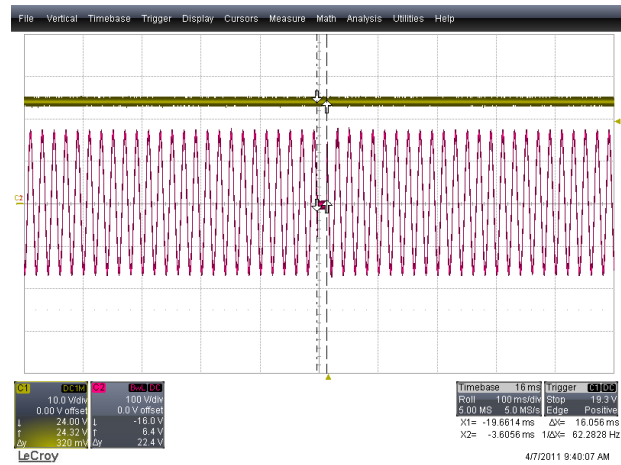


Figure 10: AC drop out 16ms (100 ms/div)
CH1: V_o (10 V/div) CH2: V_{in} (100 V/div)

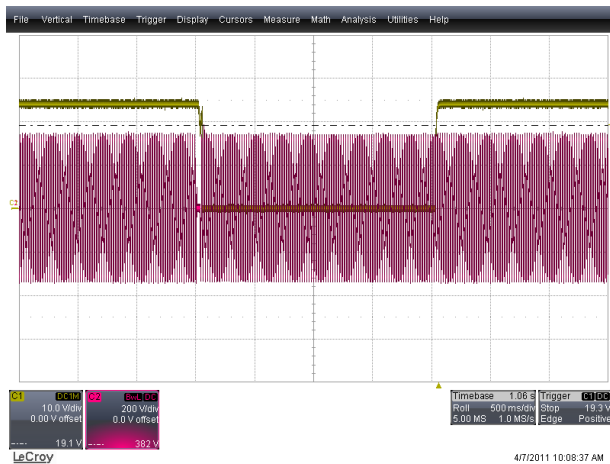


Figure 11: AC drop out 30ms (500 ms/div), V_o restart
CH1: V_o (10 V/div) CH2: V_{in} (200 V/div)

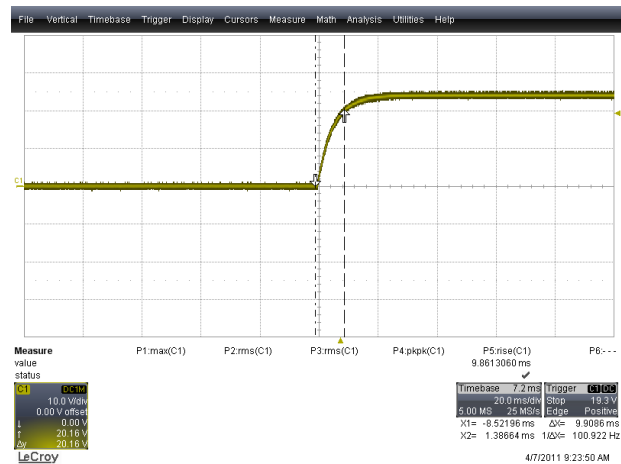


Figure 12: V_o rise time at 115VAC (20 ms/div)
CH1: V_o (10 V/div)

ABC400 Series

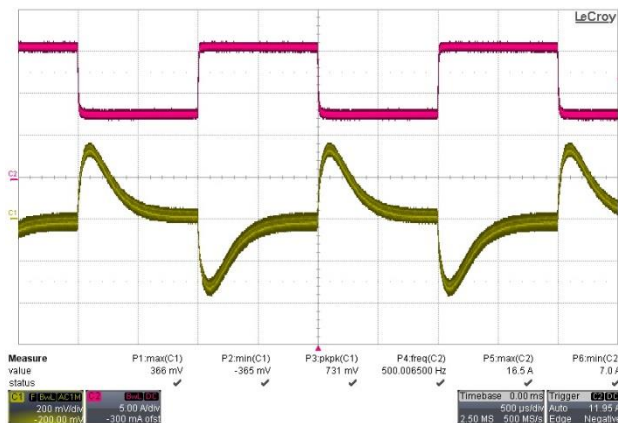


Figure 13: Load transient V_o (500µs/div), 8.5A <-> 17A 2A/µs

CH1: V_o (200mV/div) CH2: I_o (5.0 A/div)

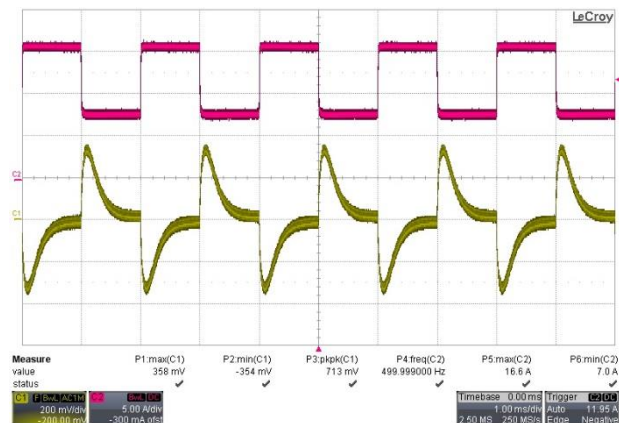


Figure 14: Load transient V_o (1.0ms/div), 8.5A <-> 17A, 2A/µs

CH1: V_o (200 mV/div) CH2: I_o (5 A/div)

PROTECTION

PARAMETER	CONDITIONS / DESCRIPTION	MIN	NOM	MAX	UNIT
F	Input Fuses (L only)	Not user accessible, time lag characteristic			A
Vo ov	OV Threshold	ABC400-1012G	14.0	16.0	VDC
		ABC400-1024G	28.0	32.0	VDC
		ABC400-1048G	53	57	VDC
I _{o lim}	Current Limit	ABC400-1012G	31.5	33.0	A
		ABC400-1024G	20.0	21.0	A
		ABC400-1048G	8.9	10	A
T _{SD}	Over Temperature on Heat Sinks	Automatic shut-down			100 °C

OVERVOLTAGE PROTECTION

The AC-DC power supply provides a fixed threshold overvoltage (OV) protection implemented with a HW comparator. Once an OV condition has been triggered, the supply will shut down and latch the fault condition. the latch can be unlocked by disconnecting the supply from the AC mains only.

CURRENT LIMITATION

The main output current limitation will decrease with linear derating to 50% at 70 °C if the ambient (inlet) temperature increases beyond 50 °C (see Figure 15).

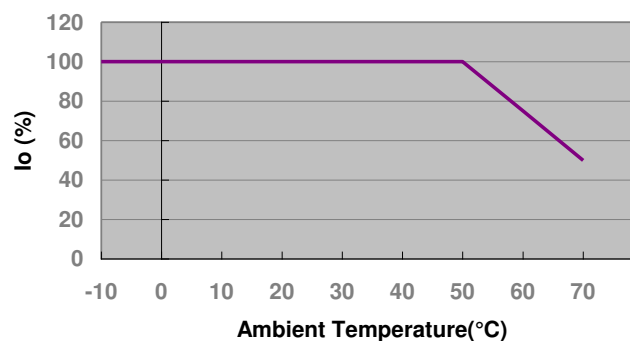


Figure 15: Output Current Limitation Curve

+1.866.513.2839
tech.support@psbel.com
belpowersolutions.com

ABC400 Series

POWER GOOD SIGNAL

The Out-OK output gives a status indication of the converter and the output voltages. It can be used for control functions such as data protection, central system monitoring or as a part of a self-testing system. Connecting the Out-OK as shown in *Figure 16*, $V_{OK} < 1.0\text{ V}$ indicates that the output voltage(s) of the converter are within the range.

Note: using the potentiometer, the monitor level tracks the programmed output voltage. In an error condition, if the output voltage is out of range due to overload or an external overvoltage, V_{OK} will approach V_p . The output is formed by an NPN transistor. The signal is isolated from the output.

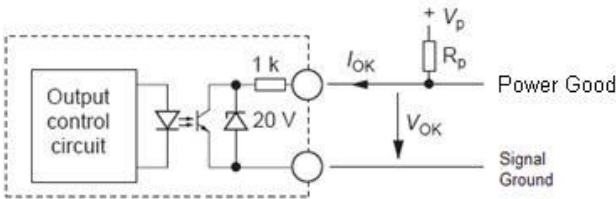


Figure 16: Power Good signal

Power Good Signal Description:

- 1. O/P V OK – Signal Low, Opto conducting, (max sink current 0.5 mA)
- 2. O/P V Bad – Signal High, Opto opening, (max leakage current 25 μA)

ELECTROMAGNETIC COMPATIBILITY

IMMUNITY

Note: Most of the immunity requirements are derived from EN 55024:1998/A2:2003.

TEST	STANDARD / DESCRIPTION	CRITERIA
ESD Contact Discharge	EN 61000-4-2, Level 2	A
RF Susceptibility	EN 61000-4-3, Level 3	A
Fast Transient/Burst	EN 61000-4-4, Level 3	B
Surge	EN 61000-4-5, Class 3	B
RF Conducted Immunity	EN 61000-4-6, Class 3	A
Voltage Dips and Interruptions	EN 61000-4-11	C
Magnetic Fields	EN 61000-4-8	A

ABC400 Series

SAFETY / APPROVALS

Maximum electric strength testing is performed in the factory according to IEC/EN 60950, and UL 60950. input-to-output electric strength tests should not be repeated in the field. Bel Power Solutions will not honor any warranty claims resulting from electric strength field tests.

PARAMETER	DESCRIPTION / CONDITIONS	MIN	NOM	MAX	UNIT
Safety Approvals	Safety approved to the latest edition of the following standards: CSA/UL60950-1, EN60950-1 and IEC60950-1. CE Mark for LVD CB Approval				
Insulation Safety Rating	Input / Case		Basic		
	Input / Output		Reinforced		
	Output / Case		Functional		
dc Creepage / Clearance	Primary (L/N) to protective earth (PE)		According to safety standard		mm
	Primary to secondary				mm
Electrical Strength Test	Input to case		2121		VDC
	Input to output		4242		VDC
	Output and Signals to case		707		VDC

MECHANICAL

DIMENSIONS

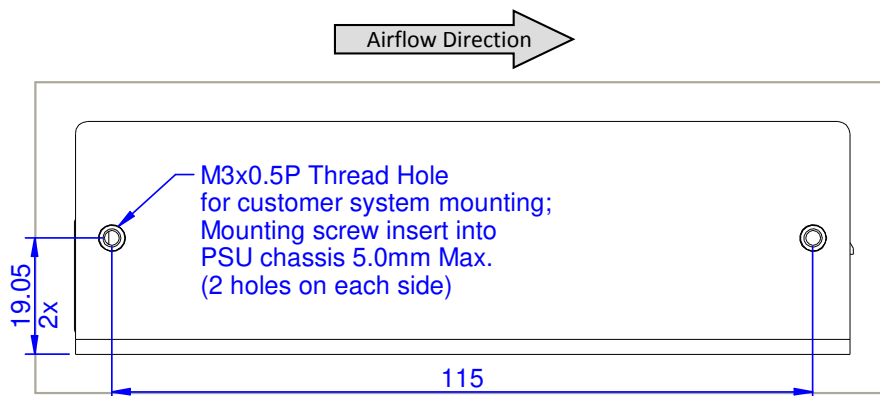


Figure 17: Side view 1


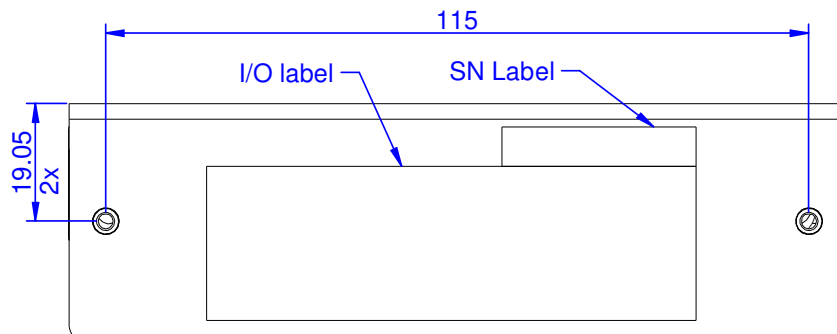



Figure 18: Side view 2

Note: A 3D step file of the power supply casing is available on request.

ABC400 Series

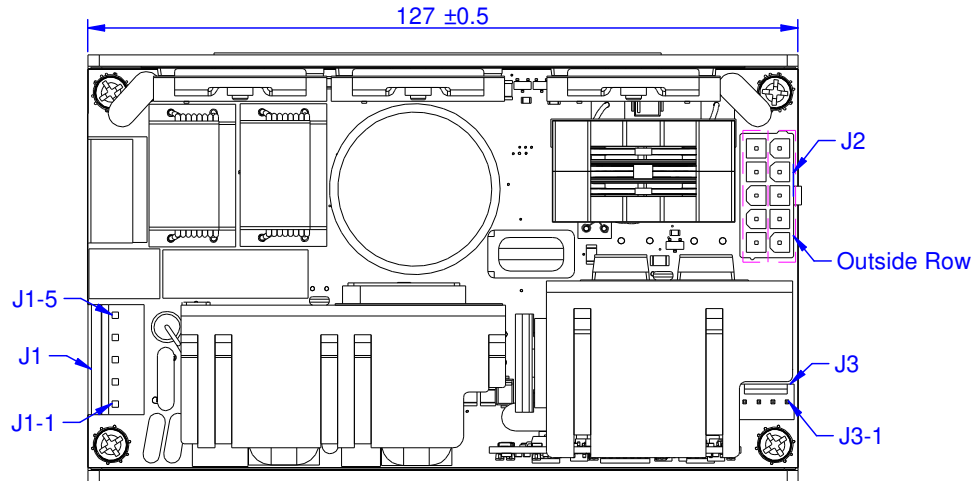

Airflow Direction → Figure 19: Top view

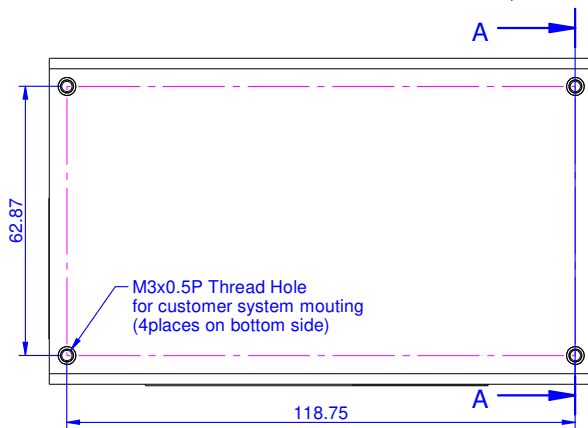

Section A-A

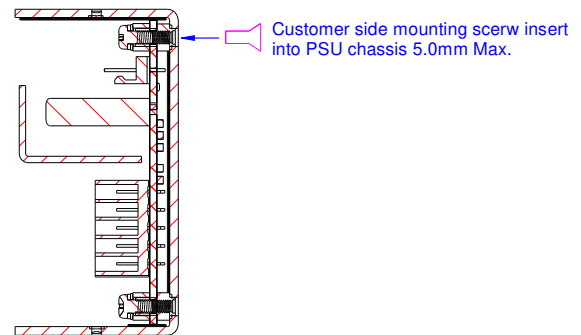


Figure 20: Bottom view 2

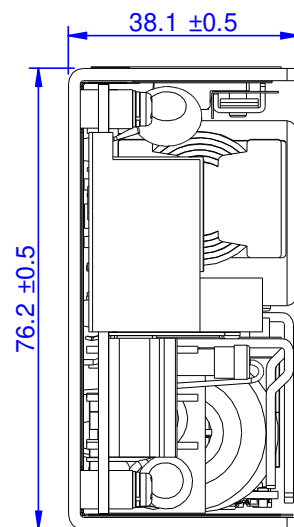


Figure 21: Front view

ABC400 Series

CONNECTIONS

PIN	NAME	DESCRIPTION
Input Connector J1		
J1- 1	Earth	AC Input Earth
J1- 2	Not fitted	NA
J1- 3	Live	AC Input Live
J1- 4	Not fitted	NA
J1- 5	Neutral	AC Input Neutral
Output Connector J2		
J2-outside row	+Vo	+12V / +24V / +48V Output
J2-inside row	-Vo	+12V / +24V / +48V Output Return
Signal Connector J3		
J3- 1	-Vo Sense	Output Negative Sense
J3- 2	+Vo Sense	Output Positive Sense
J3- 3	Power Good	Power Good Signal
J3- 4	Power Good Return	Power Good Signal Return

Connector Mating Parts (Molex or equivalent)

CONNECTOR	HOUSING	CRIMP TERMINAL	WIRE GAUGE
J1	09-50-3051	08-50-0105	AWG#18
J2	39-01-2105	44476-3112	AWG#16
J3	22-01-3047	08-50-0113	AWG#22-30

For more information on these products consult: tech.support@psbel.com

NUCLEAR AND MEDICAL APPLICATIONS - Products are not designed or intended for use as critical components in life support systems, equipment used in hazardous environments, or nuclear control systems.

TECHNICAL REVISIONS - The appearance of products, including safety agency certifications pictured on labels, may change depending on the date manufactured. Specifications are subject to change without notice.