



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China






# ARDUINO YÚN REV 2


Code: ABX00020

The Yún Rev 2, Linux powered board with the Arduino simplicity, is the perfect board for your IoT projects!

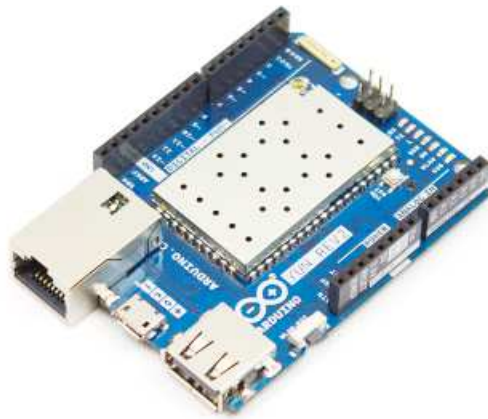

The Yún rev. 2 with the power of a Linux based system that enables advanced network connections and applications.

Connection to your WiFi or wired network is simple thanks to the Yún Web Panel and the dedicated "YunFirstConfig" sketch. The Web panel allows you to manage your shield preferences and upload your sketch. The Yún rev. 2 uses the Bridge library and so extends the board capabilities by using the Linux processor. As always, every element of the platform – hardware, software and documentation – is freely available and open-source. This means that you can learn exactly how it's made and use its design as the starting point for your own projects.

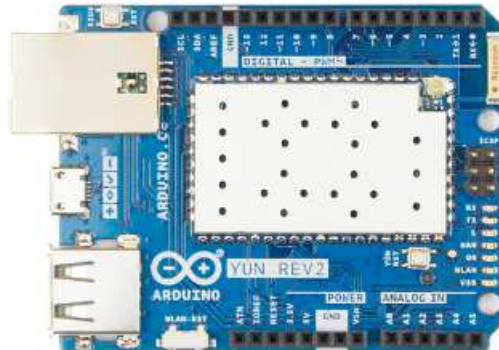


## AVR Arduino microcontroller

Microcontroller	<a href="#">ATmega32U4</a>
Operating Voltage	5V
Input Voltage	5V
Digital I/O Pins	20
PWM Output	7
Analog I/O Pins	12
DC Current per I/O Pin	40 mA on I/O Pins; 50 mA on 3,3 Pin
Flash Memory	32 KB (of which 4 KB used by bootloader)
SRAM	2.5 KB
EEPROM	1 KB
Clock Speed	16 MHz

## Linux Microprocessor

Processor	<a href="#">Atheros AR9331</a>
Architecture	MIPS
Operating Voltage	3.3V
Ethernet	802.3 10/100Mbit/s
WiFi	802.11b/g/n 2.4 GHz
USB Type	2.0 Host
Card Reader	Micro-SD
RAM	64 MB DDR2
Flash Memory	16 MB
Clock Speed	400 MHz

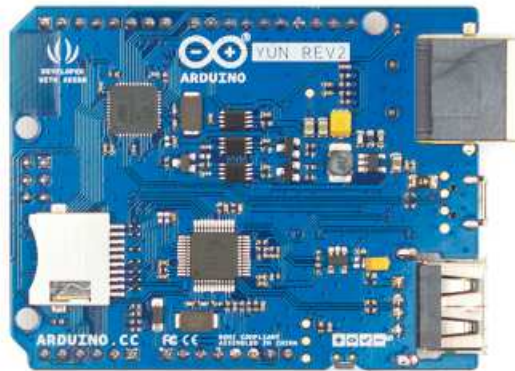

### Compatibility

The Yún Rev. 2 board allows you to connect to the internet using the onboard WiFi or Ethernet connection. Furthermore thanks to the [Bridge library](#) it able to extend the functionalities of the Microprocessor by using the computational power of the Linux processor on the shield. Using the Yún Web Panel it is also possible to configure all the shield-related features and remotely upload sketches on the board connected to the shield.

### On-board Indicators

The shield contains a number of signalling LEDs :

- ON (green): indicates that the shield is properly powered
- WLAN (blue): indicates a connection to a wireless network
- WAN (red): indicates connection to ethernet
- USB (white) : indicates system activity and/or if a USB key is mounted