



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China

Data Sheet

AD8675

FEATURES

- Very low voltage noise: 2.8 nV/ $\sqrt{\text{Hz}}$
- Rail-to-rail output swing
- Low input bias current: 2 nA maximum
- Very low offset voltage: 75 μV maximum
- Low input offset drift: 0.6 $\mu\text{V}/^{\circ}\text{C}$ maximum
- Very high gain: 120 dB
- Wide bandwidth: 10 MHz typical
- $\pm 5 \text{ V}$ to $\pm 18 \text{ V}$ operation

APPLICATIONS

- Precision instrumentation
- PLL filters
- Laser diode control loops
- Strain gage amplifiers
- Medical instrumentation
- Thermocouple amplifiers


GENERAL DESCRIPTION

The AD8675 precision operational amplifier has ultralow offset, drift, and voltage noise combined with very low input bias currents over the full operating temperature range. The AD8675 is a precision, wide bandwidth op amp featuring rail-to-rail output swings and very low noise. Operation is fully specified from $\pm 5 \text{ V}$ to $\pm 15 \text{ V}$.


The AD8675 features a rail-to-rail output like that of the OP184, but with wide bandwidth and even lower voltage noise, combined with the precision and low power consumption like that of the industry-standard OP07 amplifier. Unlike other low noise, rail-to-rail op amps, the AD8675 has very low input bias current and low input current noise.

With typical offset voltage of only 10 μV , offset drift of 0.2 $\mu\text{V}/^{\circ}\text{C}$, and noise of only 0.10 μV p-p (0.1 Hz to 10 Hz), the AD8675 is perfectly suited for applications where large error sources cannot be tolerated. For applications with even lower offset tolerances, the proprietary nulling capability allows a combination of both device and system offset errors up to 3.5 mV (referred to the input) to be compensated externally. Unlike previous circuits, the AD8675 accommodates this adjustment without adversely affecting the offset drift, CMRR, and PSRR of the amplifier. Precision instrumentation, PLL, and other precision filter circuits, position and pressure sensors, medical instrumentation, and strain gage amplifiers benefit greatly from the very low noise, low input bias current, and wide bandwidth. Many systems can

PIN CONFIGURATIONS


Figure 1. 8-Lead SOIC_N (R-8)

05564-001


Figure 2. 8-Lead MSOP (RM-8)

05564-002

take advantage of the low noise, dc precision, and rail-to-rail output swing provided by the AD8675 to maximize SNR and dynamic range.

The smaller packages and low power consumption afforded by the AD8675 allow maximum channel density or minimum board size for space-critical equipment.

The AD8675 is specified for the extended industrial temperature range (-40°C to $+125^{\circ}\text{C}$). The AD8675 amplifier is available in the tiny 8-lead MSOP, and the popular 8-lead, narrow SOIC, RoHS compliant packages. MSOP packaged devices are only available in tape and reel format.

For the dual version of this ultraprecision, rail-to-rail op amp, see the AD8676 data sheet.

The AD8675 and AD8676 are members of a growing series of low noise op amps offered by Analog Devices, Inc.

Table 1. Voltage Noise

Package	0.9 nV	1.1 nV	1.8 nV	2.8 nV	3.8 nV
Single	AD797	AD8597	ADA4004-1	AD8675	AD8671
Dual		AD8599	ADA4004-2	AD8676	AD8672
Quad			ADA4004-4		AD8674

Rev. E

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.

AD8675* PRODUCT PAGE QUICK LINKS

Last Content Update: 02/23/2017

COMPARABLE PARTS

View a parametric search of comparable parts.

EVALUATION KITS

- EVAL-OPAMP-1 Evaluation Board

DOCUMENTATION

Application Notes

- AN-358: Noise and Operational Amplifier Circuits

Data Sheet

- AD8675: 36 V Precision, 2.8 nV/ $\sqrt{\text{Hz}}$ Rail-to-Rail Output Op Amp Data Sheet

TOOLS AND SIMULATIONS

- Analog Filter Wizard
- Analog Photodiode Wizard
- AD8675 SPICE Macro Model

REFERENCE DESIGNS

- CN0169
 - CN0191
 - CN0200
 - CN0257
 - CN0318
-

DESIGN RESOURCES

- AD8675 Material Declaration
- PCN-PDN Information
- Quality And Reliability
- Symbols and Footprints

DISCUSSIONS

View all AD8675 EngineerZone Discussions.

SAMPLE AND BUY

Visit the product page to see pricing options.

TECHNICAL SUPPORT

Submit a technical question or find your regional support number.

DOCUMENT FEEDBACK

Submit feedback for this data sheet.

TABLE OF CONTENTS

Features	1	Thermal Resistance	5
Applications	1	Power Sequencing	5
Pin Configurations	1	ESD Caution.....	5
General Description	1	Typical Performance Characteristics	6
Revision History	2	Test Circuit	11
Specifications.....	3	Outline Dimensions	12
Electrical Specifications.....	3	Ordering Guide	12
Absolute Maximum Ratings.....	5		

REVISION HISTORY

7/12—Rev. D to Rev. E

Added Power Sequencing Section.....	5
Added Figure 28 and Figure 29; Renumbered Sequentially	10

8/11—Rev. C to Rev. D

Added Input Capacitance, Common Mode Parameter and Input Capacitance, Differential Mode Parameter, Table 3.....	4
---	---

6/10—Rev. B to Rev. C

Changes to Figure 10.....	7
---------------------------	---

5/10—Rev. A to Rev. B

Changes to General Description Section	1
Added Table 1; Renumbered Sequentially	1
Changes to Table 2.....	3
Changes to Table 3.....	4
Changes to Table 4 and Table 5.....	5
Changes to Figure 4 and Figure 6 to Figure 8.....	6
Changes to Figure 15.....	8
Changes to Figure 21 and Figure 24.....	9
Added Figure 27; Renumbered Sequentially	10
Updated Outline Dimensions	12
Changes to Ordering Guide	12

4/07—Rev. 0 to Rev. A

Added Figure 7 and Figure 8; Renumbered Sequentially	6
--	---

10/05—Revision 0: Initial Version

SPECIFICATIONS

ELECTRICAL SPECIFICATIONS

$V_S = \pm 5.0$ V, $V_{CM} = 0$ V, $V_O = 0$ V, $T_A = +25^\circ\text{C}$, unless otherwise specified.

Table 2.

Parameter	Symbol	Test Conditions/Comments	Min	Typ	Max	Unit
INPUT CHARACTERISTICS						
Offset Voltage	V_{OS}	$-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$	10	75		μV
Offset Voltage Drift	$\Delta V_{OS}/\Delta T$	$-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$	12	240		$\mu\text{V}/^\circ\text{C}$
Input Bias Current	I_B	$-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$	-2	+0.5	+2	nA
Input Offset Current	I_{OS}	$-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$	-5.5	-2	+5.5	nA
Input Voltage Range	IVR	$-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$	-1	+0.1	+1	nA
Common-Mode Rejection Ratio	CMRR	$V_{CM} = -3.0$ V to $+3.0$ V $-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$	105	130		dB
Open-Loop Gain	A_{VO}	$R_L = 2 \text{ k}\Omega$ to ground, $V_O = -3.5$ V to $+3.5$ V $-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$	120	126		dB
			117			dB
OUTPUT CHARACTERISTICS						
Output Voltage High	V_{OH}	$R_L = 10 \text{ k}\Omega$ to ground $-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$	4.90	4.95		V
		$R_L = 2 \text{ k}\Omega$ to ground $-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$	4.85			V
			4.80	4.90		V
			4.75			V
Output Voltage Low	V_{OL}	$R_L = 10 \text{ k}\Omega$ to ground $-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$	-4.98	-4.90		V
		$R_L = 2 \text{ k}\Omega$ to ground $-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$		-4.85		V
				-4.91	-4.86	V
					-4.82	V
Short-Circuit Limit	I_{SC}		± 35			mA
POWER SUPPLY						
Power Supply Rejection Ratio	PSRR	$V_S = \pm 5.0$ V to ± 15.0 V $-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$	120	140		dB
Supply Current/Amplifier	I_{SY}	$V_O = 0$ V $-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$	120	2.3	2.7	mA
					3.4	mA
DYNAMIC PERFORMANCE						
Slew Rate	SR	$R_L = 2 \text{ k}\Omega$		2.5		$\text{V}/\mu\text{s}$
Gain Bandwidth Product	GBP			10		MHz
NOISE PERFORMANCE						
Voltage Noise	$e_{n,p-p}$	0.1 Hz to 10 Hz		0.1		$\mu\text{V p-p}$
Voltage Noise Density	e_n	$f = 1 \text{ kHz}$		2.8		$\text{nV}/\sqrt{\text{Hz}}$
Current Noise Density	i_n	$f = 10 \text{ Hz}$		0.3		$\text{pA}/\sqrt{\text{Hz}}$

$V_S = \pm 15$ V, $V_{CM} = 0$ V, $V_O = 0$ V, $T_A = +25^\circ\text{C}$, unless otherwise specified.

Table 3.

Parameter	Symbol	Test Conditions/Comments	Min	Typ	Max	Unit
INPUT CHARACTERISTICS						
Offset Voltage	V_{OS}	$-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$	10	75		μV
Offset Voltage Drift	$\Delta V_{OS}/\Delta T$	$-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$	12	240		$\mu\text{V}/^\circ\text{C}$
Input Bias Current	I_B	$-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$	-2	+0.5	+2	nA
Input Offset Current	I_{OS}	$-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$	-4.5	+1	+4.5	nA
Input Voltage Range	IVR	$-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$	-1	+0.1	+1	nA
Common-Mode Rejection Ratio	CMRR	$V_{CM} = -12.5$ V to $+12.5$ V $-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$	-12.5		+12.5	V
Open-Loop Gain	A_{VO}	$R_L = 2 \text{ k}\Omega$ to ground, $V_O = -13.5$ V to $+13.5$ V $-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$	114	130		dB
Input Capacitance, Common Mode	C_{INCM}		114			dB
Input Capacitance, Differential Mode	C_{INDM}		117	3.8		pF
OUTPUT CHARACTERISTICS						
Output Voltage High	V_{OH}	$R_L = 10 \text{ k}\Omega$ to ground $-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$	14.85	14.92		V
		$R_L = 2 \text{ k}\Omega$ to ground $-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$	14.80			V
		$R_L = 10 \text{ k}\Omega$ to ground $-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$	14.60	14.80		V
		$R_L = 2 \text{ k}\Omega$ to ground $-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$	14.40			V
Output Voltage Low	V_{OL}	$R_L = 10 \text{ k}\Omega$ to ground $-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$	-14.96	-14.94		V
		$R_L = 2 \text{ k}\Omega$ to ground $-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$	-14.90			V
		$R_L = 10 \text{ k}\Omega$ to ground $-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$	-14.85	-14.75		V
		$R_L = 2 \text{ k}\Omega$ to ground $-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$	-14.69			V
Short-Circuit Limit	I_{SC}			± 35		mA
POWER SUPPLY						
Power Supply Rejection Ratio	PSRR	$V_S = \pm 5.0$ V to ± 15.0 V $-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$	120	140		dB
Supply Current/Amplifier	I_{SY}	$V_O = 0$ V $-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$	120	2.5	2.9	dB
					3.8	mA
DYNAMIC PERFORMANCE						
Slew Rate	SR	$R_L = 10 \text{ k}\Omega$		2.5		V/ μ s
Gain Bandwidth Product	GBP			10		MHz
NOISE PERFORMANCE						
Voltage Noise	$e_{n,p-p}$	0.1 Hz to 10 Hz		0.1		$\mu\text{V p-p}$
Voltage Noise Density	e_n	f = 1 kHz		2.8		nV/ $\sqrt{\text{Hz}}$
Current Noise Density	i_n	f = 10 Hz		0.3		pA/ $\sqrt{\text{Hz}}$

ABSOLUTE MAXIMUM RATINGS

Table 4.

Parameter	Rating
Supply Voltage	$\pm 18\text{V}$
Input Voltage	$\pm V_{\text{supply}}$
Input Current	$\pm 5\text{ mA}$
Differential Input Voltage	$\pm 0.7\text{ V}$
Output Short-Circuit Duration to GND	Indefinite
Storage Temperature Range RM-8, R-8 Packages	-65°C to $+150^{\circ}\text{C}$
Operating Temperature Range	-40°C to $+125^{\circ}\text{C}$
Junction Temperature Range RM-8, R-8 Packages	-65°C to $+150^{\circ}\text{C}$
Lead Temperature Range (Soldering, 10 sec)	300°C
NULL Pins (Pin 1, Pin 8), Input Current Maximum	$<50\text{ }\mu\text{A}, V_s < V_+$

Stresses above those listed under Absolute Maximum Ratings may cause permanent damage to the device. This is a stress rating only; functional operation of the device at these or any other conditions above those indicated in the operational section of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

THERMAL RESISTANCE

θ_{JA} is specified for the worst-case conditions, that is, a device soldered in a circuit board for surface-mount packages and measured using a standard 4-layer board, unless otherwise specified.

Table 5. Thermal Resistance

Package Type	θ_{JA}	θ_{JC}	Unit
8-Lead MSOP (RM-8)	142	45	$^{\circ}\text{C/W}$
8-Lead SOIC_N (R-8)	120	45	$^{\circ}\text{C/W}$

POWER SEQUENCING

Establish the op amp supplies simultaneously with, or before, any input signals are applied. If this is not possible, the input current must be limited to 10 mA.

ESD CAUTION



ESD (electrostatic discharge) sensitive device. Charged devices and circuit boards can discharge without detection. Although this product features patented or proprietary protection circuitry, damage may occur on devices subjected to high energy ESD. Therefore, proper ESD precautions should be taken to avoid performance degradation or loss of functionality.

TYPICAL PERFORMANCE CHARACTERISTICS

$\pm 15 \text{ V}$ and $\pm 5 \text{ V}$, $T_A = 25^\circ\text{C}$, unless otherwise specified.

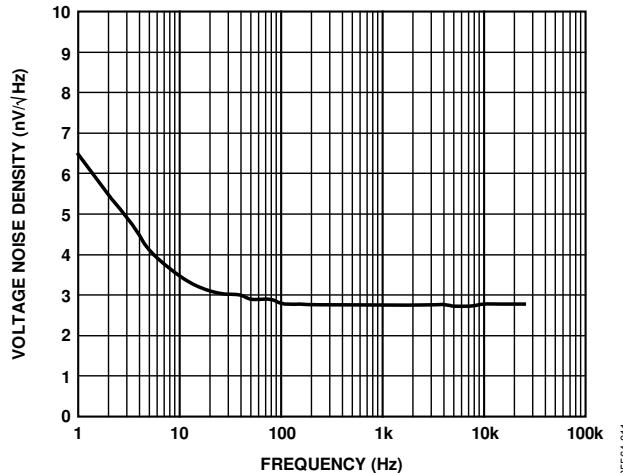


Figure 3. Voltage Noise Density vs. Frequency

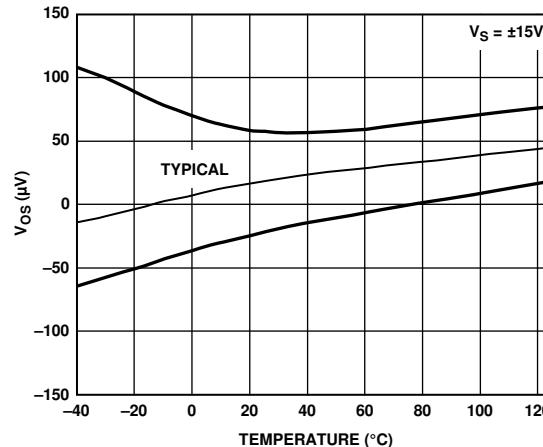


Figure 6. Offset Voltage vs. Temperature

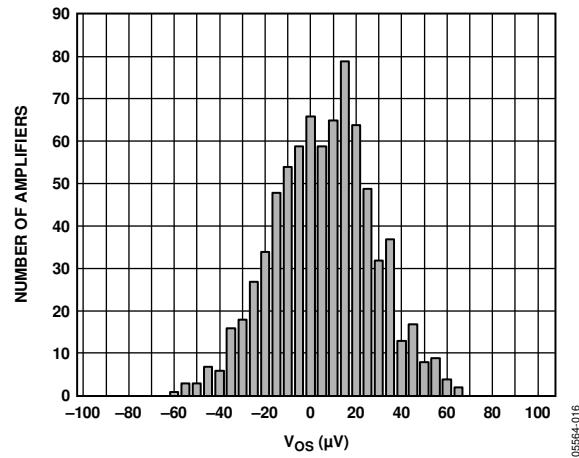


Figure 4. Input Offset Voltage Distribution

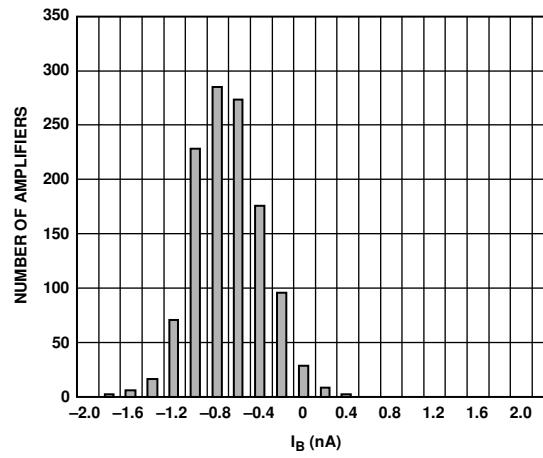


Figure 7. Input Bias Current, $V_S = \pm 15 \text{ V}$

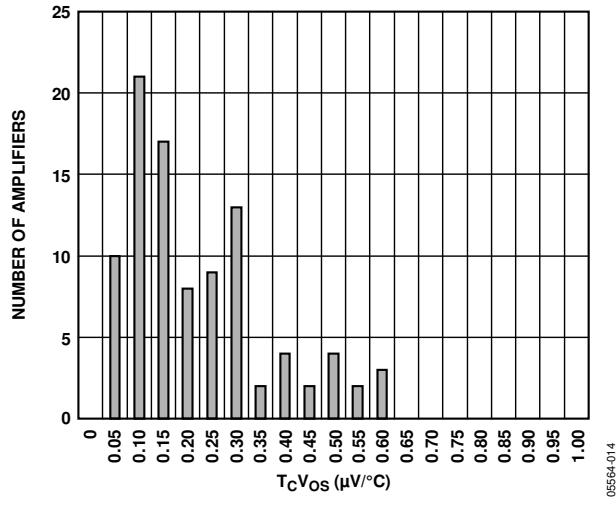


Figure 5. $T_c V_{os}$



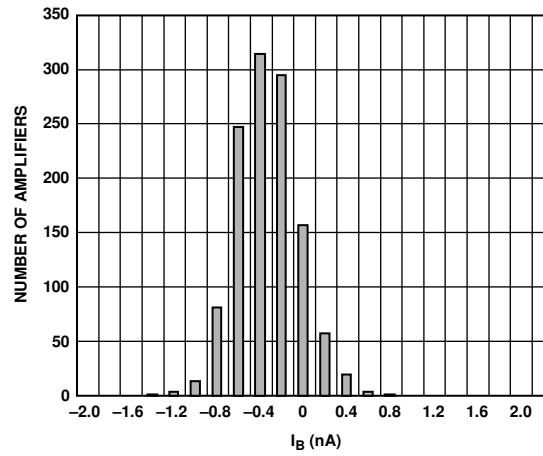



Figure 8. Input Bias Current, $V_S = \pm 5 \text{ V}$

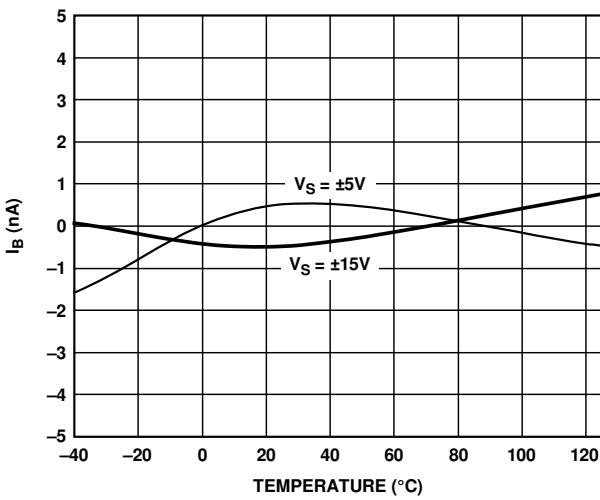


05564-0107

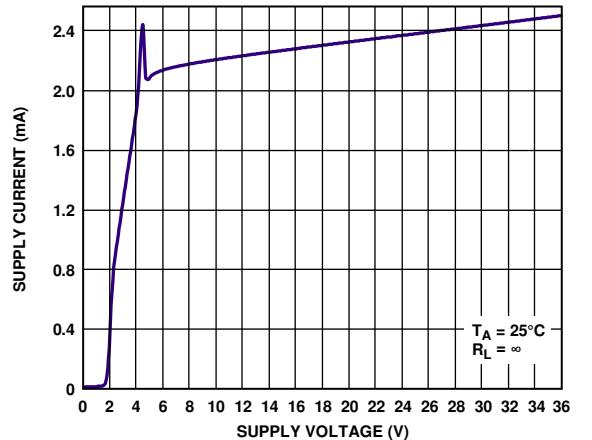


05564-0109

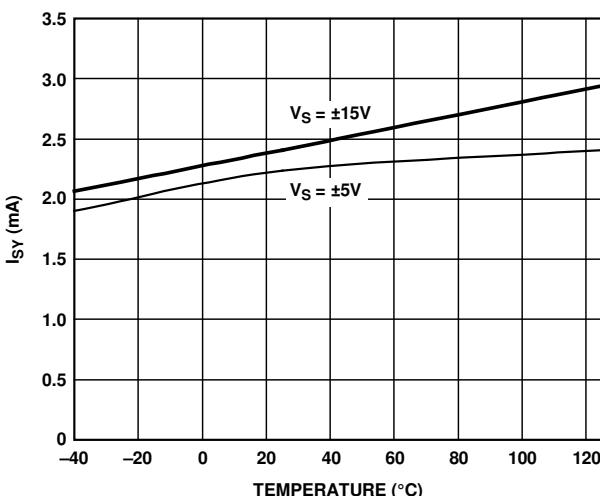


05564-0119

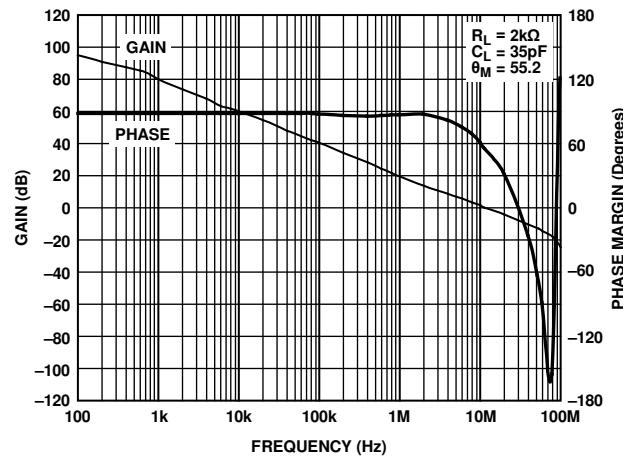

05564-0118

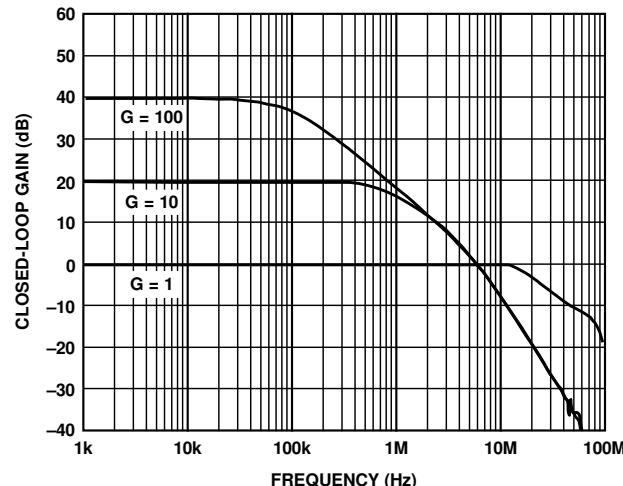

05564-0130

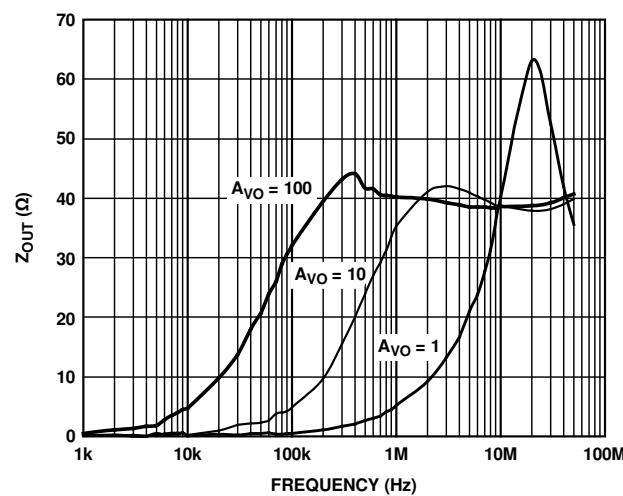

05564-0115

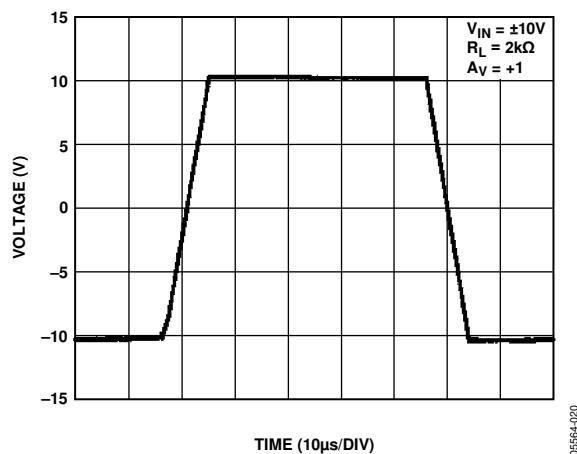
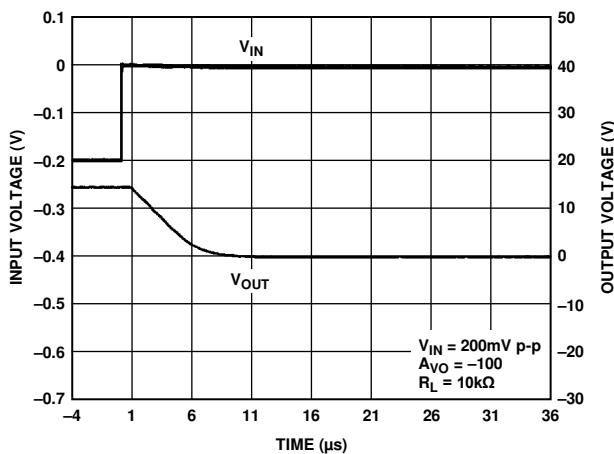
Figure 15. Large-Signal Transient Response, $V_{SY} = \pm 15\text{ V}$ 

Figure 18. Positive Overvoltage Recovery

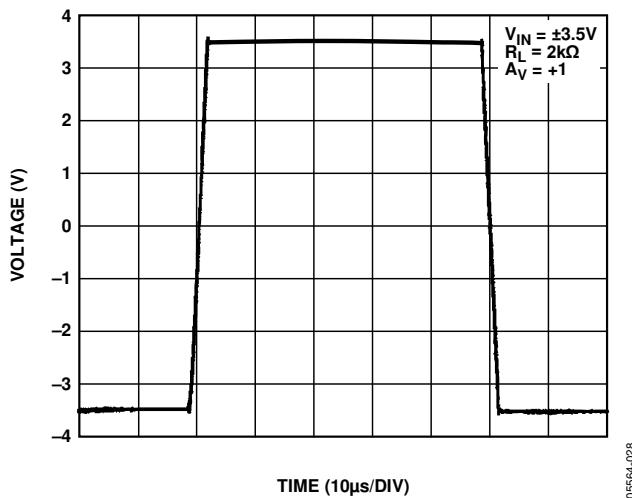
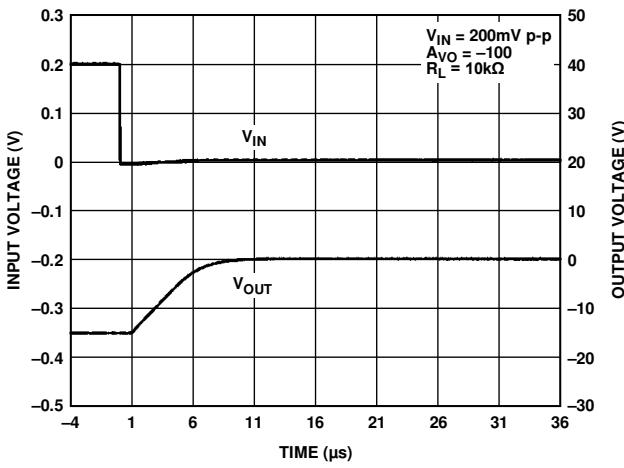
Figure 16. Large-Signal Transient Response, $V_{SY} = \pm 5\text{ V}$ 

Figure 19. Negative Overvoltage Recovery

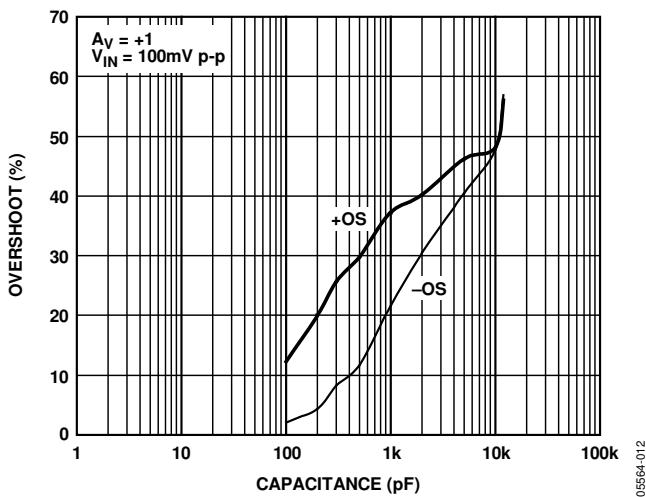


Figure 17. Small-Signal Overshoot vs. Load Capacitance

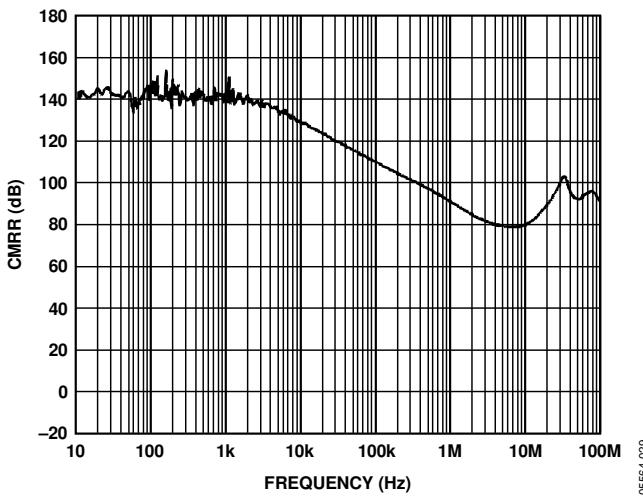
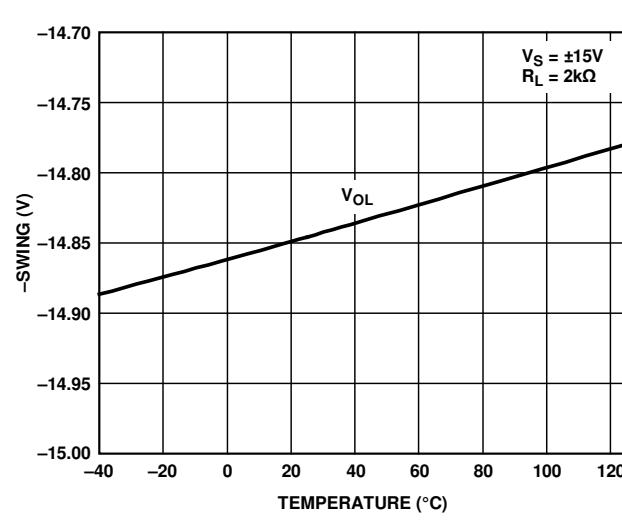
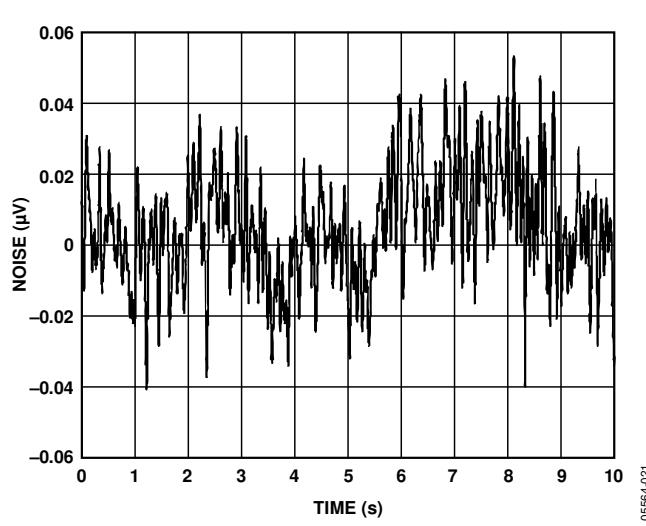
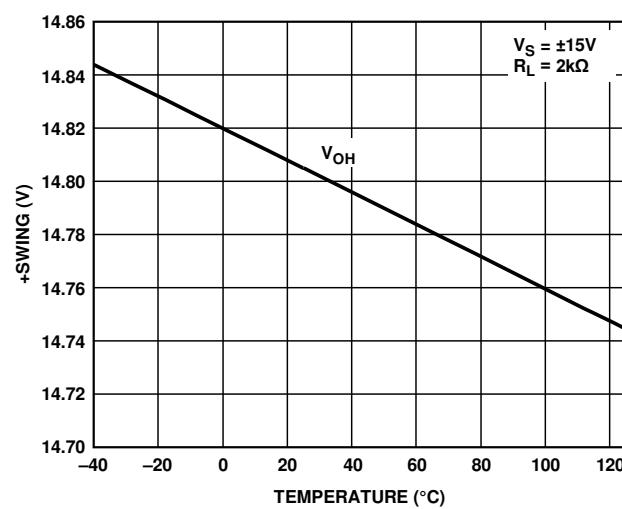
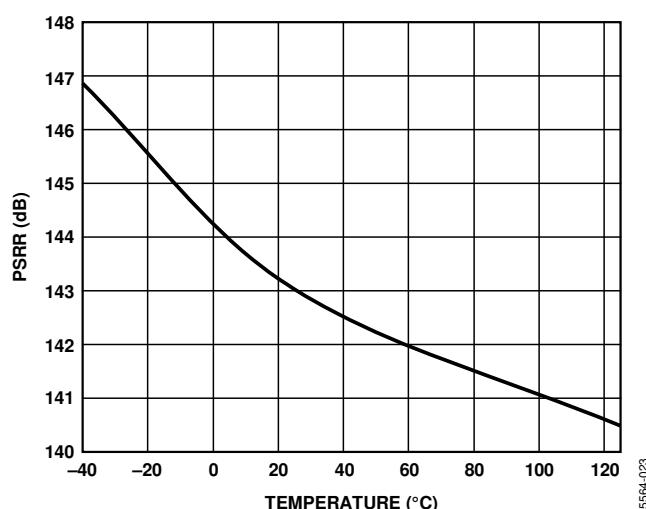
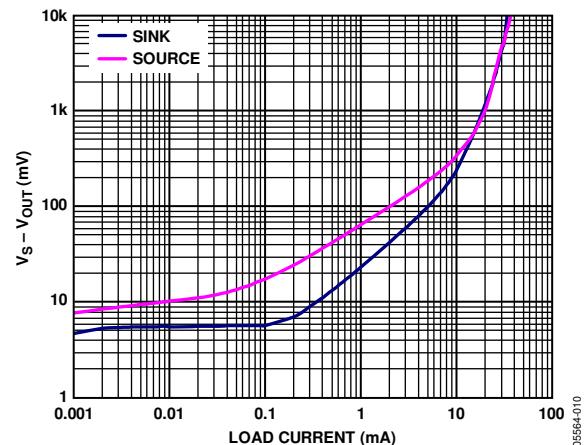
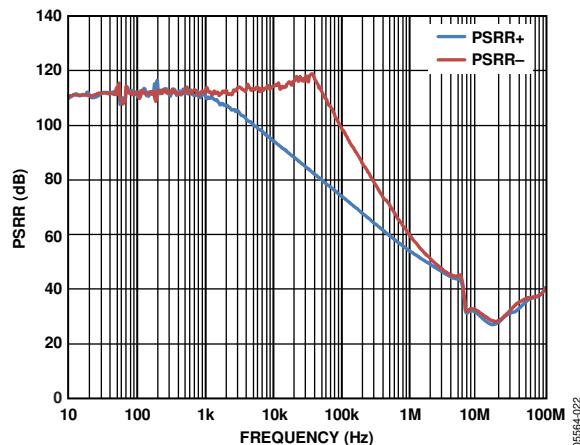


Figure 20. CMRR vs. Frequency



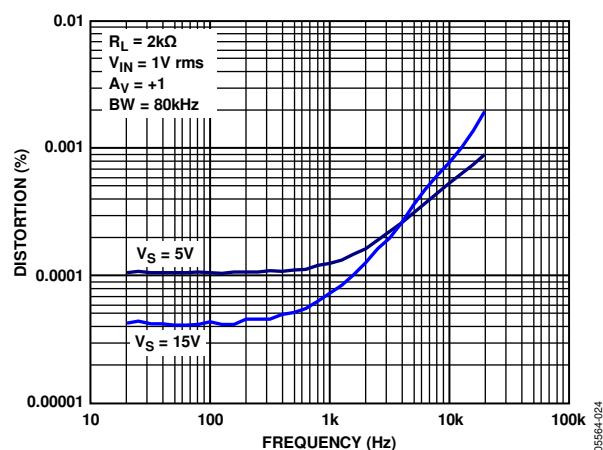


Figure 27. Distortion vs. Frequency

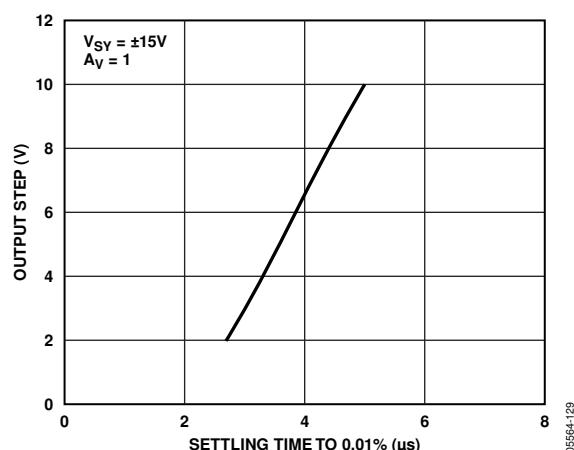


Figure 29. Output Step vs. Settling Time to 0.01%

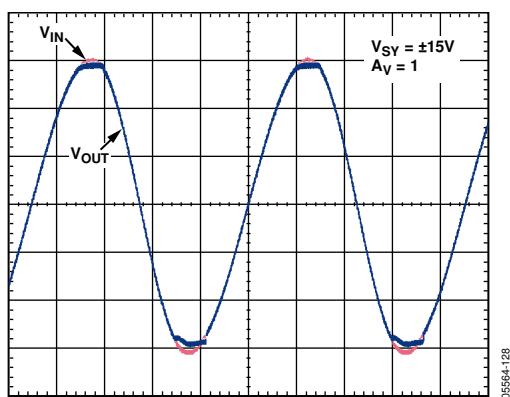


Figure 28. No Phase Reversal

TEST CIRCUIT


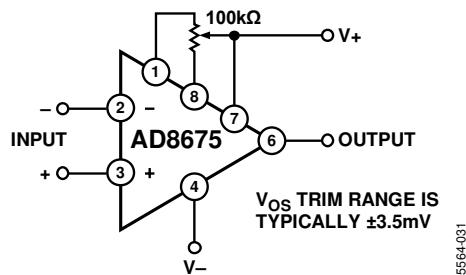


Figure 30. Optional Offset Nulling Circuit


OUTLINE DIMENSIONS

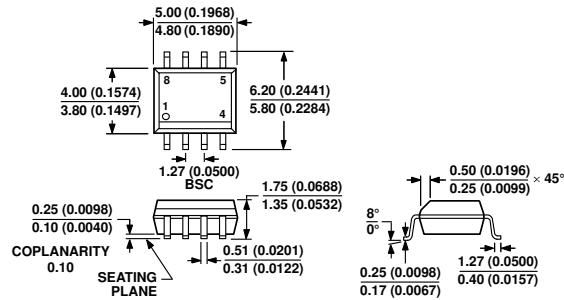

COMPLIANT TO JEDEC STANDARDS MS-012-AA
 CONTROLLING DIMENSIONS ARE IN MILLIMETERS; INCH DIMENSIONS
 (IN PARENTHESES) ARE ROUNDED-OFF MILLIMETER EQUIVALENTS FOR
 REFERENCE ONLY AND ARE NOT APPROPRIATE FOR USE IN DESIGN.

012407-A

Figure 31. 8-Lead Standard Small Outline Package [SOIC_N]
 Narrow Body (R-8)
 Dimensions shown in millimeters and (inches)

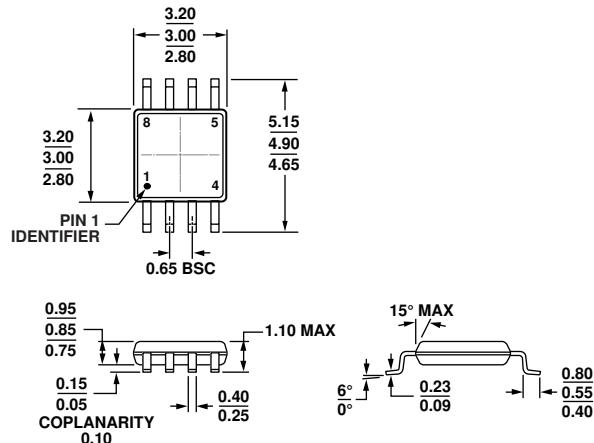

10-07-2009-B

COMPLIANT TO JEDEC STANDARDS MO-187-AA
 Figure 32. 8-Lead Mini Small Outline Package [MSOP]
 (RM-8)
 Dimensions shown in millimeters

ORDERING GUIDE

Model ¹	Temperature Range	Package Description	Package Option	Branding
AD8675ARMZ	-40°C to +125°C	8-Lead Mini Small Outline Package [MSOP]	RM-8	A08
AD8675ARMZ-REEL	-40°C to +125°C	8-Lead Mini Small Outline Package [MSOP]	RM-8	A08
AD8675ARZ	-40°C to +125°C	8-Lead Standard Small Outline Package [SOIC_N]	R-8	
AD8675ARZ-REEL	-40°C to +125°C	8-Lead Standard Small Outline Package [SOIC_N]	R-8	
AD8675ARZ-REEL7	-40°C to +125°C	8-Lead Standard Small Outline Package [SOIC_N]	R-8	

¹Z = RoHS Compliant Part.