



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



### GENERAL DESCRIPTION

The ADXL203EB is a simple evaluation board that allows quick evaluation of the performance of the ADXL203 dual axis  $\pm 1.7 g$  accelerometer. The ADXL203EB has a 5-pin 0.1 inch spaced header for access to all power and signal lines that the user can attach to a prototyping board (breadboard) or wire using a standard plug. Four holes are provided for mechanical attachment of the ADXL203EB to the application.

The ADXL203EB is 20 mm  $\times$  20 mm, with mounting holes set 15 mm  $\times$  15 mm at the corners of the PCB.

### CIRCUIT DESCRIPTION

The schematic and parts list of the ADXL203EB are shown in Figure 1. Analog bandwidth can be set by changing capacitors C2 and C3. See the ADXL203 data sheet for a complete description of the operation of the accelerometer.

The part layout of the ADXL203EB is shown in Figure 2. The ADXL203EB has two factory-installed 100 nF capacitors (C2 and C3) at X<sub>OUT</sub> and Y<sub>OUT</sub> to reduce the bandwidth to 50 Hz. Many applications require a different bandwidth, in which case the user can change C2 and C3, as appropriate.

### SPECIAL NOTES ON HANDLING

The ADXL203EB is not reverse polarity protected. Reversing the +V supply and ground pins can cause damage to the ADXL203.

Dropping the ADXL203EB on a hard surface can generate several thousand *g* of acceleration and might exceed the data sheet absolute maximum limits. See the ADXL203 data sheet for more information.

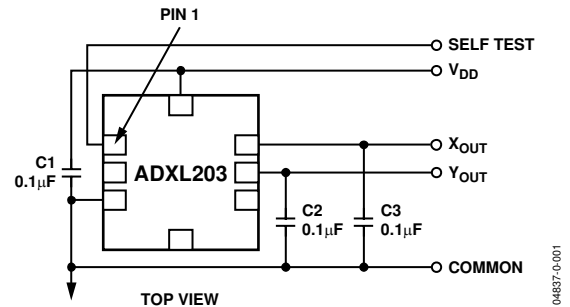


Figure 1. ADXL203EB Schematic

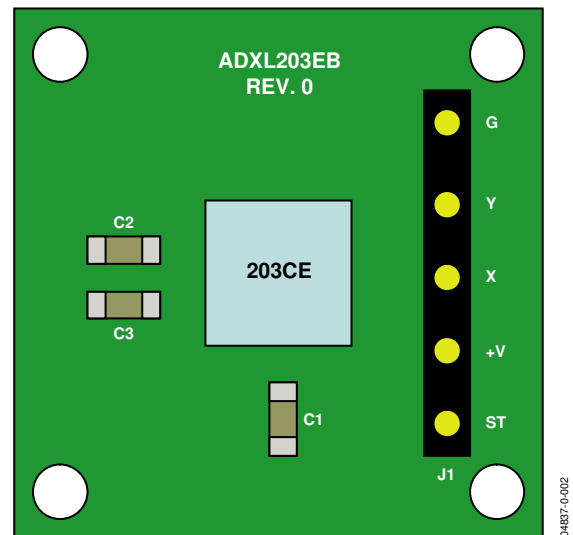


Figure 2. ADXL203EB Physical Layout

### ORDERING GUIDE

Model	Package Description
ADXL203EB	Evaluation Board

#### Rev. 0

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.

**ADXL203EB**