



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





AK9822

2Kbit EEPROM with 2ch 8bit D/A Converter

General Description

The AK9822 includes 2 channel, 8 bit D/A converters with on-chip output buffer amps and it is capable to store the input digital data of each D/A converter by on-chip non-volatile CMOS EEPROM. The AK9822 is optimally designed for various circuit adjustments for consumer and industrial equipments and it is ideally suited for replacing mechanical trimmers.


Feature

- EEPROM section
 - 128 words × 16bit
 - One chip microcomputer interface
 - Sequential register read

- D/A Converter section
 - 2 channel
 - Resolution : 8bit
 - Differential Non-Linearity : ±1.0 LSB
 - Linearity Error : ±1.5 LSB
 - Output Voltage Range : GND ~ VCC

- Wide VCC operation
 - EEPROM section : 1.8V~5.5V
 - D/A Converter Section : 2.7V~5.5V

- Power Down Function

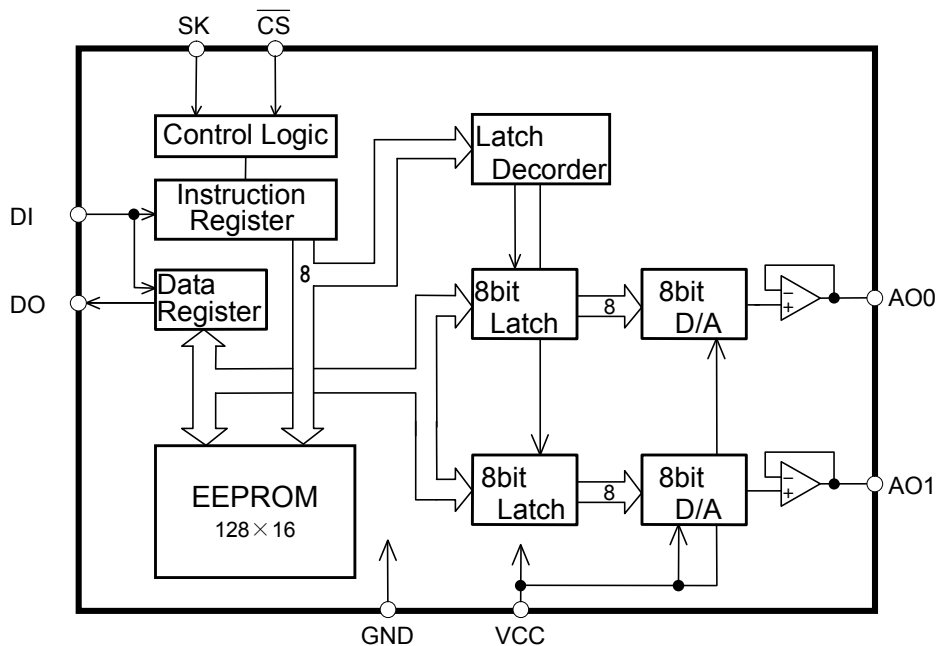

Block Diagram


■ Ordering Guide

AK9822M

-40°C~+85°C

8pin SSOP

■ Pin Layout

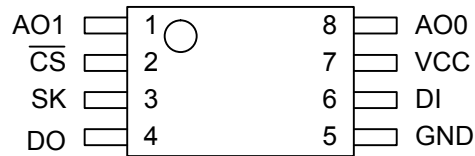

8pin SSOP (Pin pitch : 0.65mm)

■ Pin Description

| No. | Pin Name | I/O | Function |
|-----|------------------------|-----|--|
| 1 | AO1 | O | Analog Output Pin |
| 2 | $\overline{\text{CS}}$ | I | Chip Select Pin (Schmitt-trigger input) |
| 3 | SK | I | Serial Clock Pin (Schmitt-trigger input) |
| 4 | DO | O | Serial Data Output Pin |
| 5 | GND | — | Ground Pin |
| 6 | DI | I | Serial Data Input Pin |
| 7 | VCC | — | Power Supply |
| 8 | AO0 | O | Analog Output Pin |

| |
|------------------------|
| Functional Description |
|------------------------|

The AK9822 is composed of EEPROM and the 8bit D/A converter of two channels with the output buffer amplifier.

The AK9822 can connect to the serial communication port of popular one chip microcomputer directly (3 line negative clock synchronous interface).

The AK9822 takes the data of the DI pin by the rising edge of the SK pin and outputs the data from the DO pin by the falling edge of the SK pin.

The AK9822 has 7 instructions such as READ, WRITE, WREN, WRDS, PDEN, PDDS and CALL. The AK9822 is operated by inputting these instructions from the serial interface. Each instruction is organized by op-code block (8bits), address block (8bits) and data (8bits×2).

The DO pin is "Hi-Z" state except that the DO pin outputs the data of the internal register and the status of Ready/Busy.

■ WRITE protection function

There are two states such as the WRITE enable state and the WRITE disable state in the AK9822. In the WRITE disable state the WRITE instruction becomes invalid and is not executed.

When Vcc is applied to the part, the part powers up in the WRITE disable state and the part becomes the WRITE enable state by inputting the WREN instruction. The WRITE enable state continues until the WRDS instruction is executed or Vcc is removed from the part.

Execution of a READ instruction is independent of both WREN and WRDS instructions.

■ Power down function

There are two modes such as the power down mode and the normal mode in the AK9822. When the AK9822 is in the power down mode, the D/A converter section is in the standby state. At this time, the outputs of the D/A converters become "Hi-Z".

When Vcc is applied to the part, the AK9822 is in the power down mode. When a AUTO READ function is executed, the part becomes the normal mode. After the AUTO READ function is executed, the mode of the part can be switched by the PDEN and PDDS instructions. The AK9822 becomes the power down mode by inputting the PDEN instruction. The part is in the power down mode until the PDDS instruction is executed. When the PDDS instruction is executed, the part becomes the normal mode.

When returning to the normal mode from the power down mode, the D/A converters output the voltage value set before entering the power down mode. The relation between the D/A converter state and the mode are shown in the table 1.

| Mode | State of D/A converter |
|-----------------|------------------------|
| Power down mode | standby |
| Normal mode | normal |

Table 1. The relation between the state of D/A converter and the mode

■ Output of D/A converter

The output of the D/A converters can be set by the WRITE and the CALL instructions. Upper 8bit data (D15~D8) of the first address of the internal EEPROM (the address "0") corresponds to "A0" of the D/A converter output. Lower 8bit data (D7~D0) of the address "0" corresponds to "A1". The internal composition of EEPROM is shown in the table2.

| Address | D15~D8 | D7~D0 |
|---------|------------------------|----------------|
| 0 | Set data of A0 | Set data of A1 |
| 1 | General purpose memory | |
| ⋮ | ⋮ | |
| 127 | General purpose memory | |

Table2. Internal composition of EEPROM

If the WRITE instruction by which the address "0" is specified is executed at the normal mode, the outputs of the D/A converter of A0 and A1 are set by the specified data.

When the WRITE instruction by which the address "0" is specified is executed at the WRITE enable state and the normal mode, the data is written in the address "0" of EEPROM and the outputs of the D/A converter are set. When the WRITE instruction by which the address "0" is specified is executed at the WRITE disable state and the normal mode, the data is not written in EEPROM and the outputs of the D/A converter are set. Table3 shows the relation between EEPROM, D/A converter and WRITE instruction.

| State of AK9822 | | State of address"0" | Output of A0 and A1 |
|-----------------|---------------|--|---|
| Power down mode | WRITE enable | The data change to the specified data. | The DAC outputs are "Hi-Z". |
| | WRITE disable | The data does not change. | |
| Normal mode | WRITE enable | The data change to the specified data. | The DAC outputs change to the specified data. |
| | WRITE disable | The data does not change. | |

Table3. Relation between EEPROM, D/A converter and WRITE instruction

If the CALL instruction is executed, the outputs of the D/A converter are set by the data of the general purpose memory (the address "1" -"127"). The CALL instruction is composed by the op-code and the address.

When the CALL instruction is executed at the normal mode, the D/A converter output of A0 is set by the upper 8bit data (D15~D8) of the specified address and the output of A1 is set by the lower 8bit data (D7~D0). The CALL instruction is not executed at the power down mode.

■ AUTO READ function


AUTO READ function automatically reads the content of EEPROM and sets the output of the D/A converter of two channels, when Vcc is applied to the part.

When Vcc is applied to the part in \overline{CS} ="L", the AUTO READ function starts by falling \overline{CS} pin first. After the \overline{CS} pin is made a low level, the output of AO0 and AO1 is set within 2ms. At this time, the input pins (SK, DI) other than the \overline{CS} pin are not accepted, and the serial data is not output from the DO pin. If the WREN instruction is executed after the AUTO READ function finished, AK9822 becomes the WRITE enable state.

After Vcc is applied to the part, the AUTO READ function is executed only once.


AUTO READ function is executed when Vcc is applied to the part in \overline{CS} ="L".

(note) Because AK9822 always executes the AUTO READ function first after Vcc is applied to the part, AK9822 is not able to accept the instruction for the first period of "L" of the \overline{CS} .

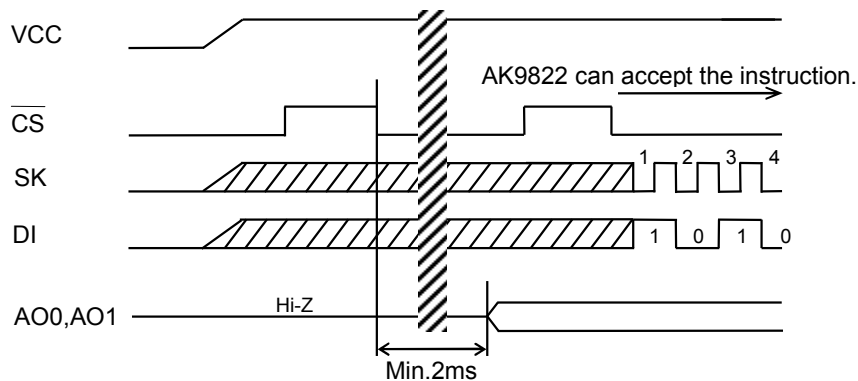

■ Instruction and Composition of the data

Each instruction consist of op-code, address, and data (8bit×2) composed in each 8bit. The composition of the WRITE instruction is shown as follows.

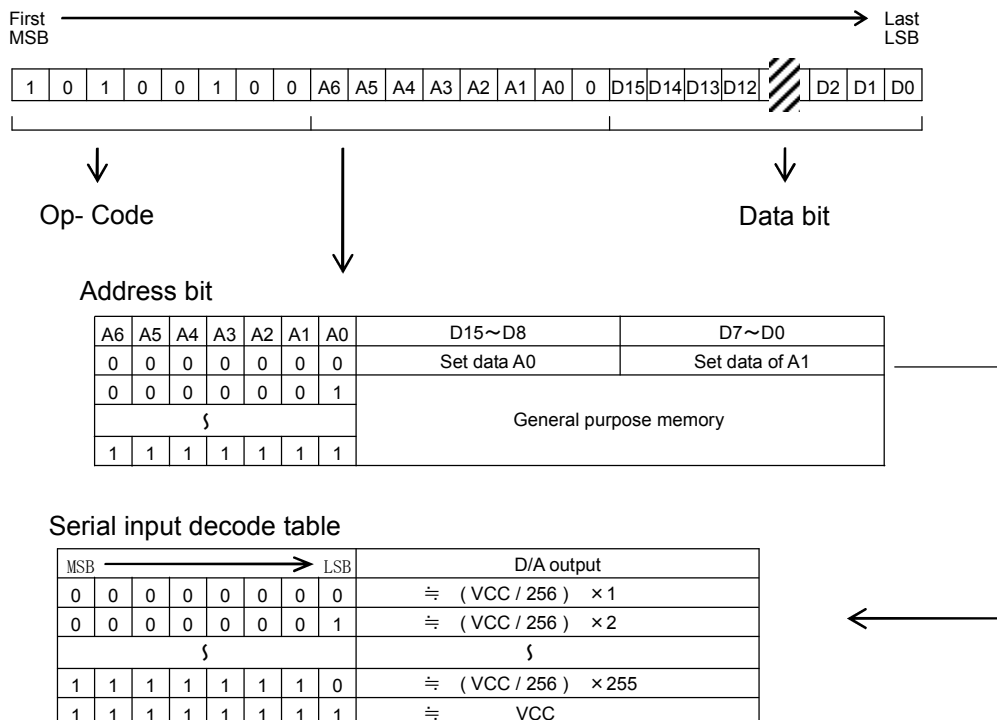

Instruction Set

The AK9822 has 7 instructions such as READ, WRITE, WREN, WRDS, PDEN, PDDS, CALL. Each instruction consists of Op-code, address and data. The instruction set is shown in the table4. When the instructions are executed consecutively, the CS pin should be brought to a high level for a minimum of tCS between consecutive instruction cycle.

| Instruction | Op-code | Address | Data | Comments |
|-------------|-----------------|------------------------|--------|--------------------|
| READ | 1 0 1 0 1 0 0 0 | A6 A5 A4 A3 A2 A1 A0 0 | D15~D0 | read memory |
| WRITE | 1 0 1 0 0 1 0 0 | A6 A5 A4 A3 A2 A1 A0 0 | D15~D0 | write memory |
| WREN | 1 0 1 0 0 0 1 1 | * * * * * * * * | * ~ | write enable |
| WRDS | 1 0 1 0 0 0 0 0 | * * * * * * * * | * ~ | write disable |
| PDEN | 1 0 1 0 1 1 0 0 | * * * * * * * * | * ~ | power down enable |
| PDDS | 1 0 1 0 0 1 1 0 | * * * * * * * * | * ~ | power down disable |
| CALL | 1 0 1 0 0 0 1 0 | A6 A5 A4 A3 A2 A1 A0 0 | * ~ | set DAC outputs |
| TEST | 1 0 1 0 1 1 1 1 | * * * * * * * * | * ~ | TEST (note) |

(note) User can't use this instruction.

* : Don't Care


Table4. Instruction set for AK9822

■ WRITE

The WRITE instruction is followed by 16 bits of data to be written into the specified address. After the 32nd rising edge of SK to read the DI pin in, the AK9822 will be put into the automatic write time-out period.

The DO pin indicates the Ready/Busy status of the EEPROM in the AK9822. After the 32nd rising edge of SK to read the Di pin in, the AK9822 will be put into the automatic write time-out period. When the automatic write time-out period starts, the DO pin outputs the Ready/Busy status. When the DO pin outputs the low level, the AK9822 is in the automatic write time-out and the next instruction can not be accepted. When the DO pin outputs the high level, the automatic write time-out period has ended and the AK9822 is ready for a next instruction.

When the CS pin is changed to high level after confirmation of Ready/Busy signal on the DO pin, the DO pin becomes "Hi-Z". The Ready/Busy signal outputs until the CS pin is changed to high level, or the initial 1 bit ("1") of the next instruction is given to the part.

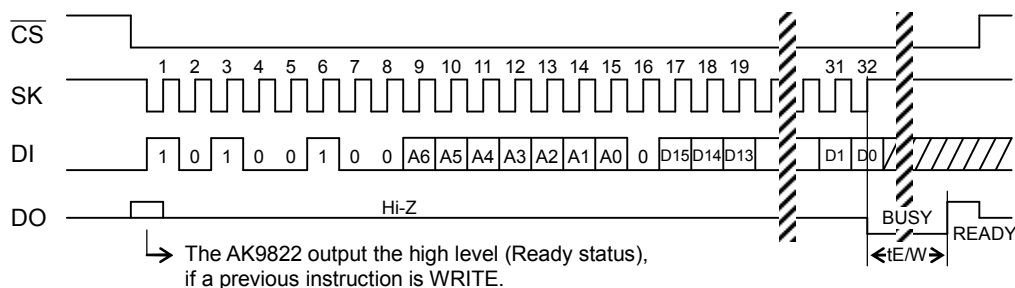

WRITE


■ READ

The READ instruction is the only instruction which outputs serial data on the DO pin. When the 17th falling edge of SK is received, the Do pin will come out of high impedance state and shift out the data from D15 first in descending order which is located at the address specified in the instruction.

○ Sequential READ

When the clock is provided on the SK pin after the data in the specified address is read, the data in the next address is read.

When the clock is provided on the SK pin after the data in the address:1111111 is read, the data in the address:0000000 is read.

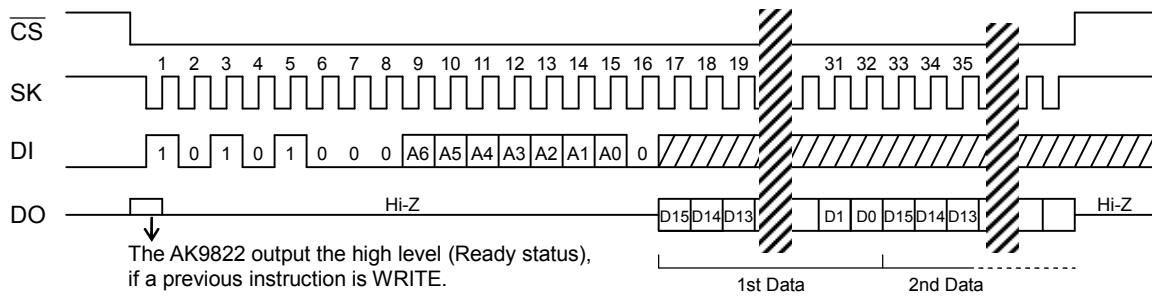


READ

■ WREN/WRDS

There are two states such as the WRITE enable state and the WRITE disable state in the AK9822. In the WRITE disable state the WRITE instruction becomes invalid and is not executed. When Vcc is applied to the part, it powers up in the WRITE disable state. The WRITE instruction must be preceded by a WREN instruction. This state remains enabled until a WRDS instruction is executed or Vcc is removed from the part.

Execution of a read instruction is not affected by both WREN and WRDS instruction.


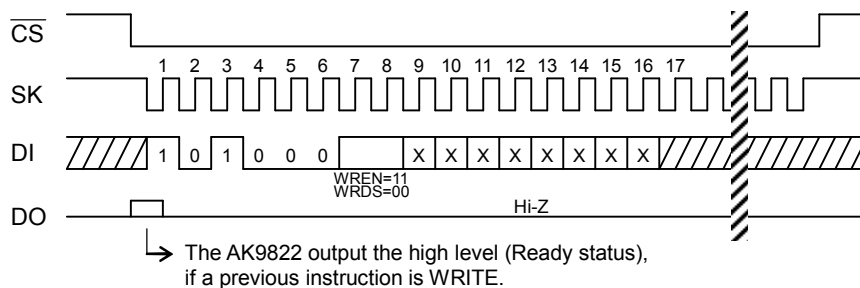


WREN/WRDS

■ PDEN/PDDS

There are two modes such as the power down mode and the normal mode in the AK9822. The mode of the part can be switched by the PDEN and PDDS instructions. The AK9822 becomes the power down mode by inputting the PDEN instructions. When the PDDS instruction is executed, the part becomes the normal mode.


When returning to the normal mode from the power down mode, the D/A converters output the voltage value set before entering the power down mode.

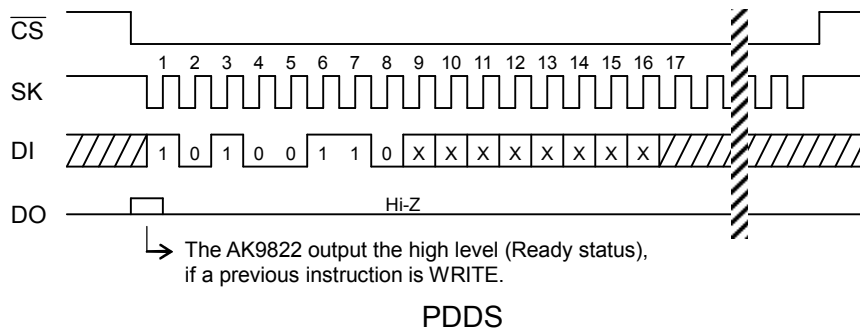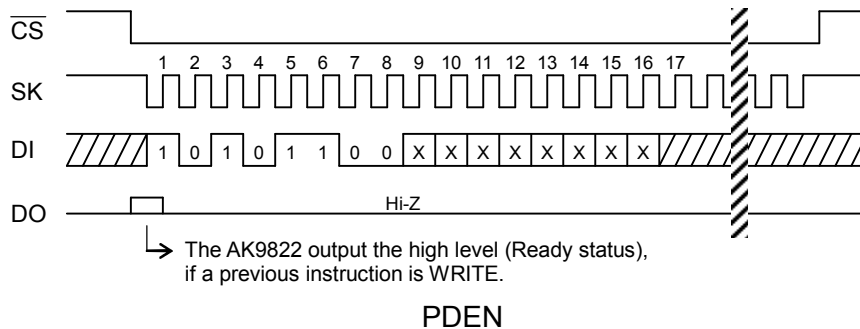

■ CALL

The outputs of the D/A converters is set by inputting a CALL instruction. Upper 8bit data (D15~D8) of the specified address corresponds to "A0". Lower 8bit data (D7~D0) of the specified address corresponds to "A1".

The CALL instruction is not executed at the power down mode.

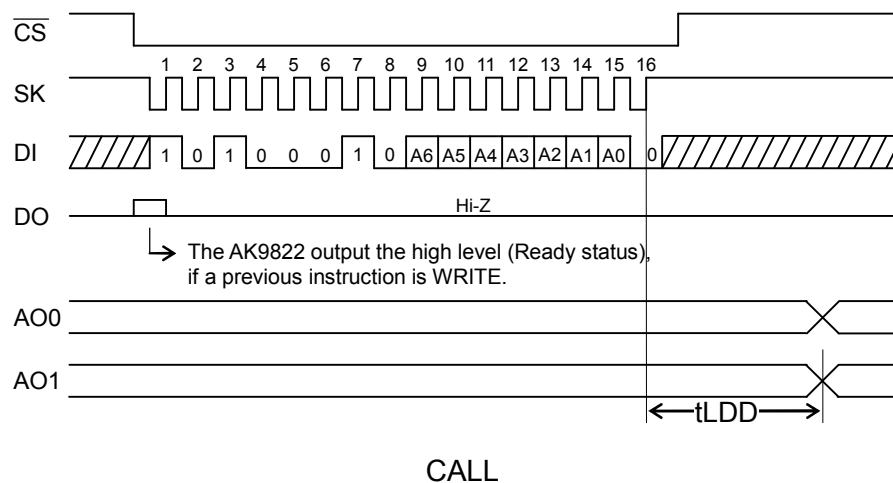

| |
|--------------------------|
| Absolute Maximum Ratings |
|--------------------------|

| Parameter | Symbol | Conditions | Spec. | Units |
|---------------------|--------|-----------------|--------------|-------|
| Power supply | VCC | Relative to GND | -0.6~+7.0 | V |
| Input voltage | VIO | Relative to GND | -0.6~VCC+0.6 | V |
| Ambient temperature | Ta | | -40~+85 | °C |
| Storage temperature | TST | | -65~+150 | °C |

| |
|----------------------------------|
| Recommended Operating conditions |
|----------------------------------|

| Parameter | Symbol | Conditions | min | typ | max | Units |
|--------------------------------|--------|---------------------------|-----|-----|-----|-------|
| Power supply | VCC1 | DAC operation | 2.7 | | 5.5 | V |
| | VCC2 | EEPROM operation | 1.8 | | 5.5 | V |
| Analog output source current1 | IAL1 | $3.6V \leq VCC \leq 5.5V$ | | | 1 | mA |
| Analog output sink current1 | IAH1 | | | | 1 | mA |
| Analog output source current2 | IAL2 | $2.7V \leq VCC < 3.6V$ | | | 500 | μA |
| Analog output sink current2 | IAH2 | | | | 500 | μA |
| Analog output load capacitance | AOC | | | | 1.0 | μF |

| |
|----------------------------|
| Electrical characteristics |
|----------------------------|

■ DC characteristics

(VCC=+1.8V~5.5V, GND=0V, Ta=-40~+85°C unless otherwise specified)

| Parameter | Symbol | Conditions | min | max | Units |
|--|--------|--------------------------------------|-----------|-----------|-------|
| Operating power consumption (note1) | IDD1 | Normal mode WRITE, 1/tSKP=2MHz | | 5.5 | mA |
| | IDD2 | Normal mode READ, 1/tSKP=2MHz | | 2.3 | mA |
| | IDD3 | Power down mode READ, 1/tSKP=2MHz | | 0.75 | mA |
| Standby power consumption (note2) | IDD4 | Power down mode standby (CS="H") | | 1.0 | μA |
| Input high voltage CS,SK pin | VIH1 | 2.5V ≤ VCC ≤ 5.5V | 0.8 × VCC | | V |
| | VIH2 | 1.8V ≤ VCC < 2.5V | 0.9 × VCC | | V |
| Input high voltage DI pin | VIH3 | 2.5V ≤ VCC ≤ 5.5V | 0.7 × VCC | | V |
| | VIH4 | 1.8V ≤ VCC < 2.5V | 0.8 × VCC | | V |
| Input low voltage CS,SK pin | VIL1 | 2.5V ≤ VCC ≤ 5.5V | | 0.2 × VCC | V |
| | VIL2 | 1.8V ≤ VCC < 2.5V | | 0.1 × VCC | V |
| Input low voltage DI pin | VIL3 | 2.5V ≤ VCC ≤ 5.5V | | 0.3 × VCC | V |
| | VIL4 | 1.8V ≤ VCC < 2.5V | | 0.2 × VCC | V |
| Output high voltage | VOH1 | (note4), IOH=-50uA | VCC-0.3 | | V |
| | VOH2 | (note5), IOH=-50uA | VCC-0.3 | | V |
| Output low voltage | VOL1 | (note4), IOL=1.0mA | | 0.4 | V |
| | VOL2 | (note5), IOL=0.1mA | | 0.4 | V |
| Input leakage current | ILI | VCC=5.5V, VIN=VCC | | ± 1.0 | μA |
| 3 state leakage current | IOZ | VCC=5.5V, DO=VCC CS="H" | | ± 1.0 | μA |

note1. VCC=5.5V, VIN=VIH/VIL, DO=open

note2. VCC=5.5V, SK/DI=VCC/GND, DO=open

note3. Please refer to the "Power down function" regarding the power down mode.

note4. 2.5V ≤ VCC ≤ 5.5V

note5. 1.8V ≤ VCC < 2.5V

■ AC characteristics

1) EEPROM section

(VCC=+1.8V~5.5V, GND=0V, Ta=-40~+85°C unless otherwise specified)

| Parameter | Symbol | Conditions | min | max | Units |
|---|--------|---------------------------------|-----|-----|-------|
| SK cycle | tSKP1 | (note6),(note7) | 500 | | ns |
| | tSKP2 | (note8) | 1.5 | | μs |
| SK pulse width | tSKW1 | (note6),(note7) | 250 | | ns |
| | tSKW2 | (note8) | 750 | | ns |
| SK pulse high level width (note10) | tSKH1 | (note6) | 250 | | ns |
| | tSKH2 | (note7) | 500 | | ns |
| | tSKH3 | (note8) | 750 | | ns |
| CS setup time | tCSS | | 100 | | ns |
| CS hold time | tCSH1 | READ, WREN,WRDS PDEN,PDDS | 100 | | ns |
| | tCSH2 | CALL, WRITE (note9) | 2 | | μs |
| SK setup time | tSKS | | 100 | | ns |
| Data setup time | tDIS1 | (note6) | 100 | | ns |
| | tDIS2 | (note7) | 150 | | ns |
| | tDIS3 | (note8) | 200 | | ns |
| data hold time | tDIH1 | (note6) | 100 | | ns |
| | tDIH2 | (note7) | 150 | | ns |
| | tDIH3 | (note8) | 200 | | ns |
| DO pin output delay (note11), (note13) | tPD1 | (note6) | | 150 | ns |
| | tPD2 | (note7) | | 250 | ns |
| | tPD3 | (note8) | | 500 | ns |
| Selftimed program time | tE/W | | | 10 | ms |
| Write recovery time | tRC | | 100 | | ns |
| Min. CS high time (note12) | tCS | | 250 | | ns |
| DO pin high-Z time | tOZ | | | 500 | ns |

note6. $4.0V \leq VCC \leq 5.5V$

note7. $2.5V \leq VCC < 4.0V$

note8. $1.8V \leq VCC < 2.5V$

note9. In case of the following case, tCSH is min.100ns.

- The WRITE instruction by which the address "0" is specified is executed at the WRITE enable state.
- The WRITE instruction by which the address "1~127" is specified is executed.

note10. The tSKH is the high pulse width of 16th SK pulse in READ operation. When the data in the next address are read sequentially by continuing to provide clock, tSKH are applied to the high pulse width of 32nd and 48th (multiple of 16) SK pulse in READ operation.

note11. In case that Ready/Busy signal output, tPD is min.1μs.

note12. The first CS high time is the tACS after Vcc is applied to the part.

note13. CL=100pF

2) D/A converter section


(2.7V ≤ VCC ≤ 5.5V, GND=0V, Ta=-40~+85°C unless otherwise specified)

| Parameter | Symbol | Conditions | min | typ | max | Units |
|--|--------|--------------------|------|-----|---------|-------|
| Resolution | | Monotonic | | | 8 | bit |
| Differential non-linearity | DNL | AO=OPEN | -1.0 | 0 | +1.0 | LSB |
| linearity error (note14) | NL | 0.1 ≤ AO ≤ VCC-0.1 | -1.5 | 0 | +1.5 | LSB |
| Buffer amp output voltage range 3.6V ≤ VCC ≤ 5.5V | VAO1 | IAO = 0μA | 0.1 | | VCC-0.1 | V |
| | VAO2 | IAO ≤ 1mA | 0.3 | | VCC-0.3 | V |
| Buffer amp output voltage range 2.7V ≤ VCC < 3.6V | VAO3 | IAO = 0μA | 0.1 | | VCC-0.1 | V |
| | VAO4 | IAO ≤ 500μA | 0.3 | | VCC-0.3 | V |
| CS setup time when VCC is applied to the part | tCSA | | 5.0 | | | μs |
| CS hold time in AUTOREAD | tACS | | 5.0 | | | μs |
| DAC setting time (note15) | tLDD1 | 3.6V ≤ VCC ≤ 5.5V | | 100 | 200 | μs |
| | tLDD2 | 2.7V ≤ VCC < 3.6V | | | 400 | μs |


note14. Integral non-linearity is the error between the actual line and the ideal line. The ideal line exhibits a perfect linear D/A converter output characteristics between the input digital data "00" and the input digital data "FF".

note15. CL=100pF


■ Timing waveform

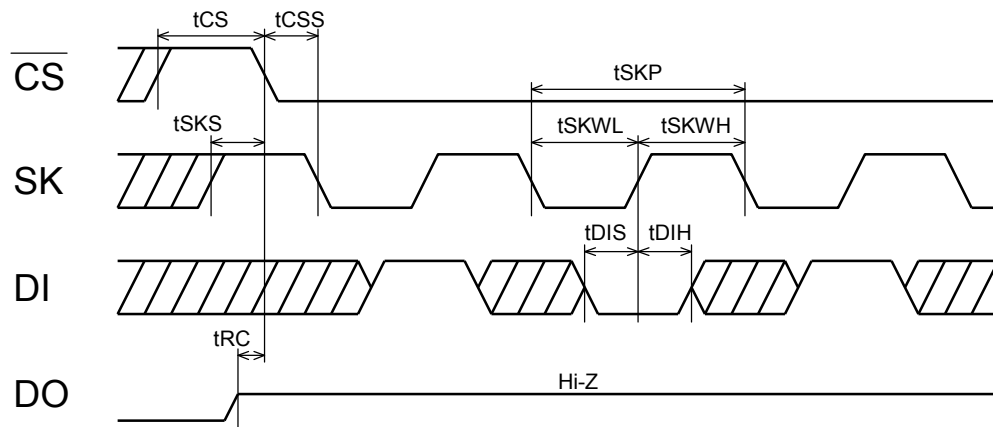


Instruction input timing

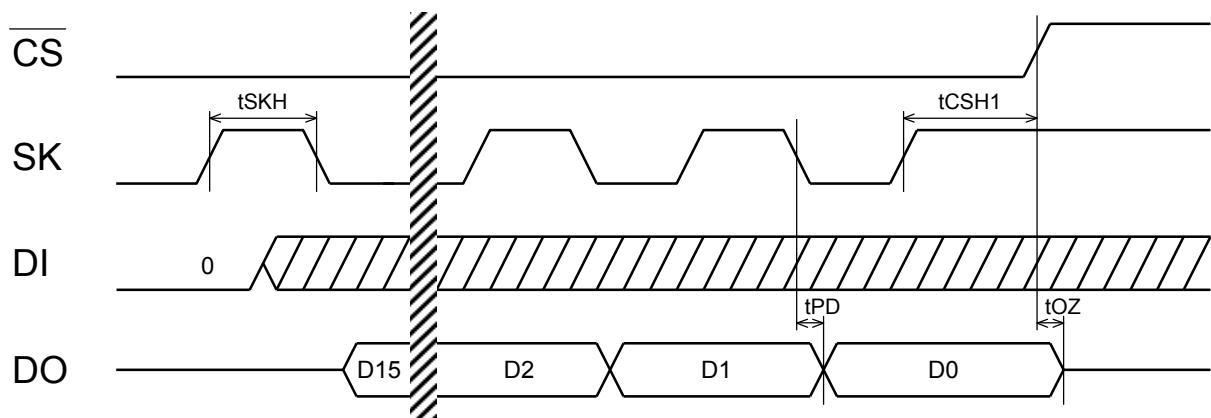


Data latch timing in READ operation

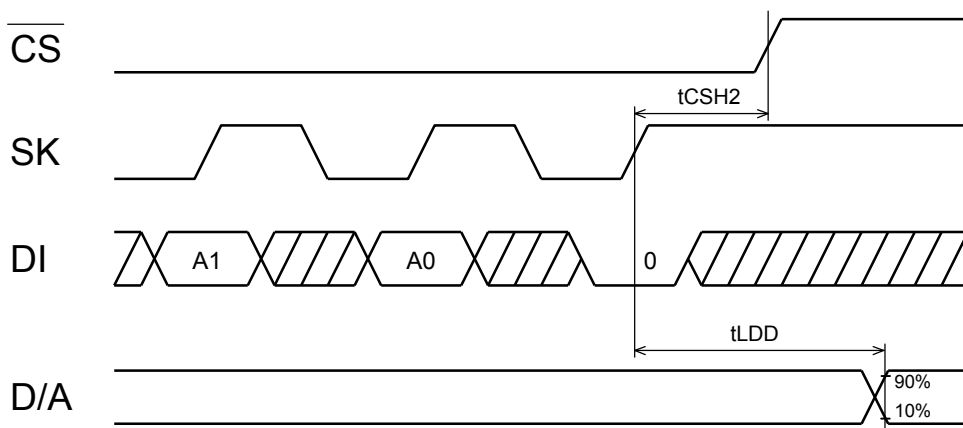

D/A converter output timing in CALL instruction

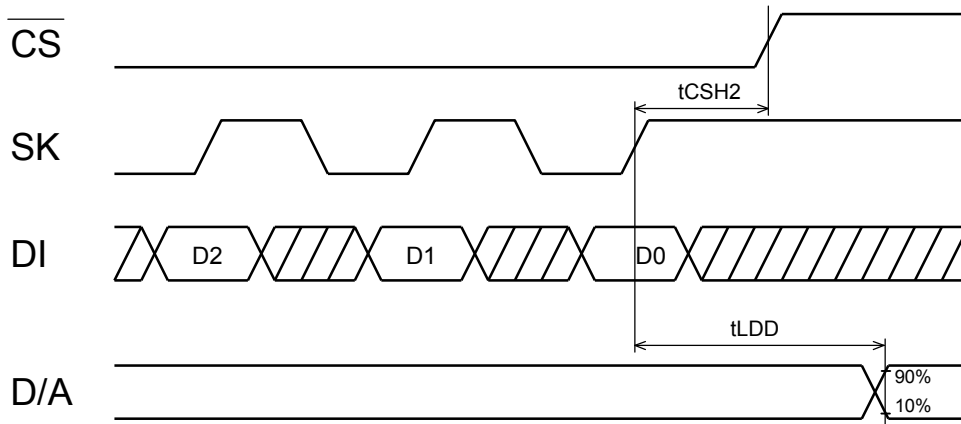


Programming timing in WRITE instruction

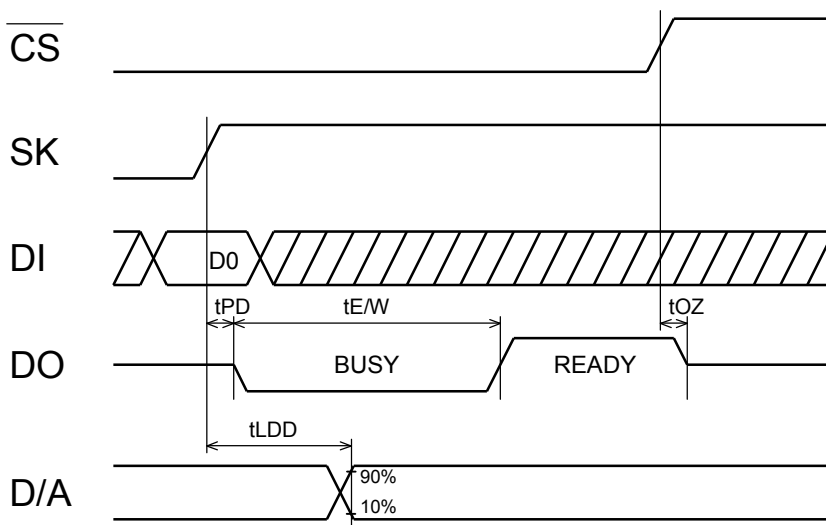

$READY/\overline{BUSY}$ signal output timing

note : $READY/\overline{BUSY}$ signal does not output when WRITE instruction is executed in WRITE disable state.

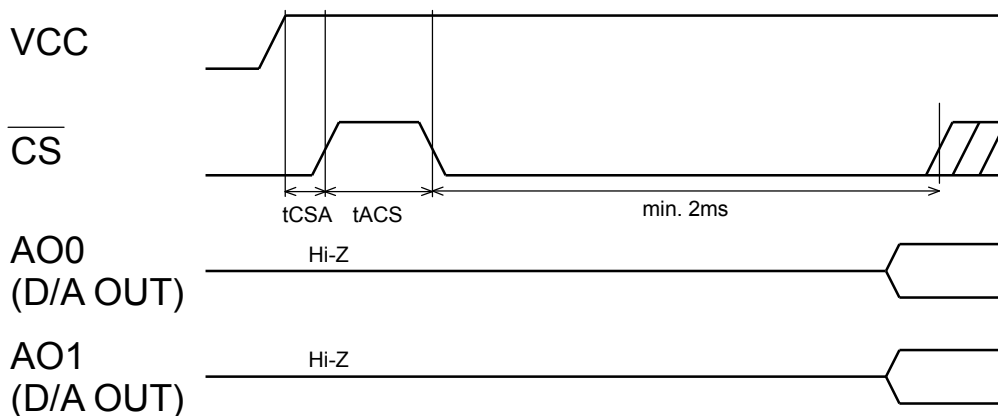

AUTO READ timing

IMPORTANT NOTICE

- These products and their specifications are subject to change without notice.
When you consider any use or application of these products, please make inquiries the sales office of Asahi Kasei Microdevices Corporation (AKM) or authorized distributors as to current status of the products.
- Descriptions of external circuits, application circuits, software and other related information contained in this document are provided only to illustrate the operation and application examples of the semiconductor products. You are fully responsible for the incorporation of these external circuits, application circuits, software and other related information in the design of your equipments. AKM assumes no responsibility for any losses incurred by you or third parties arising from the use of these information herein. AKM assumes no liability for infringement of any patent, intellectual property, or other rights in the application or use of such information contained herein.
- Any export of these products, or devices or systems containing them, may require an export license or other official approval under the law and regulations of the country of export pertaining to customs and tariffs, currency exchange, or strategic materials.
- AKM products are neither intended nor authorized for use as critical components^{Note1)} in any safety, life support, or other hazard related device or system^{Note2)}, and AKM assumes no responsibility for such use, except for the use approved with the express written consent by Representative Director of AKM. As used here:
 - Note1) A critical component is one whose failure to function or perform may reasonably be expected to result, whether directly or indirectly, in the loss of the safety or effectiveness of the device or system containing it, and which must therefore meet very high standards of performance and reliability.
 - Note2) A hazard related device or system is one designed or intended for life support or maintenance of safety or for applications in medicine, aerospace, nuclear energy, or other fields, in which its failure to function or perform may reasonably be expected to result in loss of life or in significant injury or damage to person or property.
- It is the responsibility of the buyer or distributor of AKM products, who distributes, disposes of, or otherwise places the product with a third party, to notify such third party in advance of the above content and conditions, and the buyer or distributor agrees to assume any and all responsibility and liability for and hold AKM harmless from any and all claims arising from the use of said product in the absence of such notification.