



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Not Recommended for New Design



AP1515

150KHz, 1.5A PWM Buck DC/DC Converter

■ Features

- Output voltage: 3.3V and adjustable output version
- Adjustable version output voltage range, 1.23V to 18V $\pm$ 4%
- 150KHz $\pm$ 15% fixed switching frequency
- Voltage mode non-synchronous PWM control
- Thermal-shutdown and current-limit protection
- Operating voltage can be up to 22V
- Output load current: 1.5A
- SIP-4L, SOP-8 **Pb-Free** package
- Low power standby mode
- Built-in switching transistor on chip
- Very Low Cost



■ Applications

- Simple High-efficiency step-down regulator
- On-card switching regulators
- Positive to negative converter

■ General Description

The AP1515 series are monolithic IC designed for a step-down DC/DC converter, and own the ability of driving a 1.5A load without additional transistor component. Due to reducing the number of external component, the board space can be saved easily. The external shutdown function can be controlled by logic level and then come into standby mode. The internal compensation makes feedback control have good line and load regulation without external design. Regarding protected function, thermal shutdown is to prevent over temperature operating from damage, and current limit is against over current operating of the output switch. If current limit function occurred and V_{FB} is down to 0.5V below, the switching frequency will be reduced. The AP1515 series operates at a switching frequency of 150KHz thus allowing smaller sized filter components than what would be needed with lower frequency switching regulators. Other features include a guaranteed $\pm$ 4% tolerance on output voltage under specified input voltage and output load conditions, and $\pm$ 15% on the oscillator frequency. The output version included fixed 3.3V and an adjustable type.

■ Pin Assignments

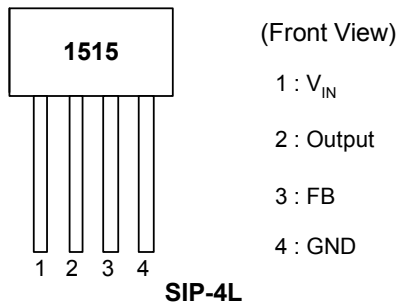

■ Pin Descriptions

Name	Description
V_{IN}	Operating voltage input
Output	Switching output
FB	Output voltage feedback control
SD	ON/OFF Shutdown
GND	Ground


Not Recommended for New Design




AP1515

150KHz, 1.5A PWM Buck DC/DC Converter

■ Ordering Information

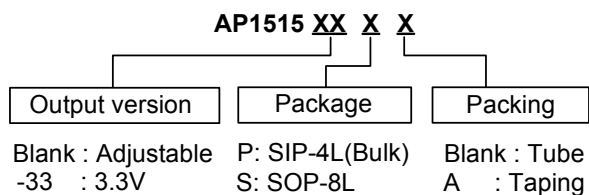

■ Block Diagram

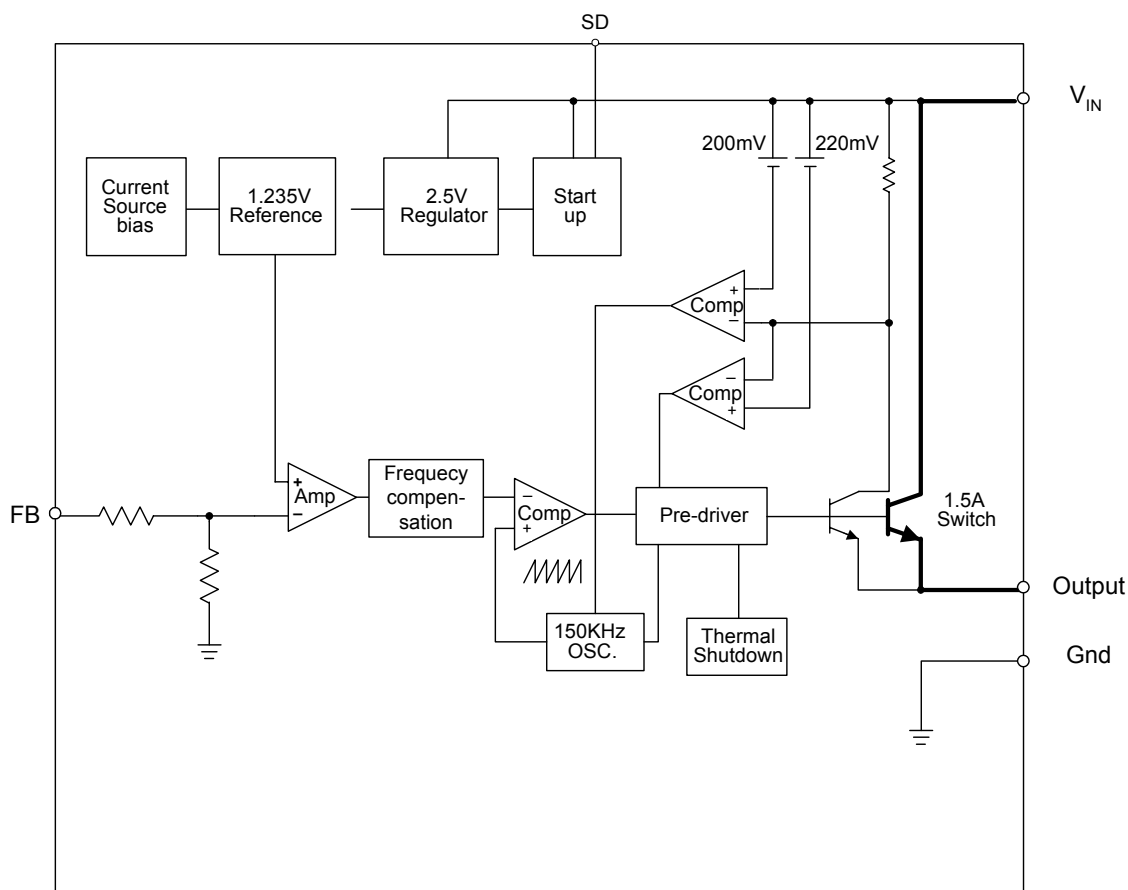

Not Recommended for New Design



AP1515

150KHz, 1.5A PWM Buck DC/DC Converter

■ Absolute Maximum Ratings

Symbol	Parameter	Rating	Unit
V_{CC}	Supply Voltage	+24	V
V_{SD}	ON/OFF Pin input voltage	-0.3 to +18	V
V_{FB}	Feedback Pin voltage	-0.3 to +18	V
V_{OUT}	Output Voltage to Ground	-1	V
P_D	Power Dissipation	Internally limited	W
T_{ST}	Storage temperature	-65 to +150	°C
T_{OP}	Operating temperature	-40 to +125	°C
V_{OP}	Operating voltage	+4.5 to +22	V

■ Electrical Characteristics (All Output Voltage Versions)

Unless otherwise specified, V_{IN} = 12V for 3.3V, 5V, adjustable version and V_{IN} =18V for the 12V version. I_{LOAD} = 0.5A

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
I_{FB}	Feedback bias current	$V_{FB}=1.3V$ (Adjustable version only)	-	-10	-50 -100	nA
F_{OSC}	Oscillator frequency		127 110	150 -	173 173	KHz
F_{SCP}	Oscillator frequency of short circuit protect	When current limit occurred and $V_{FB} < 0.5V$, $T_a=25^\circ C$	10	30	50	KHz
V_{SAT}	Saturation voltage	$I_{OUT}=2A$ No outside circuit $V_{FB}=0V$ force driver on	-	1.25	1.4 1.5	V
DC	Max. Duty Cycle (ON)	$V_{FB}=0V$ force driver on	-	100	-	%
	Min. Duty Cycle (OFF)	$V_{FB}=12V$ force driver off	-	0	-	
I_{CL}	Current limit	Peak current No outside circuit $V_{FB}=0V$ force driver on	SIP-4	2	-	A
			SOP-8	2.5	-	
I_L	Output = 0	Output leakage current No outside circuit $V_{FB}=12V$ force driver off	-	-	-200	uA
	Output = -1	$V_{IN}=22V$	-	-5	-	
I_Q	Quiescent Current	$V_{FB}=12V$ force driver off	-	5	10	mA
I_{STBY}	Standby Quiescent Current	ON/OFF pin=5V $V_{IN}=22V$	-	70	150 200	uA
θ_{JC}	Thermal Resistance	Junction to case	SIP-4	-	30	°C/W
			SOP-8		15	
θ_{JA}	Note 1	Junction to ambient	SIP-4	-	100	°C/W
			SOP-8		70	

Part Number	Symbol	Parameter	Conditions	Typ.	Limit	Unit
AP1515-ADJ	V_{FB}	Output Feedback	$4.5V \leq V_{IN} \leq 22V$ $0.2A \leq I_{LOAD} \leq 1.5A$ V_{OUT} programmed for 3V	1.23	1.193/ 1.18 1.267/ 1.28	V V_{MIN} V_{MAX}
	η	Efficiency	$V_{IN} = 12V$, $I_{LOAD}=1.5A$	78		%
AP1515-3.3V	V_{OUT}	Output voltage	$4.75V \leq V_{IN} \leq 22V$ $0.2A \leq I_{LOAD} \leq 1.5A$	3.3	3.168/ 3.135 3.432/ 3.465	V V_{MIN} V_{MAX}
	η	Efficiency	$V_{IN} = 12V$, $I_{LOAD}=1.5A$	80		%

Specifications with **boldface type** are for full operating temperature range, the other type are for $T_J=25^\circ C$.

Note 1: Pin 4(GND) (< 1 mm length) & direct connect to internal GND layer (for SIP-4 only).

Not Recommended for New Design




AP1515


150KHz, 1.5A PWM Buck DC/DC Converter

■ Typical Application Circuit

(1) Fixed Type Circuit

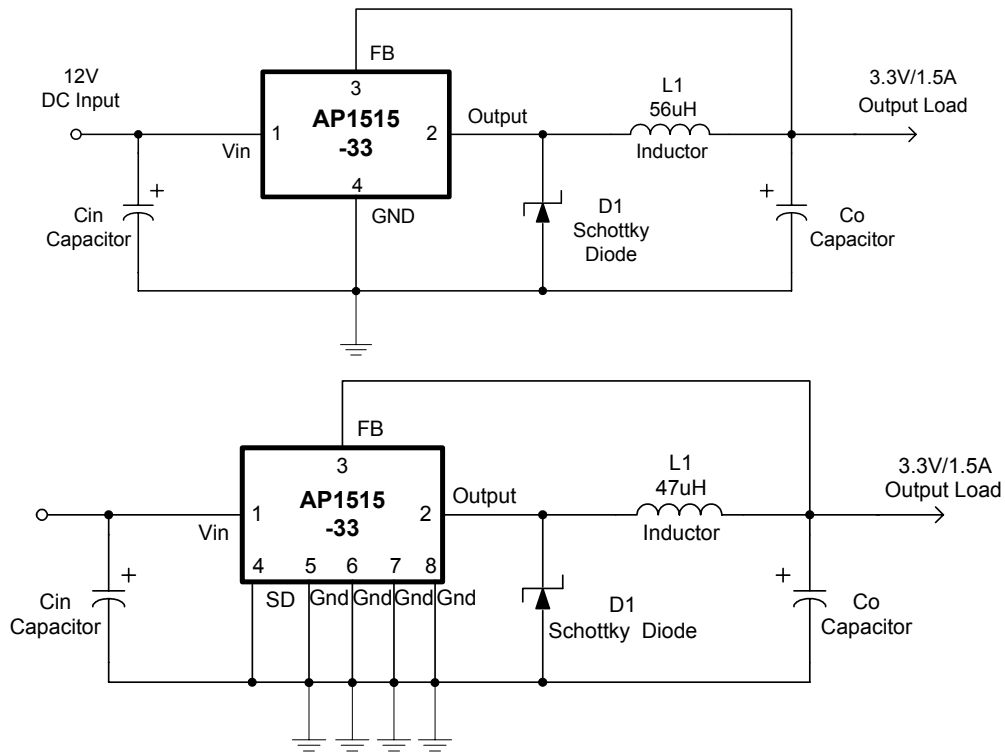

(2) Adjustable Type Circuit

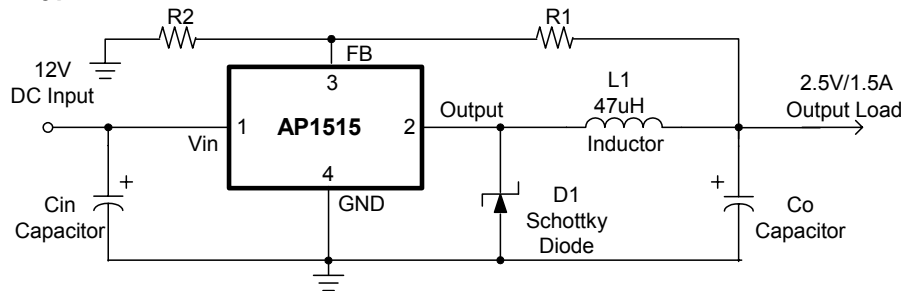

$$V_{out} = V_{FB} \times \left(1 + \frac{R1}{R2}\right)$$

$$V_{FB} = 1.23V$$
$$R2 = 1K \sim 3K$$

Not Recommended for New Design




AP1515

150KHz, 1.5A PWM Buck DC/DC Converter

■ Typical Application Circuit (Continued)

(2) Adjustable Type Circuit

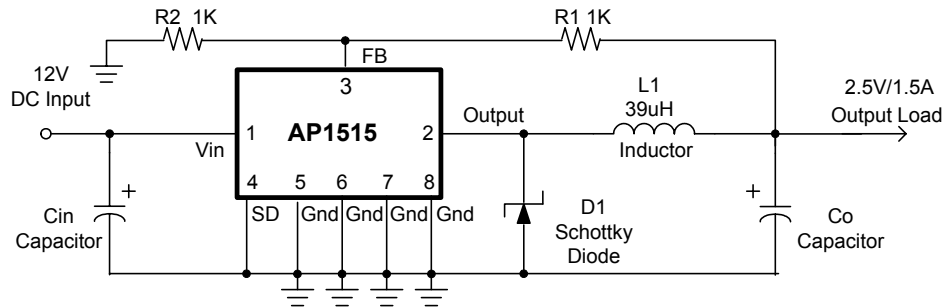


$$V_{out} = V_{FB} \times \left(1 + \frac{R1}{R2}\right)$$


$$V_{FB} = 1.23V$$
$$R2 = 1K \sim 3K$$

■ Typical Performance Characteristics

AP1515 Output Voltage v.s. Temperature
($V_{in}=12V$, $I_o=1.5A$)

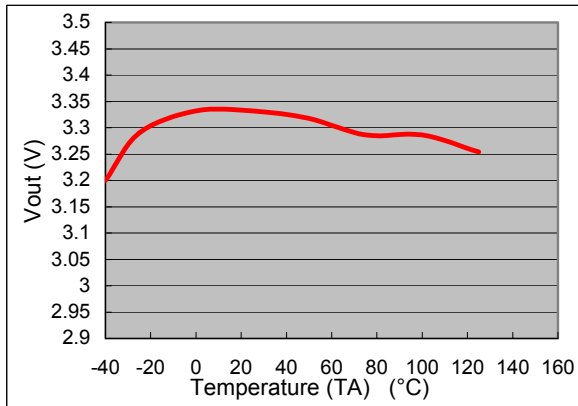

AP1515 Efficiency v.s. Temperature
($V_{in}=12V$, $V_{out}=3.3V$, $I_o=1.5A$)

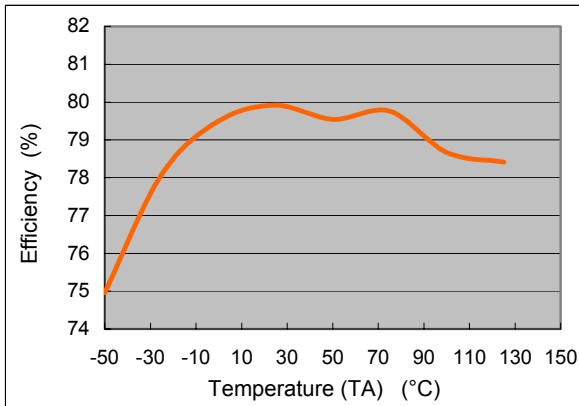

Not Recommended for New Design




AP1515


150KHz, 1.5A PWM Buck DC/DC Converter

■ Typical Performance Characteristics (Continued)



AP1515 Saturation Voltage v.s. Temperature
($V_{cc}=12V, V_{fb}=0V, V_{SD}=0$)

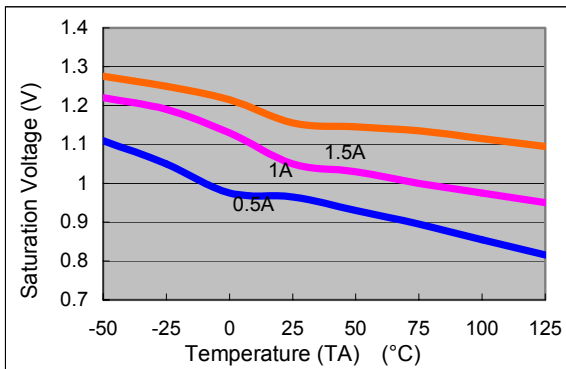


AP1515 Switch Current Limit v.s. Temperature
($V_{cc}=12V, V_{fb}=0V$)

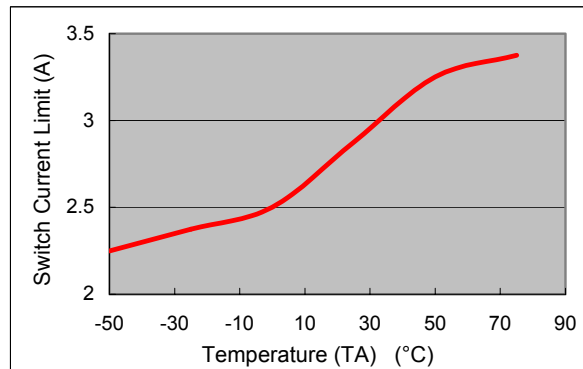


AP1515 Supply Current v.s. Temperature
($V_{cc}=12V$, No Load, $V_{on/off}=0V$ (Switch ON), $V_{on/off}=5V$ (Switch OFF))

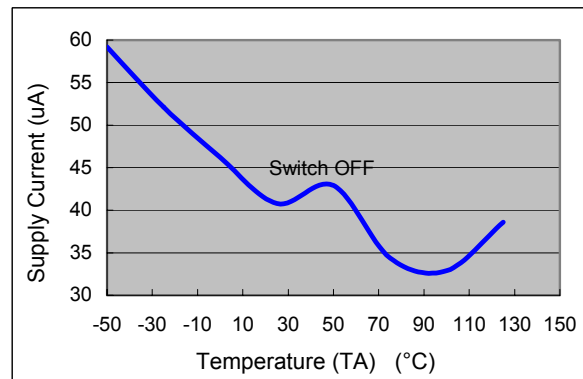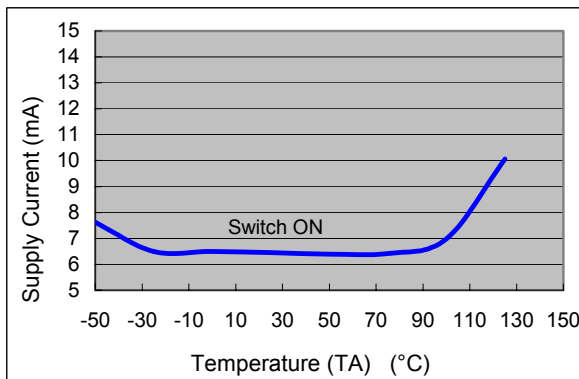

AP1515 Frequency v.s. Temperature
($V_{cc}=12V$, $I_o=500mA$, $V_{out}=5V$)

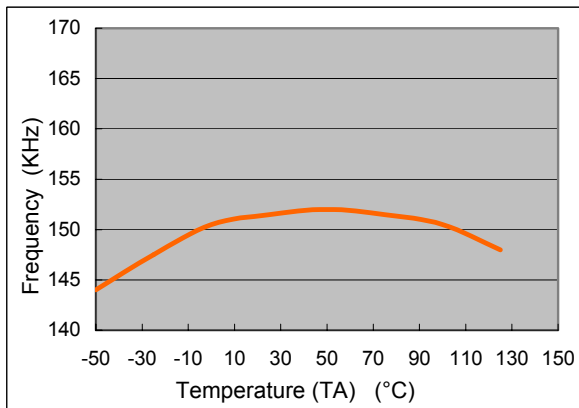

AP1515 Feedback Current v.s. Temperature
($V_{cc}=12V$, $V_{out}=5V, V_{fb}=1.3V$)

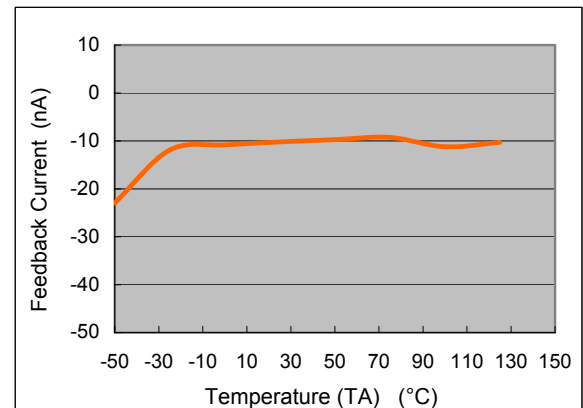

Not Recommended for New Design



AP1515

150KHz, 1.5A PWM Buck DC/DC Converter

■ Function Description

Pin Functions

+V_{IN}

This is the positive input supply for the IC switching regulator. A suitable input bypass capacitor must be present at this pin to minimize voltage transients and to supply the switching currents needed by the regulator.

Ground

Circuit ground.

Output

Internal switch. The voltage at this pin switches between $(+V_{IN} - V_{SAT})$ and approximately $-0.5V$, with a duty cycle of approximately V_{OUT} / V_{IN} . To minimize coupling to sensitive circuitry, the PC board copper area connected to this pin should be kept a minimum.

Feedback

Senses the regulated output voltage to complete the feedback loop.


SD

Allows the switching regulator circuit to be shutdown using logic level signals thus dropping the total input supply current to approximately 150uA. Pulling this pin below a threshold voltage of approximately 1.3V turns the regulator on, and pulling this pin above 1.3V (up to a maximum of 18V) shuts the regulator down. If this shutdown feature is not needed, the SD pin can be wired to the ground pin.


■ Marking Information

(1) SIP-4L

(Top View)

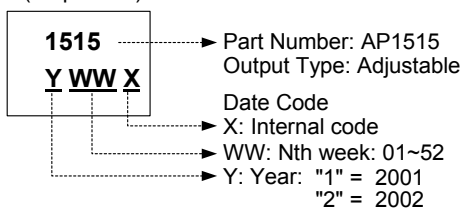


(Top View)

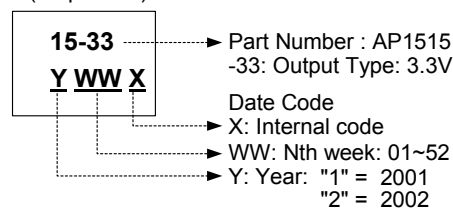

(2) SOP-8L

(Top view)

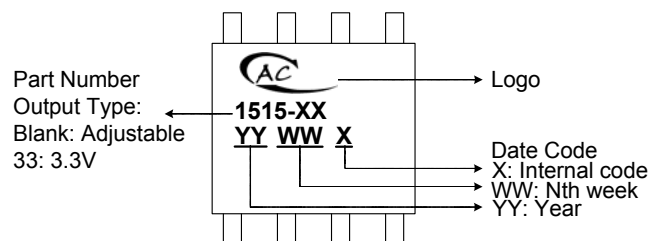

Not Recommended for New Design




AP1515

150KHz, 1.5A PWM Buck DC/DC Converter

■ Package Information

(1) Package Type: SIP-4L

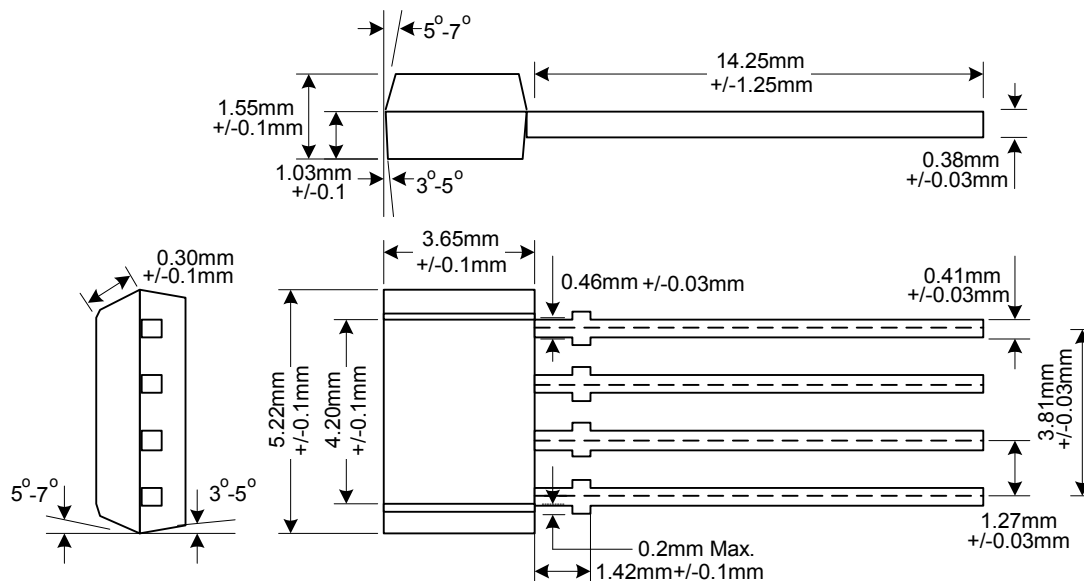

Not Recommended for New Design




AP1515

150KHz, 1.5A PWM Buck DC/DC Converter

■ Package Information (Continued)

(2) Package Type: SOP-8L

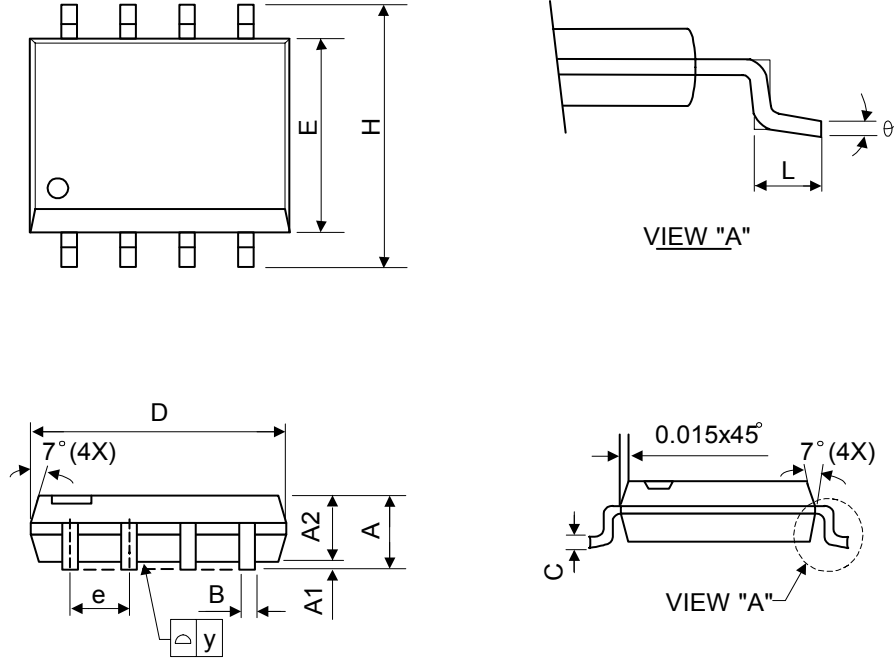

Symbol	Dimensions In Millimeters			Dimensions In Inches		
	Min.	Nom.	Max.	Min.	Nom.	Max.
A	1.40	1.60	1.75	0.055	0.063	0.069
A1	0.10	-	0.25	0.040	-	0.100
A2	1.30	1.45	1.50	0.051	0.057	0.059
B	0.33	0.41	0.51	0.013	0.016	0.020
C	0.19	0.20	0.25	0.0075	0.008	0.010
D	4.80	5.05	5.30	0.189	0.199	0.209
E	3.70	3.90	4.10	0.146	0.154	0.161
e	-	1.27	-	-	0.050	-
H	5.79	5.99	6.20	0.228	0.236	0.244
L	0.38	0.71	1.27	0.015	0.028	0.050
y	-	-	0.10	-	-	0.004
θ	0°	-	8°	0°	-	8°