

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China











ø22mm LED Pilot Light Indicators - AP22M Series

Sunlight-viewable – Ultra-bright LED Indicators!

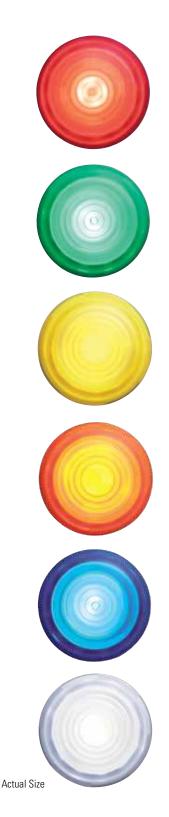



Outstanding visibility, even in direct sunlight.

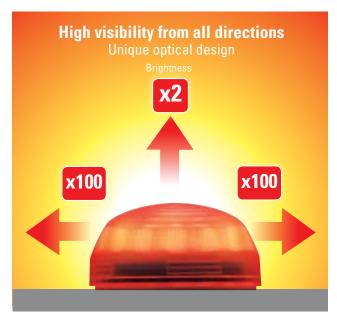

Twice as bright as standard pilot lights when viewed from the front, and up to 100 times brighter than standard pilot lights when viewed from side angles.

ø22mm Ultra-bright LED Pilot Lights - AP22M Series

Key Features

- · Viewable in direct sunlight.
- · Visible from all directions.
- The use of an ultra-bright LED that is not susceptible to external scattered light ensures high visibility and provides for more accurate recognition.
- Integrated terminal cover is IP20 (finger protection), preventing electrical shocks.
- UL and c-UL listed, EN standard compliant.
- · Colored and clear lenses are offered.
- UL Type 4X



Specifications

perature erature	-25 to +55°C (no freezing)		
erature			
	-45 to +80°C (no freezing)		
nidity	45-85%RH (no condensation)		
istance	100MΩ (DC500V megger)		
Category	II (IEC60664-1)		
etric Strength	2.5kV (IEC60664-1, IEC60947-5-1)		
ее	3 (IEC60947-5-1)		
ngth	Between terminals of different poles: 2,000V AC, 1 min Between live and non-live parts: 2,000V AC, 1 min		
Operation limit	5-55Hz half amplitude: 0.5mm		
Damage limit	30Hz half amplitude: 1.5mm		
Operation limit	100m/s² (10G)		
Damage limit	1000m/s² (100G)		
ection	Panel front: IP66 (IEC 60529), UL Type 4X Terminals: IP20		
	M3.5 screw		
Terminal Screw	1.0N•m		
Locking Ring	2.0N•m		
	AWG16 ~ AWG14, 2 wires max.		
x.)	18g		
	stance ategory tric Strength ee ngth Operation limit Damage limit Operation limit Damage limit Comage limit C		

800.262.4332 www.IDEC.com/switches

LED Lamp Ratings

Rated Voltage	12V DC, 24V AC/DC, 120V AC				
Voltage Range	12V DC ±5%, 24V AC/DC ±10%, 120V AC ±10%				
LED Illumination Color	nination Color Red (R), Green (G), Yellow (Y), Amber (A), Blue (S), and White (PW)				
Rated Current	12V DC: R, A, Y - 21mA; G, S, PW - 22mA 24V AC/DC, 120V AC: 24mA (all colors)				
LED Life (Ref.)	Approx. 30,000 Hrs. at rated voltage @ 25°C in specified environmental conditions (The brightness reduces to 50% of initial value.)				
Equivalent Circuit	Colors R, A, and Y X10 X20	Colors G, S, & PW X10 X20	Drawing Key — ☐ LED Chip — ☐ Rectifier Diode — ☐ Zenner Diode — ☐ Resistor		

Part Numbers

Pilot Lights

Appearance	Lens	Rated Voltage	Part Number	Lamp Color
Till 3	Color	12V DC 24V AC/DC 120V AC	AP22M-2Q②①	R G Y A S PW
Time 2	Clear		AP22M-2Q@C①	R G Y A S


- 1. In place of ① insert LED color code: R (red), G (green), Y (yellow), A (amber), S (blue), and PW (white).
- 2. White (PW) only available as colored lens.
- 3. In place of ② insert voltage code. For 12V DC use (3), for 24V AC/DC use (4), for 120V AC use (H).
- 4. LED cannot be removed or replaced.


Accessories & Replacement Parts

Appearance	Material	Part Number	Notes
Locking Ring Wrench	Metal (brass)	MW9Z-T1	Used for mounting unit into a panel.
Lens	Resin	YW9Z-PL12①	Dimension: ø29.8mm H14.5mm In place of ① insert color code: R (red), G (geen), Y (yellow), A (amber), S (blue), C (clear*)
Rubber Gasket	Nitrile rubber	HW9Z-WM	t 0.5 0.15 0.15 0.15 0.15


- 1. Nameplates: HWAM, HWAS-0, and CWAM. Go to www.IDEC.com/usa and review HW and CW Series catalogs for detailed information.
- 2. *Use a clear lens (C) for a PW (White) LED.

Dimensions (mm)



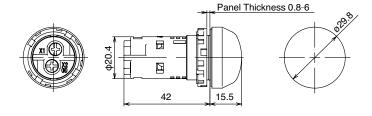

Panel cut-out (mm)



A 3.2mm $^{+0.2}_{0}$ opening (notch) is used to stop rotation. (Not necessary if a nameplate is not used.)

Safety Instructions


Turn off the power before installation, removal, wiring, maintenance and inspection. Failure to turn off power may cause an electrical shock or fire hazard.

When wiring, use proper size wires (AWG16 - AWG14) to meet voltage and current requirements. Tighten the terminal screws to the recommended tightening torque (1.0N•m). Operating with loose terminal screws may cause overheating and fire.

Installation Instructions

Panel Mounting

Remove the locking ring and check if the rubber gasket is properly aligned. Then insert the AP22M unit, align the "TOP" marking with the recess into the panel cut-out, and tighten the locking ring.

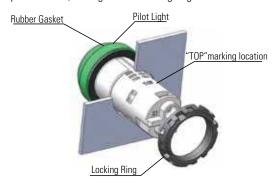

When installing the pilot light into a panel cut-out, use locking ring wrench (part number MW9Z-T1) to tighten the locking ring to the recommended torque of 2.0N •m. Do not use pliers and do not tighten excessively, otherwise the unit may become damaged.

Great Visibility - even from inside a train (automatic safety fence on a train station platform)


Mounting Notes

Applicable Wires

The applicable wire sizes are from AWG14 to AWG16 with 2 wires max. A ring-tongue terminal cannot be used.

Applicable Terminal

Fork Crimp Terminal






Bare Wire



Noise

External noise may cause the LED chips to deteriorate, leading to a reduction in brightness, a change in color, or malfunction. We recommend the following solution if this problem exists. However, please note that this solution will vary depending on the operating environment and the application.



Zener Diode Reference Value Zener Voltage: 15V (1W)



Compact Size - Perfect for mounting in small or narrow surfaces.

