



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!





Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



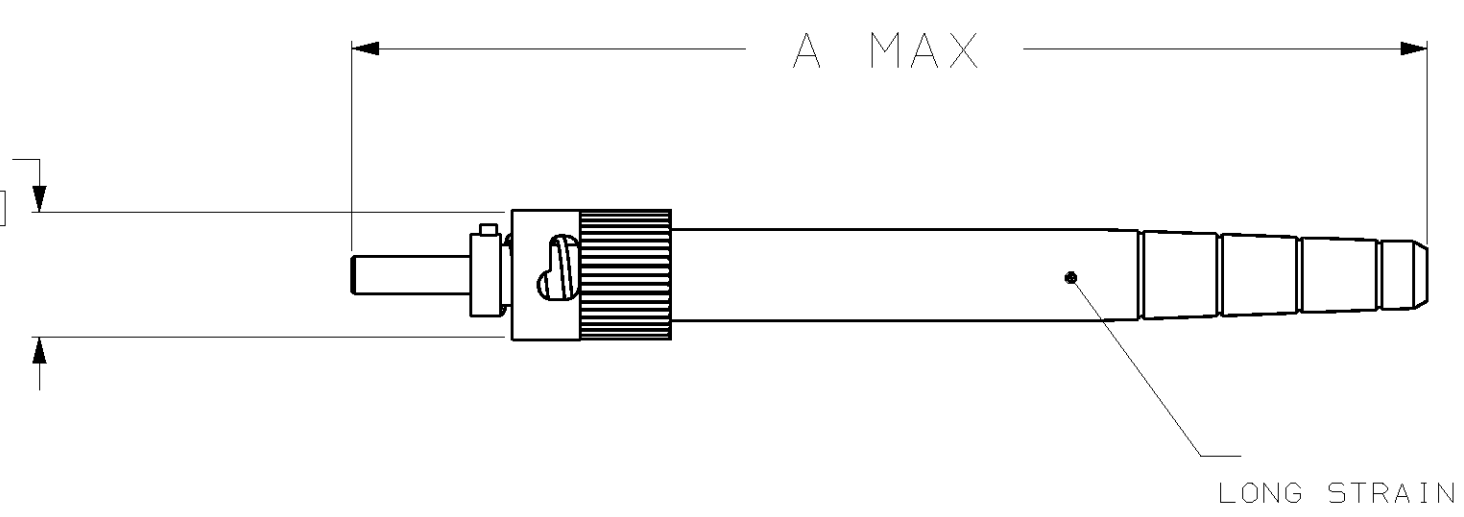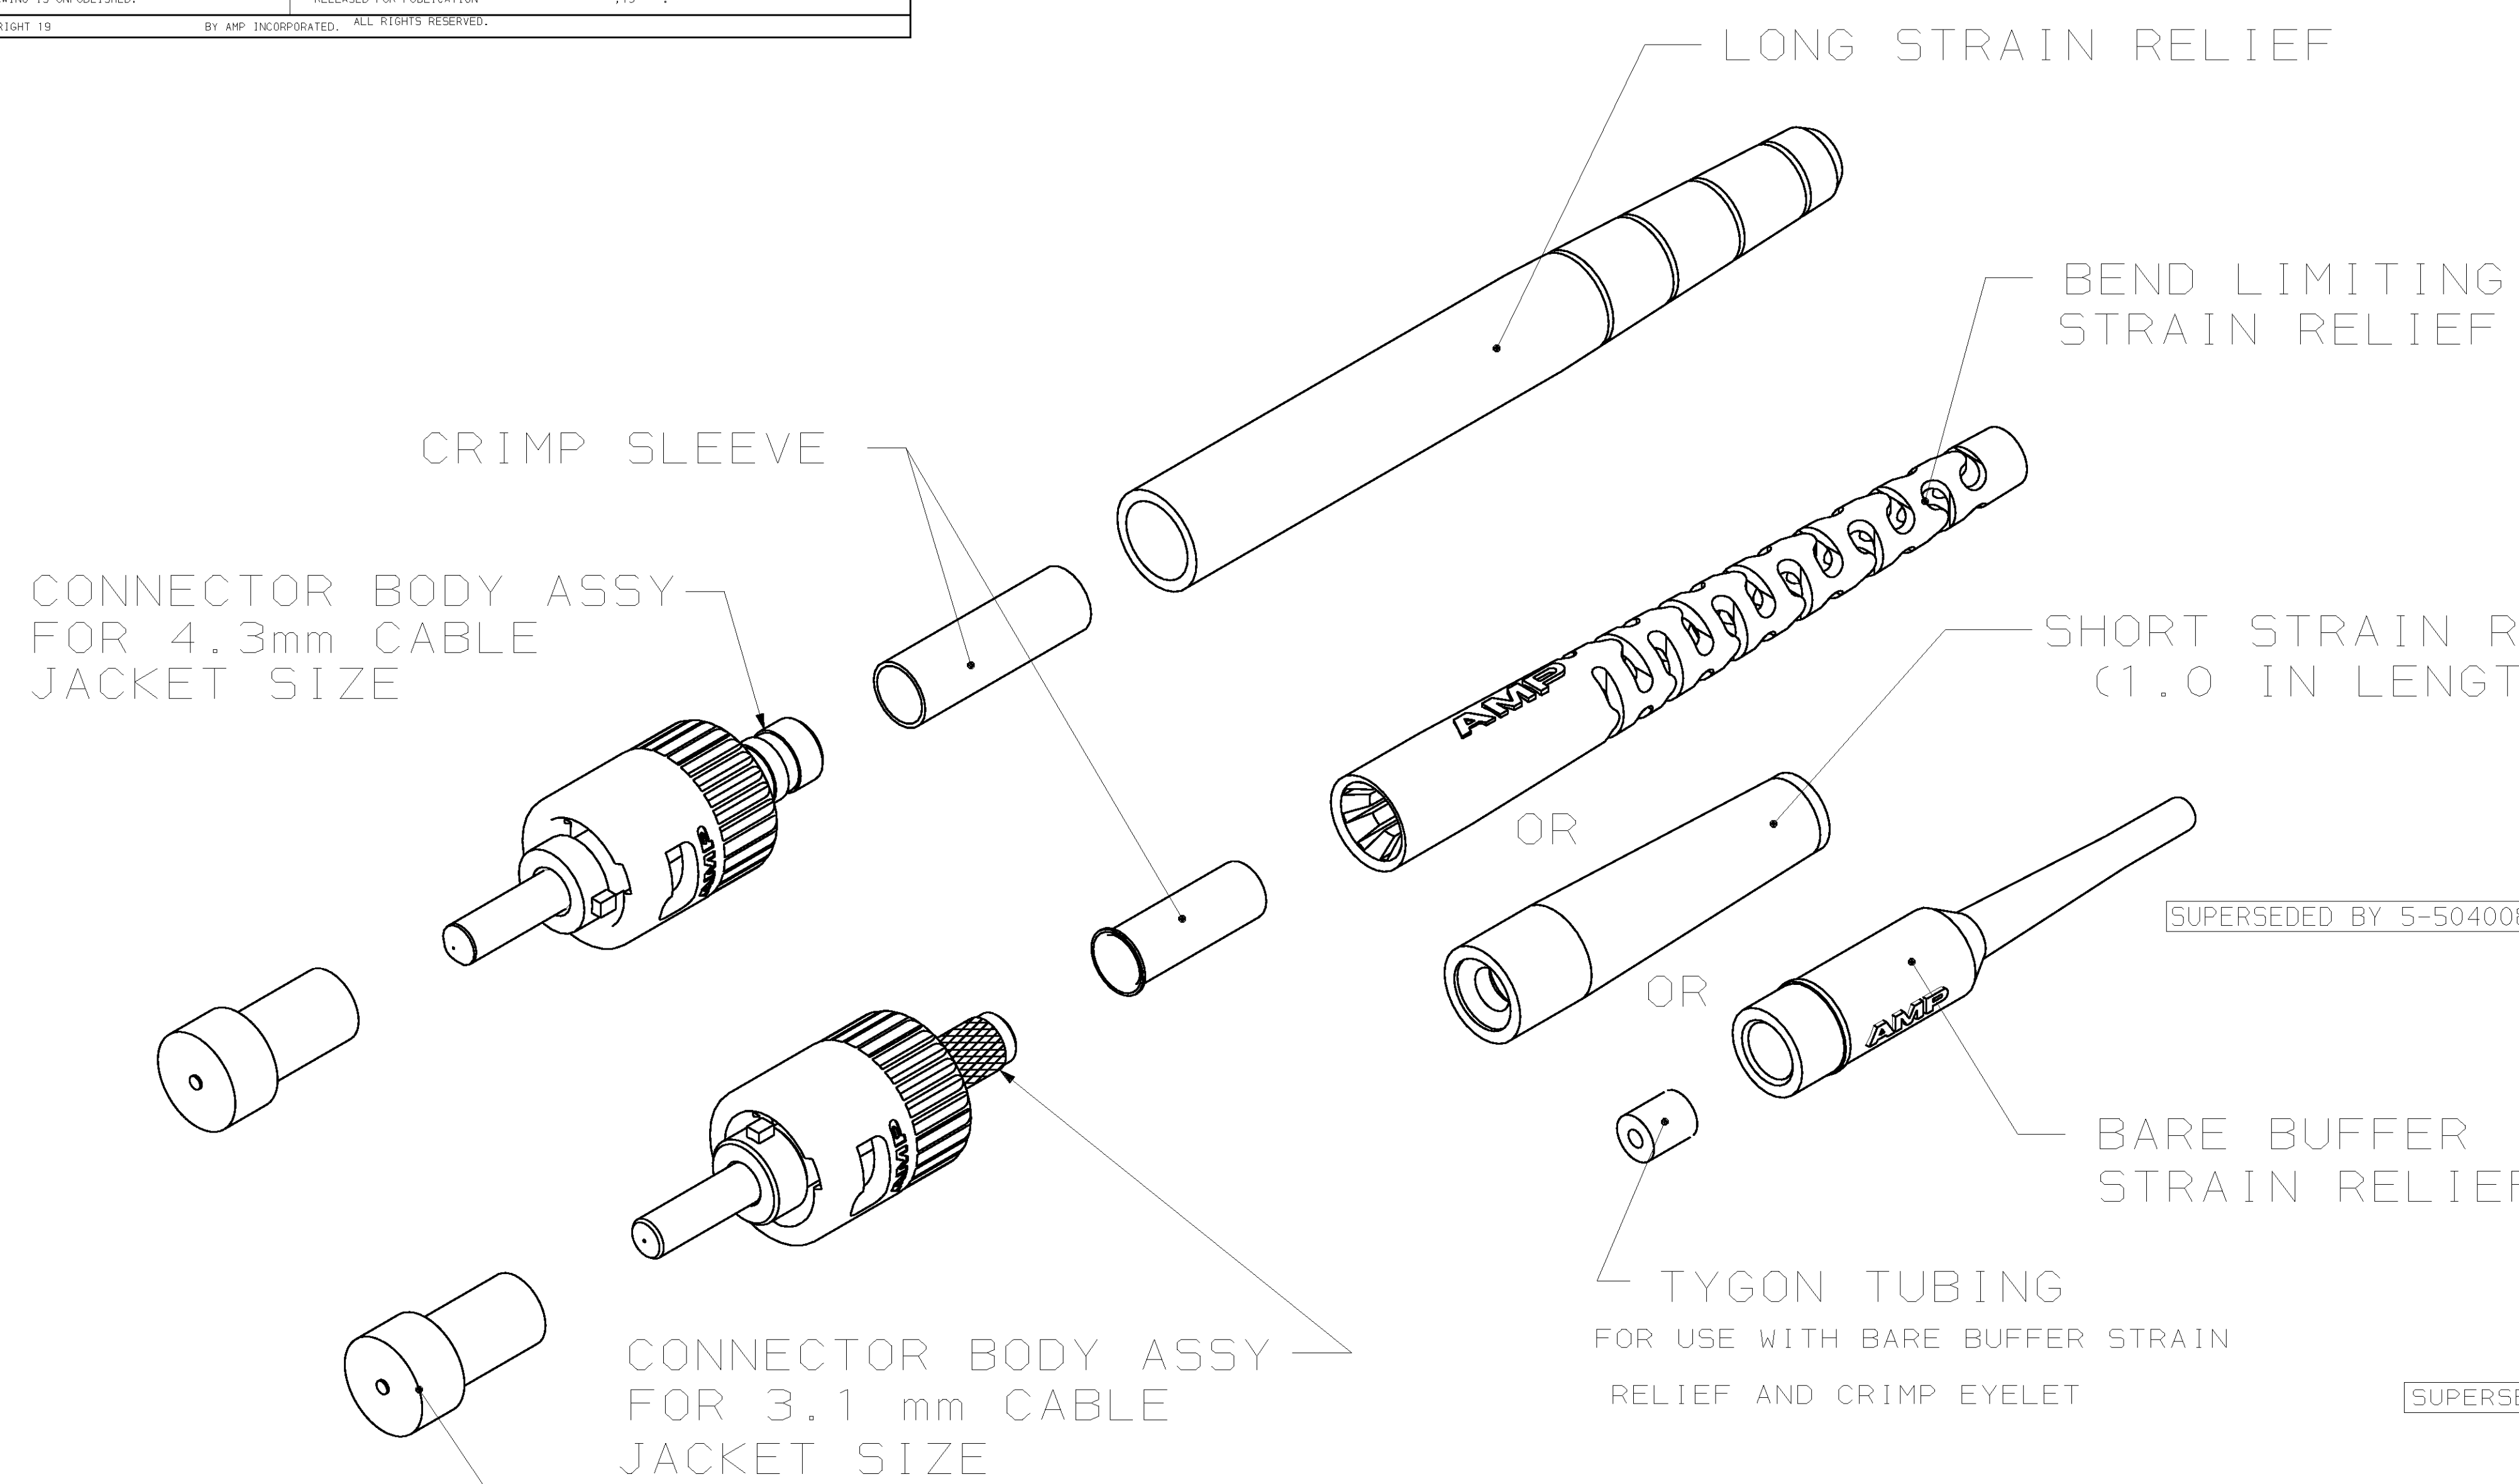

MAX $\phi 9.78$
 $[\phi .385]$

DESCRIPTION	A MAX
LONG STRAIN RELIEF	73.7[2.90]
BEND LIMITING STRAIN RELIEF	77.6[3.06]
SHORT STRAIN RELIEF (1.0 IN)	48.8[1.92]
BARE BUFFER STRAIN RELIEF	56.6[2.23]

- ① BULK PACKAGED
- ② FLAT END FACE
- ③ RADIUS END FACE
- ④ BARE BUFFER STRAIN RELIEF, 900 μ m
- ⑤ BEND LIMITING STRAIN RELIEF (BLACK)
- ⑥ SHORT STRAIN RELIEF (1.0 INCH LENGTH) (BLACK)
- ⑧ BEND LIMITING STRAIN RELIEF (RED)
- ⑨ BEND LIMITING STRAIN RELIEF (BLUE)

- ⑩ NO STRAIN RELIEF
 - ⑪ SHORT STRAIN RELIEF (1.0 INCH LG) (BLUE)
 - ⑫ LONG STRAIN RELIEF (BLACK)
 - ⑬ BEND LIMITING STRAIN RELIEF (BLUE, NO LOGO)
14. ALL KITS FOR 3.1mm MAX CABLE OD USE INSTRUCTION SHEET 408-4151.
 15. ALL KITS FOR 4.3mm MAX CABLE OD USE INSTRUCTION SHEET 408-4162.

DESCRIPTION	MAX CABLE O.D.	HOLE SIZE	PART NUMBER
OBSOLETE	3.1mm	180 μ m	5-504008-5
OBSOLETE	3.1mm	125 μ m	5-504008-4
OBSOLETE	3.1mm	500 μ m	5-504008-3
OBSOLETE	3.1mm	400 μ m	5-504008-2
OBSOLETE	3.1mm	267 μ m	5-504008-1
SUPERSEDED BY 5-504008-4 PLUS 502128-8	3.1mm	125 μ m	5-504008-0
OBSOLETE	3.1mm	140 μ m	4-504008-9
OBSOLETE	3.1mm	140 μ m	4-504008-8
OBSOLETE	3.1mm	140 μ m	4-504008-7
OBSOLETE	3.1mm	280 μ m	4-504008-6
OBSOLETE	4.3mm	600 μ m	4-504008-5
OBSOLETE	3.1mm	436 μ m	4-504008-4
OBSOLETE	3.1mm	250 μ m	4-504008-3
OBSOLETE	3.1mm	160 μ m	4-504008-2
OBSOLETE	3.1mm	231 μ m	4-504008-1
OBSOLETE	3.1mm	125 μ m	4-504008-0
OBSOLETE	3.1mm	229 μ m	3-504008-9
OBSOLETE	3.1mm	280 μ m	3-504008-8
OBSOLETE	3.1mm	126 μ m	3-504008-7
OBSOLETE	3.1mm	140 μ m	3-504008-6
OBSOLETE	4.3mm	240 μ m	3-504008-5
SUPERSEDED BY 1-504008-4	3.1mm	231 μ m	3-504008-4
OBSOLETE	4.3mm	.042 in	3-504008-3
OBSOLETE	3.1mm	640 μ m	3-504008-2
OBSOLETE	3.1mm	336 μ m	3-504008-1
SUPERSEDED BY 504008-7	3.1mm	140 μ m	3-504008-0
SUPERSEDED BY 504008-7	3.1mm	140 μ m	2-504008-9
SUPERSEDED BY 504008-4	4.3mm	125 μ m	2-504008-8
SUPERSEDED BY 5-504008-4 PLUS 1-501457-2	4.3mm	125 μ m	2-504008-7
SUPERSEDED BY 5-504008-4 PLUS 1-501457-2	3.1mm	125 μ m	2-504008-6
SUPERSEDED BY 5-504008-4 PLUS 1-501457-2	3.1mm	125 μ m	2-504008-5
OBSOLETE	3.1mm	125 μ m	2-504008-4
SUPERSEDED BY 5-504008-4 PLUS 1-502128-3	3.1mm	125 μ m	2-504008-3
SUPERSEDED BY 5-504008-4 PLUS 1-501457-8	3.1mm	125 μ m	2-504008-2
SUPERSEDED BY 5-504008-4 PLUS 1-501457-8	3.1mm	125 μ m	2-504008-1
SUPERSEDED BY 5-504008-4 PLUS 1-502128-1	3.1mm	125 μ m	2-504008-0
OBSOLETE	3.1mm	125 μ m	1-504008-9
SUPERSEDED BY 504008-3	3.1mm	125 μ m	1-504008-8
OBSOLETE	3.1mm	125 μ m	1-504008-7
OBSOLETE	4.3mm	410 μ m	1-504008-6
OBSOLETE	3.1mm	436 μ m	1-504008-5
OBSOLETE	3.1mm	231 μ m	1-504008-4
OBSOLETE	3.1mm	240 μ m	1-504008-3
SUPERSEDED BY 5-504008-4 PLUS 501457-8	3.1mm	125 μ m	1-504008-2
SUPERSEDED BY 5-504008-4 PLUS 501457-8	3.1mm	125 μ m	1-504008-1
SUPERSEDED BY 5-504008-4 PLUS 1-503628-5	3.1mm	125 μ m	1-504008-0
SUPERSEDED BY 5-504008-4 PLUS 1-503628-5	3.1mm	125 μ m	504008-9
OBSOLETE	4.3mm	140 μ m	504008-8
OBSOLETE	3.1mm	140 μ m	504008-7
SUPERSEDED BY 504008-8	4.3mm	140 μ m	504008-6
SUPERSEDED BY 504008-7	3.1mm	140 μ m	504008-5
OBSOLETE	4.3mm	125 μ m	504008-4
OBSOLETE	3.1mm	125 μ m	504008-3
SUPERSEDED BY 504008-4	4.3mm	125 μ m	504008-2
SUPERSEDED BY 504008-3	3.1mm	125 μ m	504008-1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS (mm [INCHES])	TOLERANCES UNLESS OTHERWISE SPECIFIED:	0 PLC $\pm .01$	1 PLC $\pm .02$	2 PLC $\pm .03$	3 PLC $\pm .04$	4 PLC $\pm .05$	ANGLES	FINISH

AMP Incorporated
 Harrisburg, PA 17105-3608

CONNECTOR KIT, SST, 2.5mm BAYONET, OPTIMATE

AMP 00779-504008

CUSTOMER DRAWING