



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





Capable of 2A to 3A high-frequency load switching	PhotoMOS[®] HE 1 Form A High Capacity
--	---

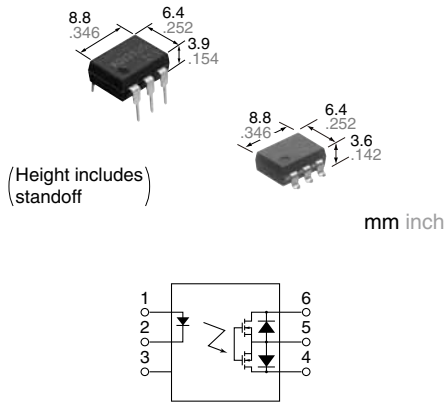

RoHS compliant

FEATURES

- 1. Greatly increased load current in a compact DIP package**
Continuous load current: 3.5A (AQV251G)
- 2. Greatly improved specifications allow you to use this in place of mercury and mechanical relays.**
- 3. Low on-resistance (typ. 35mΩ, AQV251G)**

TYPICAL APPLICATIONS

- **Measuring instrument market** (Testers etc.)
- **Industrial machinery and equipment**
- **Power supply controls**
- **Security/Disaster prevention market** I/O sections of warning devices, security systems, etc.

TYPES

	Output rating*		Package	Part No.				Packing quantity	
				Through hole terminal	Surface-mount terminal		Tube	Tape and reel	
	Load voltage	Load current			Tube packing style	Tape and reel packing style			
					Picked from the 1/2/3-pin side	Picked from the 4/5/6-pin side			
AC/DC dual use	30 V	3.5 A	DIP6-pin	AQV251G	AQV251GA	AQV251GAX	AQV251GAZ	1 tube contains: 50 pcs. 1 batch contains: 500 pcs.	1,000 pcs.
	60 V	2.5 A	DIP6-pin	AQV252G	AQV252GA	AQV252GAX	AQV252GAZ		

*Indicate the peak AC and DC values.
Note: The surface mount terminal indicator "A" and the packing style indicator "X" or "Z" are not marked on the device.

RATING

1. Absolute maximum ratings (Ambient temperature: 25°C 77°F)


	Item	Symbol	Type of connection	AQV251G(A)		AQV252G(A)		Remarks
Input	LED forward current	I _F	/	50 mA				
	LED reverse voltage	V _R		5 V				
	Peak forward current	I _{FP}		1 A				f = 100 Hz, Duty factor = 0.1%
	Power dissipation	P _{in}		75 mW				
Output	Load voltage (peak AC)	V _L		30 V	60 V			
	Continuous load current	I _L	A	3.5 A	2.5 A		A connection: Peak AC, DC B, C connection: DC	
			B	4.0 A	3.5 A			
			C	6.0 A	5.0 A			
	Peak load current	I _{peak}		6.0 A				100ms (1 shot), V _L = DC
Power dissipation	P _{out}		600 mW					
Total power dissipation		P _T		650 mW				
I/O isolation voltage		V _{iso}		1,500 V AC				
Temperature limits	Operating	T _{opr}		-40°C to +85°C -40°F to +185°F				Non-condensing at low temperatures
	Storage	T _{stg}		-40°C to +100°C -40°F to +212°F				

HE 1 Form A High Capacity

2. Electrical characteristics (Ambient temperature: 25°C 77°F)

Item		Symbol	Type of connection	AQV251G(A)	AQV252G(A)	Condition	
Input	LED operate current	Typical	I _{Fon}	—	0.55 mA	0.5 mA	
		Maximum			3 mA	3 mA	I _L = 100mA
	LED turn off current	Minimum	I _{Foff}	—	0.2 mA	0.2 mA	I _L = 100mA
Typical		0.45 mA			0.45 mA		
	LED dropout voltage	Typical	V _F	—	1.14 V (1.32 V at I _F = 50 mA)		I _F = 5 mA
		Maximum			1.5 V		
Output	On resistance	Typical	R _{on}	A	0.035 Ω	0.08 Ω	I _F = 5 mA I _L = Max. Within 1 s on time
		Maximum			0.08 Ω	0.12 Ω	
		Typical	R _{on}	B	0.018 Ω	0.04 Ω	
		Maximum			0.04 Ω	0.06 Ω	
		Typical	R _{on}	C	0.01 Ω	0.02 Ω	
		Maximum			0.02 Ω	0.03 Ω	
	Off state leakage current	Maximum	I _{Leak}	—	1 μA		I _F = 0 mA, V _L = Max.
Transfer characteristics	Turn on time*	Typical	T _{on}	—	1.1 ms		I _F = 5 mA, I _L = 100 mA V _L = 10 V
		Maximum			5.0 ms		
	Turn off time*	Typical	T _{off}	—	0.1 ms	0.25 ms	I _F = 5 mA, I _L = 100 mA V _L = 10 V
		Maximum			0.5 ms		
	I/O capacitance	Typical	C _{iso}	—	0.8 pF		f = 1 MHz V _B = 0 V
		Maximum			1.5 pF		
Initial I/O isolation resistance	Minimum	R _{iso}	—	1,000 MΩ		500 V DC	
Max. switching frequency	Maximum	—	—	10 times/s	—	I _F = 5 mA, duty = 50% V _L × I _L = 100 V·A	

*Turn on/Turn off time

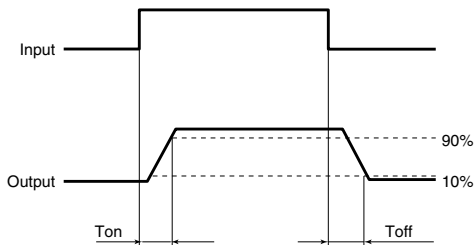

RECOMMENDED OPERATING CONDITIONS

Please obey the following conditions to ensure proper device operation and resetting.

Item	Symbol	Recommended value	Unit
Input LED current	I _F	5 to 10	mA


■ These products are not designed for automotive use.

If you are considering to use these products for automotive applications, please contact your local Panasonic Corporation technical representative.

REFERENCE DATA


1.-(1) Load current vs. ambient temperature characteristics

Tested sample: AQV251G;
Allowable ambient temperature: -40°C to +85°C
-40°F to +185°F

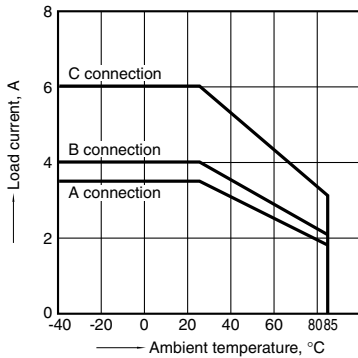


1.-(2) Load current vs. ambient temperature characteristics

Tested sample: AQV252G;
Allowable ambient temperature: -40°C to +85°C
-40°F to +185°F

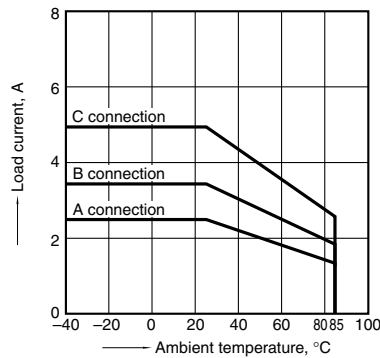


2. On resistance vs. ambient temperature characteristics

Measured portion: between terminals 4 and 6;
LED current: 5 mA; Load voltage: Max. (DC)
Continuous load current: Max.(DC)

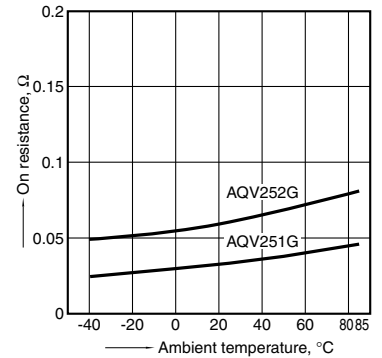


3. Turn on time vs. ambient temperature characteristics

Tested sample: All; LED current: 5 mA; Load voltage: 10 V (DC); Continuous load current: 100 mA (DC)

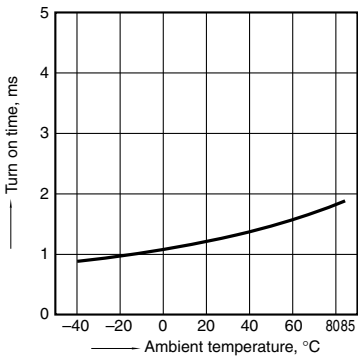


4. Turn off time vs. ambient temperature characteristics

LED current: 5 mA; Load voltage: 10 V (DC); Continuous load current: 100 mA (DC)

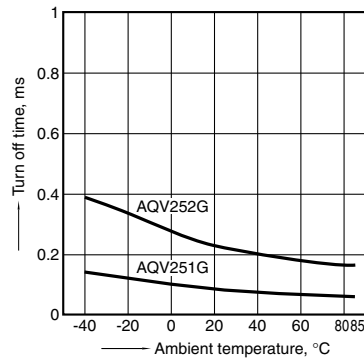


5. LED operate current vs. ambient temperature characteristics

Tested sample: All; Load voltage: 10 V (DC); Continuous load current: 100mA (DC)

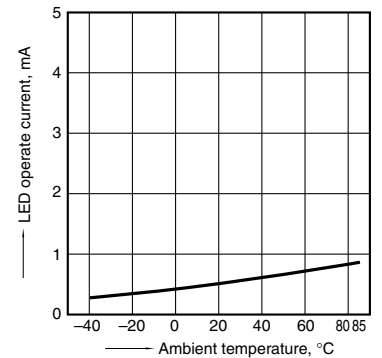


6. LED turn off current vs. ambient temperature characteristics

Tested sample: All; Load voltage: 10 V (DC); Continuous load current: 100mA (DC)

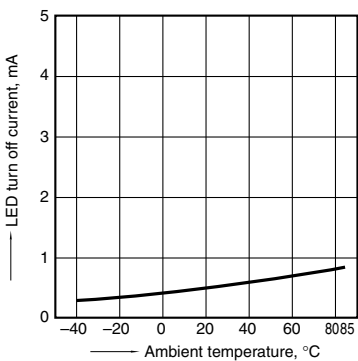


7. LED dropout voltage vs. ambient temperature characteristics

Tested sample: All;
LED current: 5 to 50 mA

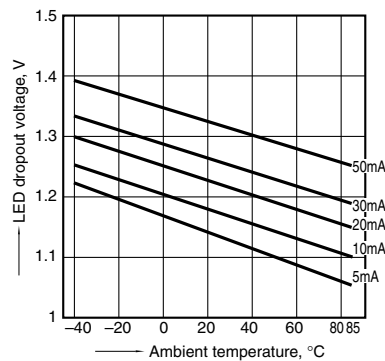

8. Current vs. voltage characteristics of output at MOS portion


Measured portion: between terminals 4 and 6;
Ambient temperature: 25°C 77°F

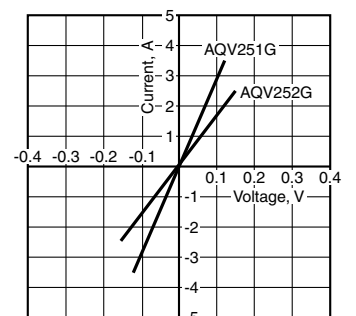

HE 1 Form A High Capacity


9. Off state leakage current vs. load voltage characteristics

Measured portion: between terminals 4 and 6;
Ambient temperature: 25°C 77°F

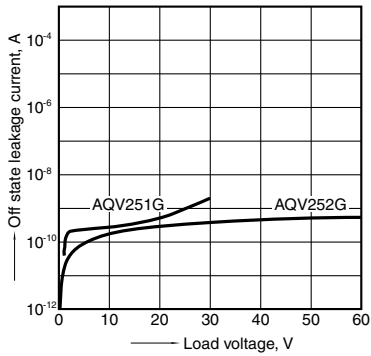


10. Turn on time vs. LED forward current characteristics

Measured portion: between terminals 4 and 6;
Tested sample: All; Load voltage: 10 V (DC);
Continuous load current: 100 mA (DC);
Ambient temperature: 25°C 77°F

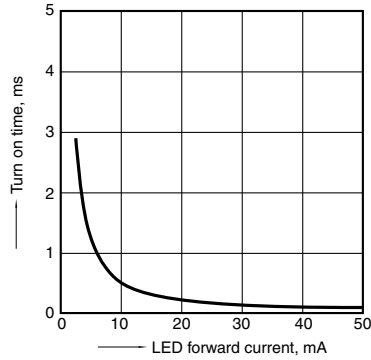


11. Turn off time vs. LED forward current characteristics

Measured portion: between terminals 4 and 6;
Load voltage: 10 V (DC);
Continuous load current: 100 mA (DC);
Ambient temperature: 25°C 77°F

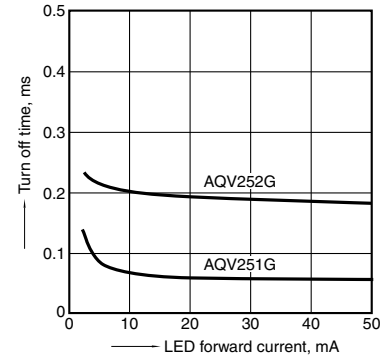

12. Output capacitance vs. applied voltage characteristics

Measured portion: between terminals 4 and 6;
Frequency: 1 MHz; Ambient temperature: 25°C 77°F

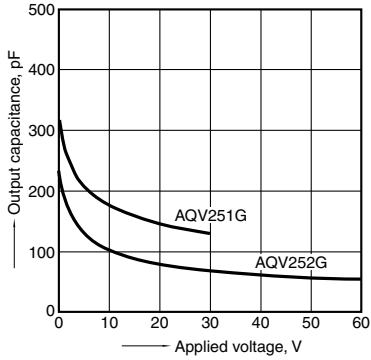

13. Max. switching frequency

Tested sample: AQV251G;
LED current: 5 mA;
Ambient temperature: 25°C 77°F

