



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




## AUTOMATIC VOLTAGE SWITCH (SMPS < 500W)

### CONTROLLER

- 50/60Hz FULL COMPATIBILITY
- INTEGRATED VOLTAGE REGULATOR
- TRIGGERING PULSE TRAIN OF THE TRIAC
- PARASITIC FILTER
- LOW POWER CONSUMPTION

### TRIAC

- HIGH EFFICIENCY AND SAFETY SWITCHING
- UNINSULATED PACKAGE : AVS12CB
- $V_{DRM} = \pm 600 V$
- $I_{T(RMS)} : 12A$

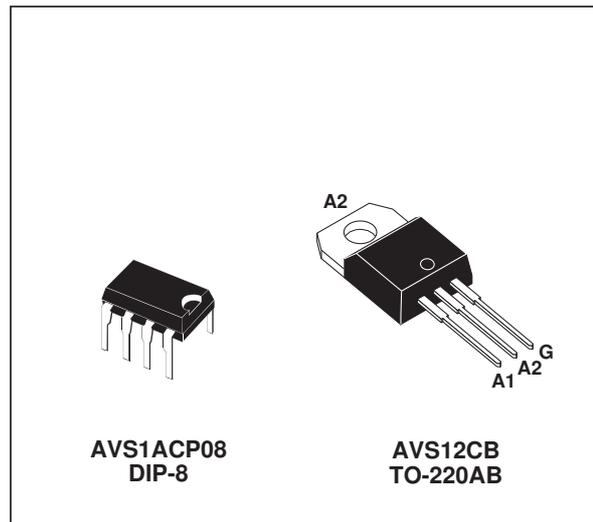


### DESCRIPTION

The AVS12 kit is an automatic mains selector (110/220V AC) to be used in SMPS < 500 W. It is composed of 2 devices :


- The **Controller** is optimized for low consumption and high security triggering of the triac. When connected to  $V_{SS}$ , the **mode** input activates an additional **option**. If the main power drops from 220V to 110V, the triac control remains locked to the 220V mode and avoids any high voltage spike when the voltage is restored to 220V. When connected to  $V_{DD}$ , the mode input deactivates this option.
- The **TRIAC** is specially designed for this application. An optimization between sensitivity and dynamic parameters of the triac gate highly reduces the losses of supply resistor and allows excellent immunity against disturbances.

### PIN CONNECTION

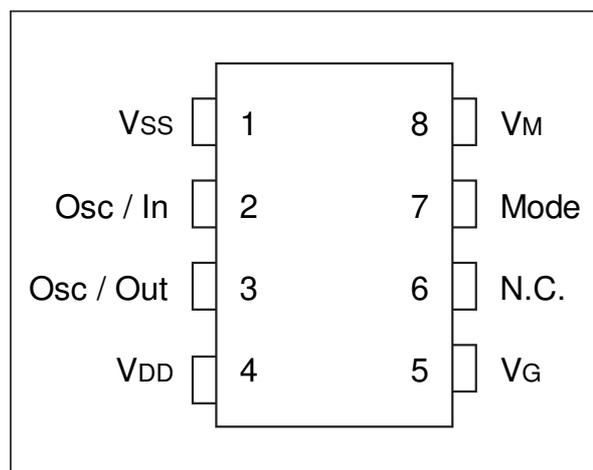

# AVS12

## BLOCK DIAGRAM

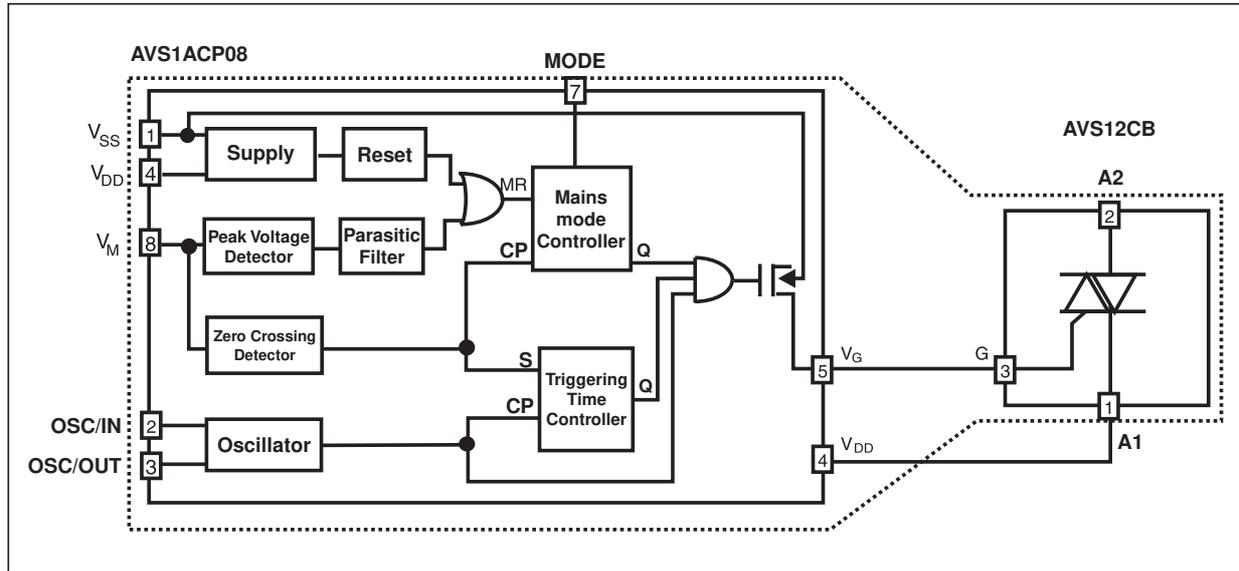

## ABSOLUTE MAXIMUM RATINGS CONTROLLER AVS1ACP08

| Symbol                          | Parameter                      | Value                 |      | Unit |
|---------------------------------|--------------------------------|-----------------------|------|------|
|                                 |                                | Min.                  | Max. |      |
| V <sub>SS</sub>                 | Supply voltage                 | -12                   | 0.5  | V    |
| V <sub>I</sub> / V <sub>O</sub> | I / O voltage                  | V <sub>SS</sub> - 0.5 | 0.5  | V    |
| I <sub>I</sub> / I <sub>O</sub> | I / O current                  | -40                   | +40  | mA   |
| T <sub>stg</sub>                | Storage Temperature            | -60                   | +150 | °C   |
| T <sub>oper</sub>               | Operating Temperature code "C" | 0                     | +70  | °C   |

## TRIAC AVS12CB T<sub>j</sub> = +25°C (unless otherwise specified)

| Symbol                             | Parameter  |                       | Value                  | Unit                  |                  |
|------------------------------------|--|-----------------------|------------------------|-----------------------|------------------|
| V <sub>DRM</sub>                   | Repetitive peak off-state voltage (2)  |                       | ± 600                  | V                     |                  |
| I <sub>T(RMS)</sub>                | RMS on-state current (360° conduction angle)                                 | T <sub>C</sub> = 70°C | 12                     | A                     |                  |
| I <sub>TSM</sub>                   | Non repetitive surge peak on-state current ( T <sub>j</sub> initial = 25°C ) |                       | t = 8.3ms<br>t = 10ms  | 105<br>100            | A                |
| I <sup>2</sup> t                   | I <sup>2</sup> t value   |                       | t = 10ms               | 50                    | A <sup>2</sup> s |
| di / dt                            | Critical rate of rise of on-state current (1)                                |                       | Repetitive<br>F = 50Hz | 20                    | A/μs             |
|                                    |  |                       | Non Repetitive         | 100                   |                  |
| dV/dt *                            | Linear slope up to 0.67 V <sub>DRM</sub>                                     | Gate open             | T <sub>j</sub> = 110°C | 50                    | V/μs             |
| T <sub>stg</sub><br>T <sub>j</sub> | Storage Temperature<br>Junction Temperature Range                            |                       |                        | - 40 + 150<br>0 + 125 | °C               |

(1) Gate supply : I<sub>G</sub> = 100mA – di/dt = 1A/μs  
(2) T<sub>j</sub> = 110°C

\* For either polarity of electrode A2 voltage with reference to electrode A1

**THERMAL RESISTANCE**  
TRIAC AVS12CB


| Symbol       | Parameter   | Value | Unit |
|--------------|---|-------|------|
| Rth (j-a)    | Junction to ambient                                   | 60    | °C/W |
| Rth (j-c) DC | Junction to case for DC                               | 3     | °C/W |
| Rth (j-c) AC | Junction to case for 360° conduction angle (F = 50Hz) | 2.3   | °C/W |

**DC GENERAL ELECTRICAL CHARACTERISTICS**  
TRIAC AVS12CB


| Symbol             | Parameter   | Value                  |      | Unit |
|--------------------|---|------------------------|------|------|
|                    |   | Min.                   | Max. |      |
| V <sub>GD</sub>    | V <sub>D</sub> = V <sub>DRM</sub> RL = 3.3kΩ Pulse duration > 20μs T <sub>j</sub> = 110°C | 0.2                    |      | V    |
| V <sub>TM</sub> *  | I <sub>TM</sub> = 17A t <sub>p</sub> = 10ms T <sub>j</sub> = 25°C                         |                        | 1.75 | V    |
| I <sub>DRM</sub> * | V <sub>DRM</sub> rated Gate open T <sub>j</sub> = 25°C                                    |                        | 10   | μA   |
|                    |   | T <sub>j</sub> = 110°C | 500  |      |

\* For either polarity of electrode A2 voltage with reference to electrode A1


**Fig. 1:** Maximum RMS power dissipation versus RMS on-state current (F = 60Hz). (Curves are cut off by (di/dt)<sub>c</sub> limitation)

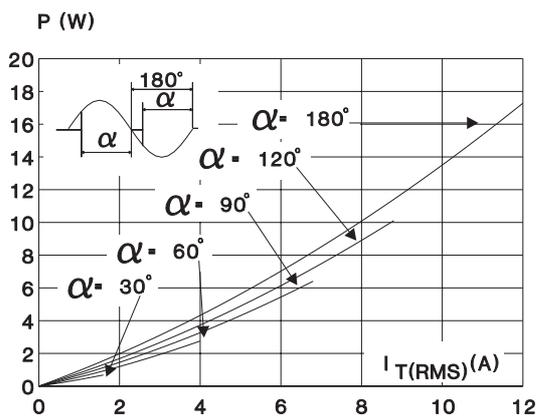


**Fig. 2:** Correlation between maximum mean power dissipation and maximum allowable temperature (T<sub>amb</sub> and T<sub>case</sub>) for different thermal resistances heatsink + contact.

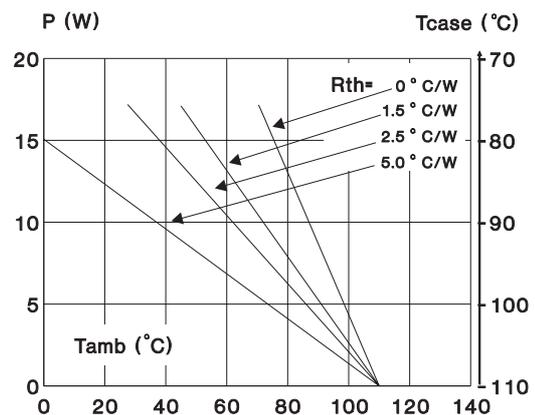

**Fig. 3:** Non repetitive surge peak on-state current for a sinusoidal pulse with width:  $t \leq 10\text{ms}$ , and corresponding value of  $I^2t$ .

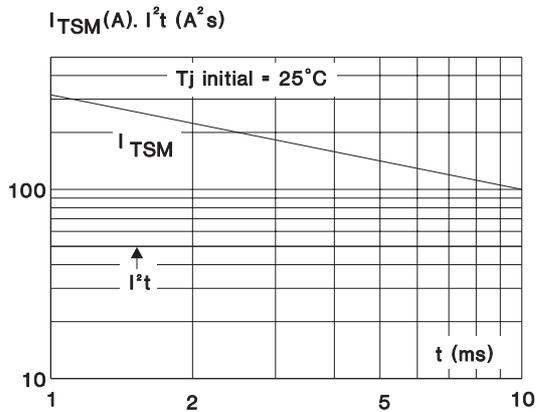

**Fig. 4:** On-state characteristics (maximum values).

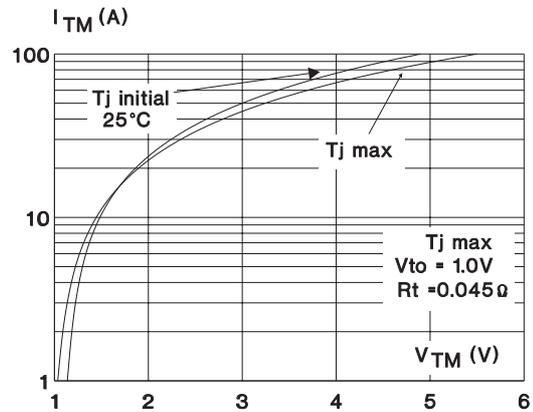


**DC GENERAL ELECTRICAL CHARACTERISTICS** (continued)  
 CONTROLLER AVS1ACP08 Toper = 25°C (unless otherwise specified)

| Symbol   | Parameter                                | Value         |                       |               | Unit |
|--|--|---------------|-----------------------|---------------|------|
|  |  | Min.          | Typ.                  | Max.          |      |
| $V_{SS}$ (pin 1) (Vreg)  | Shunt regulator                          | -10           | -9                    | -8            | V    |
| $I_{SS}$ (pin 1) (Vreg)<br>(@ $V_{SS} = 9\text{V}$ )               | Supply current                           | 0.4           |                       | 30            | mA   |
| $I_{SS}$ (pin 1)<br>(@ triac gate non connected)                   | Quiescent current                        |               |                       | 0.7           | mA   |
| F (pin 3)<br>(@ $R = 91\text{k}\Omega$ )<br>( $C = 100\text{pF}$ ) | Oscillator frequency                     | 42            | 44                    | 46            | KHz  |
| $V_M$ (pin 8) $V_{th}$ (3)   | Peak voltage of detection high-threshold | 4.08          | 4.25                  | 4.42          | V    |
| $V_M$ (pin 8) $V_h$ (3)  | Peak voltage of detection hysteresis     | 0.370         | 0.4                   | 0.420         | V    |
| (1) $V_M$ (pin 8) $V_{th}$ (3)                                     | Zero-crossing detection high-threshold   | 95            | 110                   | 125           | mV   |
| $V_M$ (pin 8) $V_h$ (3)  | Zero-crossing detection hysteresis       | 27            | 50                    | 80            | mV   |
| (2) $V_{razht}$ (4)  | Power-on-reset activation threshold      |               | $V_{reg} \times 0.89$ |               | V    |
| (2) $V_{razilt}$ (4)   | Power-down-reset activation threshold    | 3             |                       | 6.5           | V    |
| Mode (pin 7)   | $V_{IL}$ (4)<br>$V_{IH}$ (4)             | 0.7 $V_{reg}$ |                       | 0.3 $V_{reg}$ | V    |


**NOTE:**

- (1) : This value gives a typical noise immunity on the zero-crossing detection of  $110\text{mV} \times 1018/18 = 6.20\text{V}$  on the main supply
- (2) : See following diagram
- (3) : Voltage referred to  $V_{SS}$
- (4) : Voltage referred to  $V_{DD}$

POWER-ON AND POWER-OFF RESET BEHAVIOUR

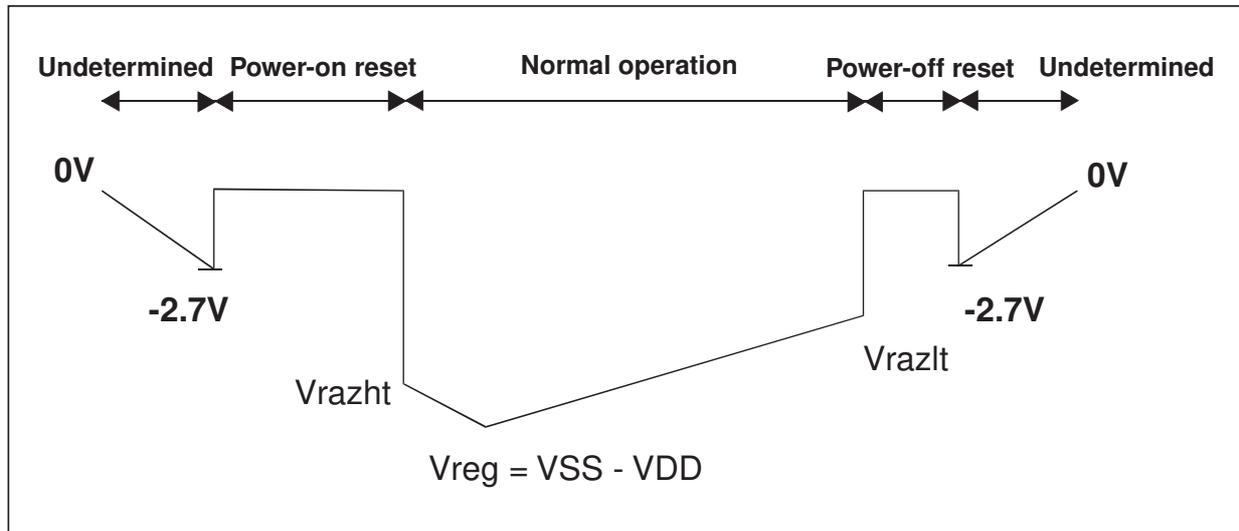


TYPICAL APPLICATION

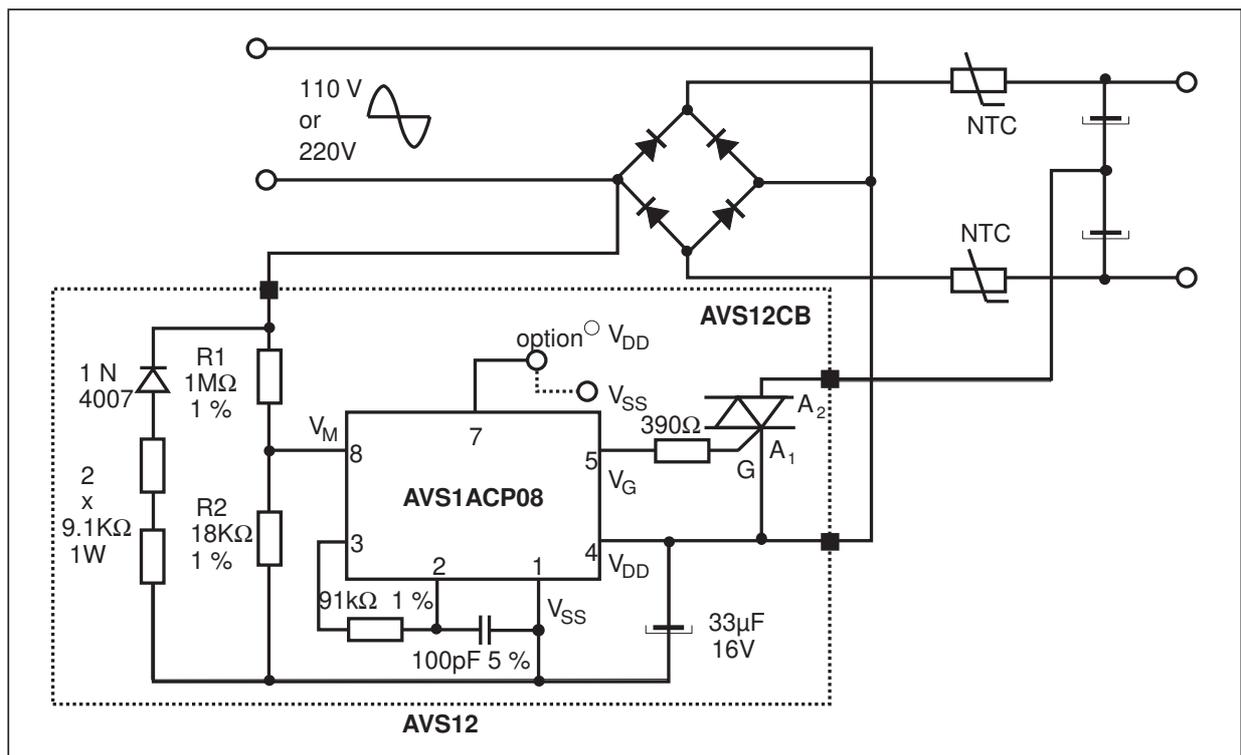


# AVS12

## ORDERING INFORMATION

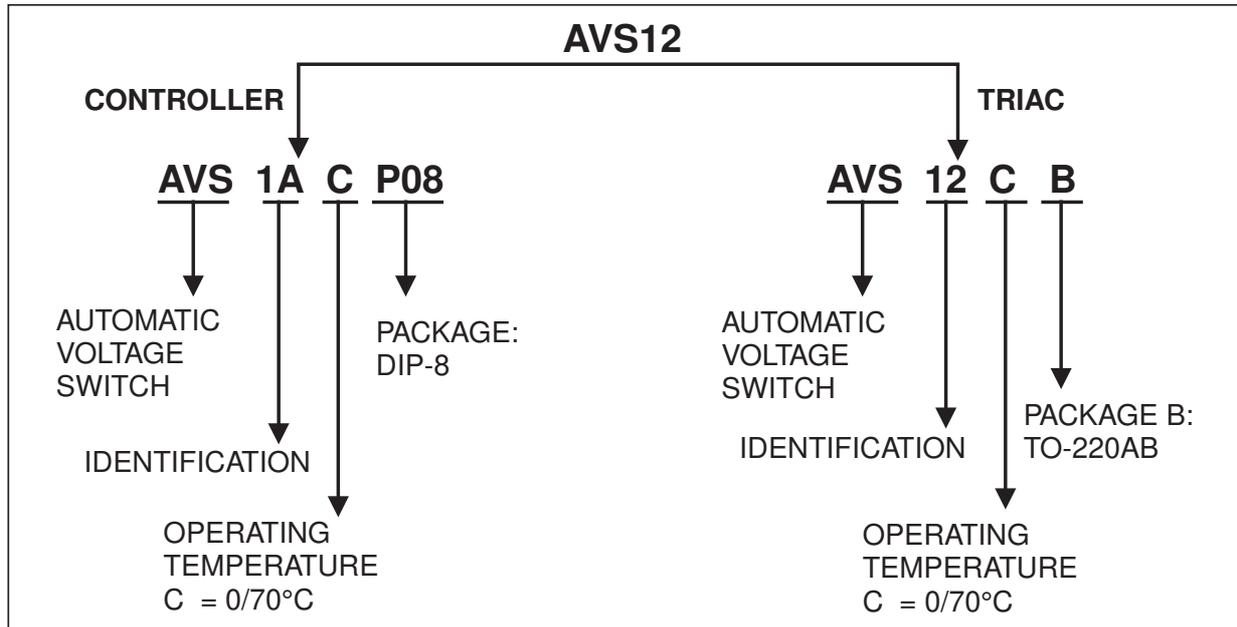


## PACKAGE MECHANICAL DATA

DIP-8 Plastic (controller)

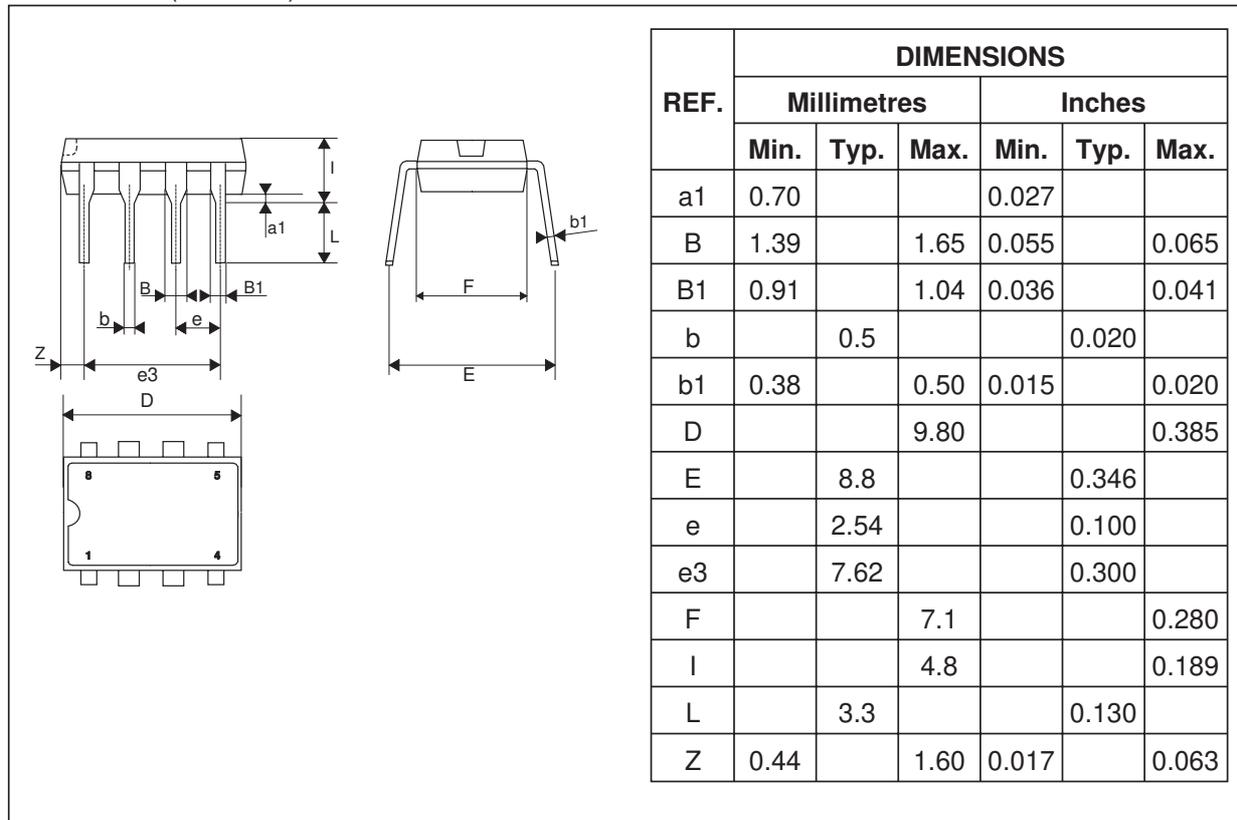

**PACKAGE MECHANICAL DATA**  
TO-220AB (Plastic) (Triac)

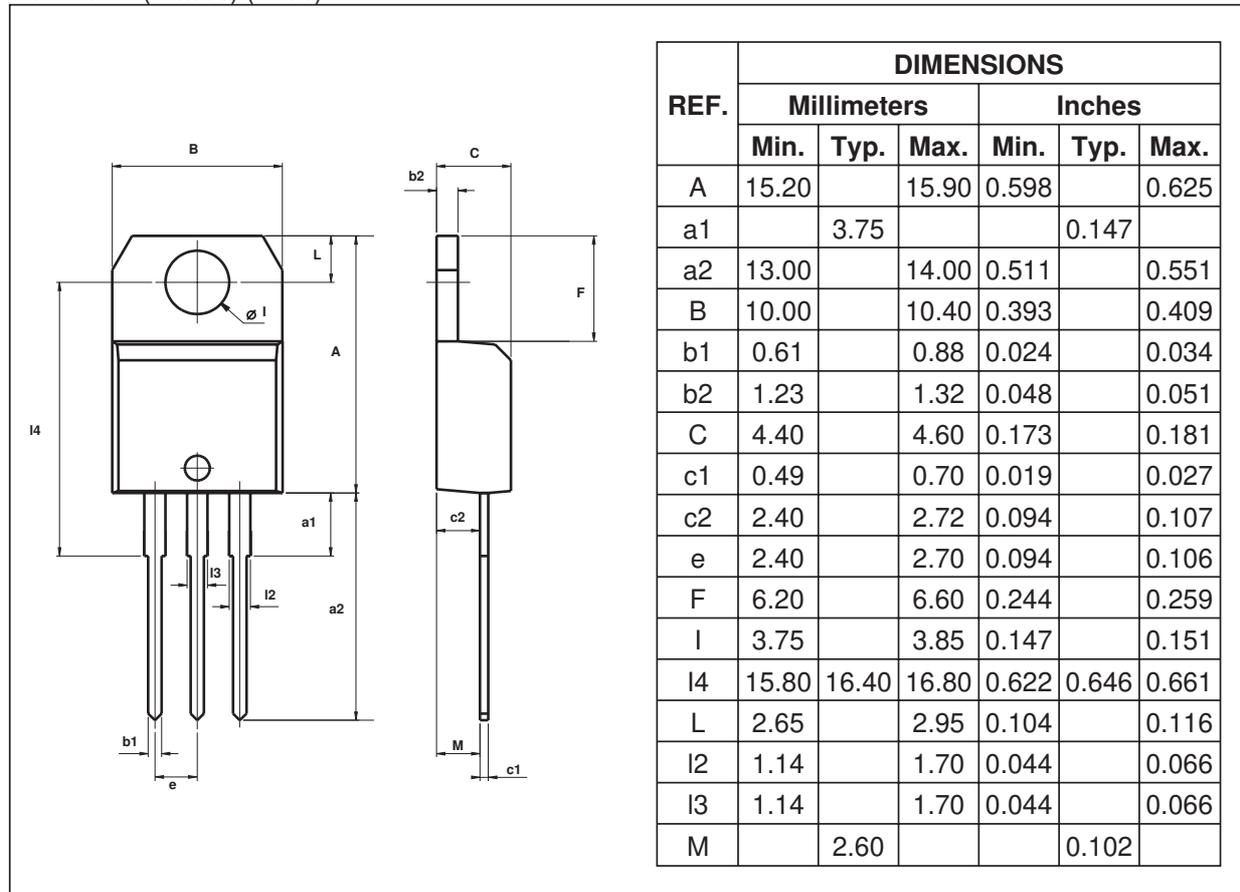

- Cooling method: C
- Recommended torque value: 0.8 m.N
- Maximum torque value: 1 m.N

**OTHER INFORMATION**

| Part Number | Marking   | Weight | Base Qty | Packing mode |
|-------------|-----------|--------|----------|--------------|
| AVS12CB     | AVS12CB   | 2.3 g  | 1000     | Tube         |
| AVS1ACP08   | AVS1ACP08 | 0.6 g  | 2000     | Tube         |

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

The ST logo is a registered trademark of STMicroelectronics  
 © 2002 STMicroelectronics - Printed in Italy - All rights reserved.  
 STMicroelectronics GROUP OF COMPANIES  
 Australia - Brazil - Canada - China - Finland - France - Germany  
 Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Singapore  
 Spain - Sweden - Switzerland - United Kingdom - United States.

<http://www.st.com>

