



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





# *SAW Components*

*Data Sheet B7720*

Data Sheet

A large, stylized, 3D-rendered graphic of the EPCOS logo. The letters "EPCOS" are rendered in a white, glowing, sans-serif font, appearing to be part of a larger, curved structure that resembles a stylized globe or a series of overlapping planes. The background is dark and textured.



**SAW Components**

**B7720**

**Low-Loss Filter for Mobile Communication**

**1960,0 MHz**

**Data Sheet**




**Chip Sized SAW Package DCS6I**

**Features**

- Low-loss RF filter for mobile telephone PCS systems, receive path
- High selectivity
- Low amplitude ripple
- Usable passband 60 MHz
- Unbalanced to balanced operation
- No external matching required
- Package for **Surface Mounted Technology (SMT)**

**Terminals**


- Gold-plated Ni

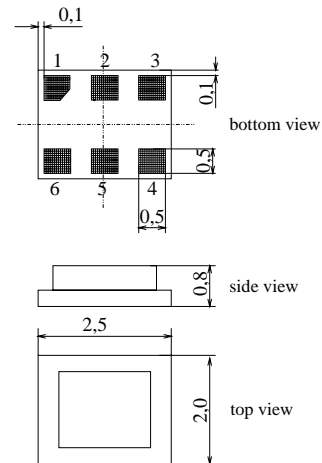

Dimensions in mm, approx. weight 0,014 g

**Pin configuration**

- 2 Input
- 4, 6 Balanced output
- 1, 3, 5 To be grounded



Type	Ordering code	Marking and Package according to	Packing according to
B7720	B39202-B7720-C610	C61157-A7-A76	F61074-V8112-Z000

Electrostatic Sensitive Device (ESD)

**Maximum ratings**

Operable temperature range	$T$	- 40 / + 85	°C	
Storage temperature range	$T_{stg}$	- 40 / + 85	°C	
DC voltage	$V_{DC}$	5	V	
ESD voltage	$V_{ESD}$	50	V	
Input power at				peak power of GSM signal, duty cycle 4:8
GSM850, GSM900	$P_{IN}$	15	dBm	
GSM1800, GSM1900	$P_{IN}$	12	dBm	
GSM1800, GSM1900	$P_{IN}$	13	dBm	
Tx bands				duty cycle 2:8



**SAW Components**

**B7720**

**Low-Loss Filter for Mobile Communication**

**1960,0 MHz**

**Data Sheet**



**Characteristics**

Operating Temperature Range:  $T = +25 \pm 2^\circ \text{C}$   
 Terminating source impedance:  $Z_S = 50 \Omega$  (unbalanced)  
 Terminating load impedance:  $Z_L = 50 \Omega$  (balanced)

		min.	typ.	max.	
<b>Center frequency</b>	$f_C$	—	1960,0	—	MHz
<b>Maximum insertion attenuation</b>	$\alpha_{\max}$	—	2,7	3,1*	dB
1930,0 ... 1990,0 MHz					
<b>Amplitude ripple (p-p)</b>	$\Delta\alpha$	—	0,9	1,5	dB
1930,0 ... 1990,0 MHz					
<b>Input VSWR</b>		—	1,8	2,0	
1930,0 ... 1990,0 MHz					
<b>Output VSWR</b>		—	1,8	2,0	
1930,0 ... 1990,0 MHz					
<b>Output phase balance (<math>\phi(S_{31}) - \phi(S_{21}) + 180^\circ</math>)</b>		-15	—	17	°
1930,0 ... 1990,0 MHz					
<b>Output amplitude balance (<math> S_{31}/S_{21} </math>)</b>		-3,0	—	3,0	dB
1930,0 ... 1990,0 MHz					
<b>Differential to common mode suppression</b>	$S_{sc12}$				
855,0 ... 995,0 MHz		22,0	29,0	—	dB
1710,0 ... 1930,0 MHz		20,0	25,0	—	dB
1930,0 ... 1975,0 MHz		18,0	20,0	—	dB
1975,0 ... 1990,0 MHz		18,0	18,0	—	dB
3420,0 ... 3980,0 MHz		22,0	28,0	—	dB
<b>Attenuation</b>	$\alpha$				
DC ... 1600,0 MHz		28	33	—	dB
1600,0 ... 1830,0 MHz		25	28	—	dB
1830,0 ... 1910,0 MHz		12	15	—	dB
2010,0 ... 2070,0 MHz		14	18	—	dB
2070,0 ... 4000,0 MHz		23	25	—	dB
4000,0 ... 5000,0 MHz		18	20	—	dB
5000,0 ... 6000,0 MHz		16	19	—	dB

\* the insertion attenuation includes also pcb losses of typ. 0,2dB



**SAW Components**

**B7720**

**Low-Loss Filter for Mobile Communication**

**1960,0 MHz**

**Data Sheet**



**Characteristics**

Operating Temperature Range:  $T = -10$  to  $+80^{\circ}\text{C}$   
 Terminating source impedance:  $Z_S = 50\ \Omega$  (unbalanced)  
 Terminating load impedance:  $Z_L = 50\ \Omega$  (balanced)

		<b>min.</b>	<b>typ.</b>	<b>max.</b>	
<b>Center frequency</b>	$f_C$	—	1960,0	—	MHz
<b>Maximum insertion attenuation</b>	$\alpha_{\max}$				
1930,0 ... 1990,0 MHz		—	2,8	3,4*	dB
<b>Amplitude ripple (p-p)</b>	$\Delta\alpha$				
1930,0 ... 1990,0 MHz		—	1,0	1,8	dB
<b>Input VSWR</b>					
1930,0 ... 1990,0 MHz		—	1,8	2,0	
<b>Output VSWR</b>					
1930,0 ... 1990,0 MHz		—	1,8	2,0	
<b>Output phase balance (<math>\phi(S_{31})-\phi(S_{21})+180^{\circ}</math>)</b>					
1930,0 ... 1990,0 MHz		-15	—	17	$^{\circ}$
<b>Output amplitude balance (<math> S_{31}/S_{21} </math>)</b>					
1930,0 ... 1990,0 MHz		-3,0	—	3,0	dB
<b>Differential to common mode suppression</b>	$S_{sc12}$				
855,0 ... 995,0 MHz		22,0	29,0	—	dB
1710,0 ... 1930,0 MHz		20,0	25,0	—	dB
1930,0 ... 1975,0 MHz		18,0	20,0	—	dB
1975,0 ... 1990,0 MHz		17,0	18,0	—	dB
3420,0 ... 3980,0 MHz		22,0	28,0	—	dB
<b>Attenuation</b>	$\alpha$				
DC ... 1600,0 MHz		28	33	—	dB
1600,0 ... 1830,0 MHz		25	28	—	dB
1830,0 ... 1910,0 MHz		10	11	—	dB
2010,0 ... 2070,0 MHz		10	14	—	dB
2070,0 ... 4000,0 MHz		23	25	—	dB
4000,0 ... 5000,0 MHz		18	20	—	dB
5000,0 ... 6000,0 MHz		16	19	—	dB

\* the insertion attenuation includes also pcb losses of typ. 0,2dB



**SAW Components**

**B7720**

**Low-Loss Filter for Mobile Communication**

**1960,0 MHz**

**Data Sheet**



**Characteristics**

Operating Temperature Range:  $T = -40$  to  $+85^{\circ}\text{C}$   
 Terminating source impedance:  $Z_S = 50\ \Omega$  (unbalanced)  
 Terminating load impedance:  $Z_L = 50\ \Omega$  (balanced)


		<b>min.</b>	<b>typ.</b>	<b>max.</b>	
<b>Center frequency</b>	$f_C$	—	1960,0	—	MHz
<b>Maximum insertion attenuation</b>	$\alpha_{\max}$	—	3,6	4,1*	dB
1930,0 ... 1990,0 MHz					
<b>Amplitude ripple (p-p)</b>	$\Delta\alpha$	—	1,8	2,5	dB
1930,0 ... 1990,0 MHz					
<b>Input VSWR</b>		—	2,0	2,2	
1930,0 ... 1990,0 MHz					
<b>Output VSWR</b>		—	2,0	2,2	
1930,0 ... 1990,0 MHz					
<b>Output phase balance</b> ( $\phi(S_{31}) - \phi(S_{21}) + 180^{\circ}$ )		-15	—	17	°
1930,0 ... 1990,0 MHz					
<b>Output amplitude balance</b> ( $ S_{31}/S_{21} $ )		-3,5	—	3,0	dB
1930,0 ... 1990,0 MHz					
<b>Differential to common mode suppression</b>	$S_{sc12}$				
855,0 ... 995,0 MHz		22,0	29,0	—	dB
1710,0 ... 1930,0 MHz		20,0	25,0	—	dB
1930,0 ... 1975,0 MHz		18,0	20,0	—	dB
1975,0 ... 1990,0 MHz		16,0	18,0	—	dB
3420,0 ... 3980,0 MHz		22,0	28,0	—	dB
<b>Attenuation</b>	$\alpha$				
DC ... 1600,0 MHz		28	33	—	dB
1600,0 ... 1830,0 MHz		25	28	—	dB
1830,0 ... 1910,0 MHz		10	11	—	dB
2010,0 ... 2070,0 MHz		6**	7**	—	dB
2070,0 ... 4000,0 MHz		23	25	—	dB
4000,0 ... 5000,0 MHz		18	20	—	dB
5000,0 ... 6000,0 MHz		16	19	—	dB

\* the insertion attenuation includes also pcb losses of typ. 0,2dB


\*\* 8dB min. (9dB typ.) for  $T = -30$  to  $+85^{\circ}\text{C}$



Transfer function (T=-10 ... 80 °C)(narrow band)

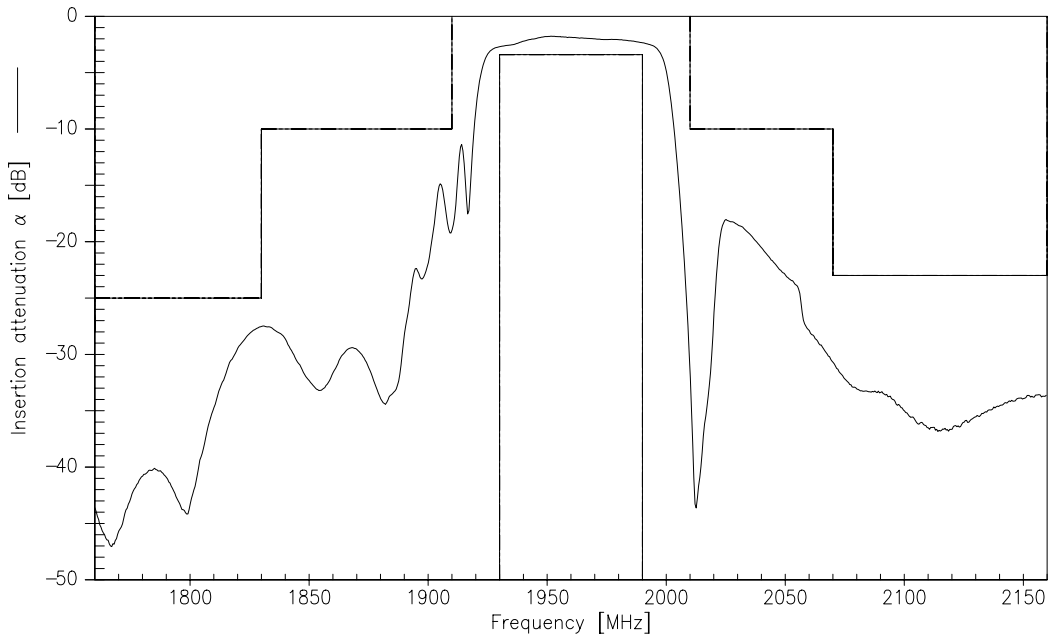


Transfer function (wide band)

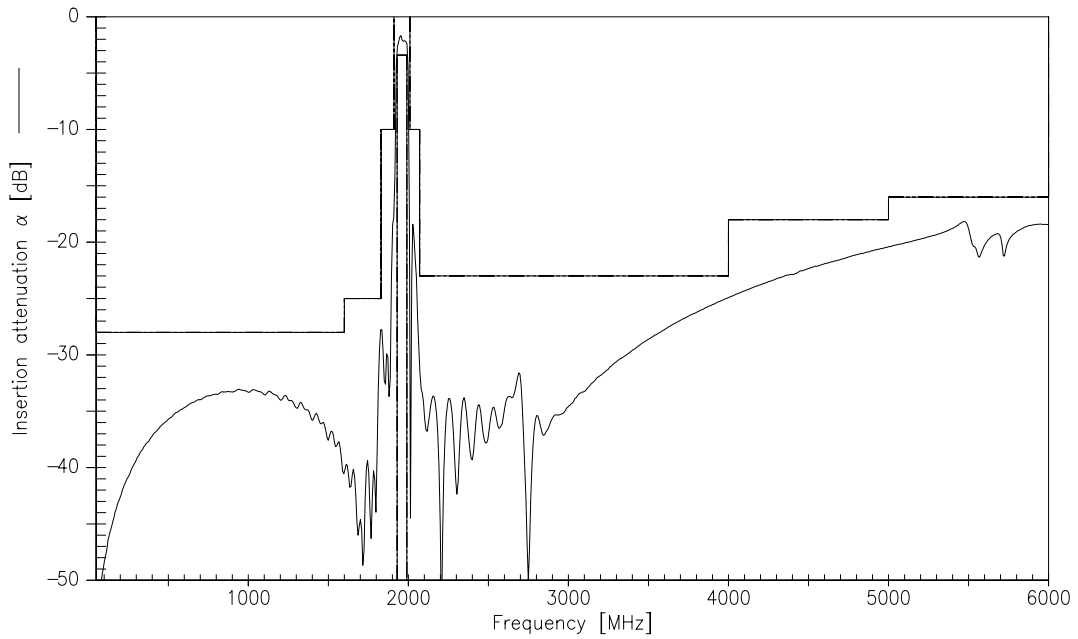




VSWR (T=-10 ... 80 °C)(narrow band)

Input

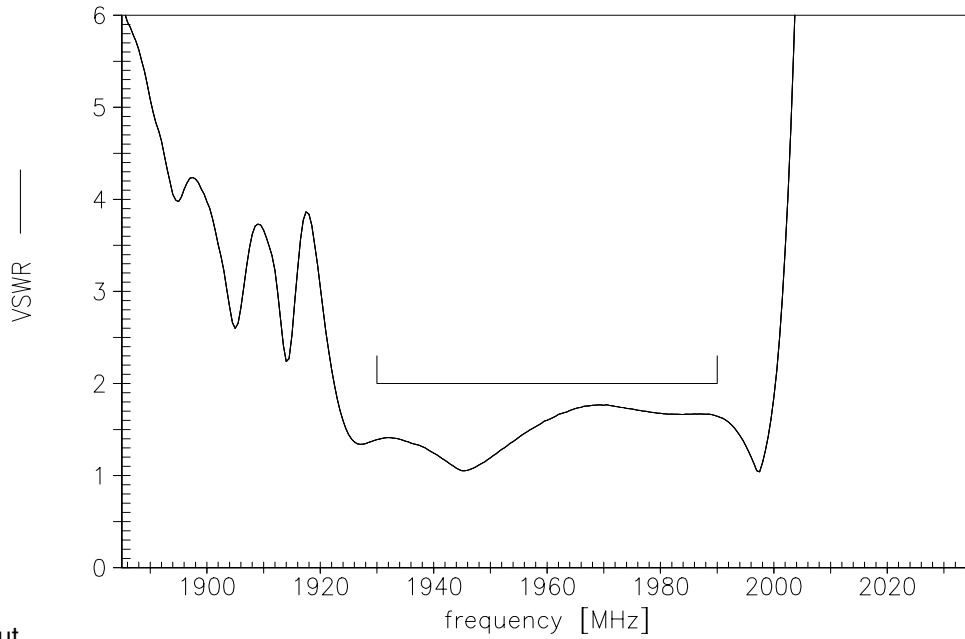

Output

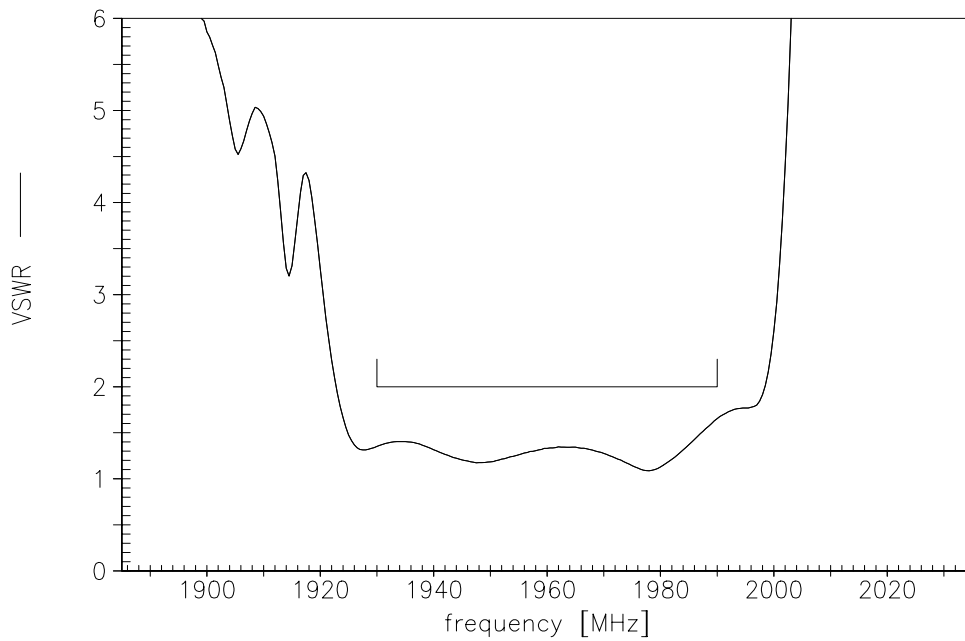





**SAW Components**

**B7720**

**Low-Loss Filter for Mobile Communication**

**1960,0 MHz**

Data Sheet



**Published by EPCOS AG**

**Surface Acoustic Wave Components Division, SAW MC WT**

**P.O. Box 80 17 09, 81617 Munich, GERMANY**

© EPCOS AG 2002. Reproduction, publication and dissemination of this brochure and the information contained therein without EPCOS' prior express consent is prohibited.

Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.