



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





RF360 Europe GmbH

A Qualcomm – TDK Joint Venture

## SAW Components

### SAW Duplexer

WCDMA Band 4/ CDMA 1x AWS Band

Series/type:	B8524
Ordering code:	B39212B8524P810
Date:	July 12, 2013
Version:	2.0

RF360 products mentioned within this document are offered by RF360 Europe GmbH and other subsidiaries of RF360 Holdings Singapore Pte. Ltd. (collectively, the “RF360 Subsidiaries”). RF360 Holdings Singapore Pte. Ltd. is a joint venture of Qualcomm Global Trading Pte. Ltd. and EPCOS AG. References in this documentation to EPCOS AG should properly reference, and shall be read to reference, the RF360 Subsidiaries.

RF360 Europe GmbH, Anzinger Str. 13, München, Germany

© 2016 RF360 Europe GmbH and/or its affiliated companies. All rights reserved.

These materials, including the information contained herein, may be used only for informational purposes by the customer. The RF360 Subsidiaries assume no responsibility for errors or omissions in these materials or the information contained herein. The RF360 Subsidiaries reserve the right to make changes to the product(s) or information contained herein without notice. The materials and information are provided on an AS IS basis, and the RF360 Subsidiaries assume no liability and make no warranty or representation, either expressed or implied, with respect to the materials, or any output or results based on the use, application, or evaluation of such materials, including, without limitation, with respect to the non-infringement of trademarks, patents, copyrights or any other intellectual property rights or other rights of third parties.

No use of this documentation or any information contained herein grants any license, whether express, implied, by estoppel or otherwise, to any intellectual property rights, including, without limitation, to any patents owned by QUALCOMM Incorporated or any of its subsidiaries.

Not to be used, copied, reproduced, or modified in whole or in part, nor its contents revealed in any manner to others without the express written permission of RF360 Europe GmbH.

Qualcomm and Qualcomm RF360 are trademarks of Qualcomm Incorporated, registered in the United States and other countries. RF360 is a trademark of Qualcomm Incorporated. Other product and brand names may be trademarks or registered trademarks of their respective owners.

This technical data may be subject to U.S. and international export, re-export, or transfer ("export") laws. Diversion contrary to U.S. and international law is strictly prohibited.



# SAW Components

## SAW Duplexer

WCDMA Band 4/ CDMA 1x AWS Band

<b>Series/type:</b>	<b>B8524</b>
<b>Ordering Code:</b>	<b>B39212B8524P810</b>
Date:	July 12, 2013
Version:	2.0

© EPCOS AG 2015. Reproduction, publication and dissemination of this publication, enclosures hereto and the information contained therein without EPCOS' prior express consent is prohibited.

EPCOS AG is a TDK Group Company.


**Data Sheet**

**Application**


- Low-loss SAW duplexer for mobile telephone WCDMA Band 4 / CDMA 1x AWS systems
- Low insertion attenuation
- Low amplitude ripple
- Usable passband 45 MHz
- Single-ended to balanced transformation in Antenna-Rx path
- Impedance transformation 50Ω to 100Ω in Antenna-Rx path
- High isolation between Tx and Rx


**Features**

- Package size 1.8 x 1.4 mm<sup>2</sup>, package height 0.475 mm max.
- RoHS compatible
- Approx. weight 0.005g
- Package for **Surface Mount Technology (SMT)**
- Ni, Au-plated terminals
- Balanced Rx port, unbalanced Tx port
- **Electrostatic Sensitive Device (ESD)**
- **Moisture Sensitivity Level 3**

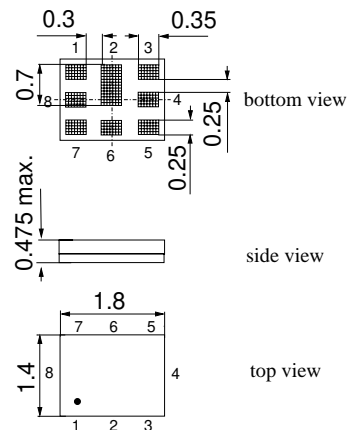
**Pin configuration**

- 3 Tx input, unbalanced
- 1,8 Rx output, balanced
- 6 Antenna
- 2, 4, 5, 7 To be grounded

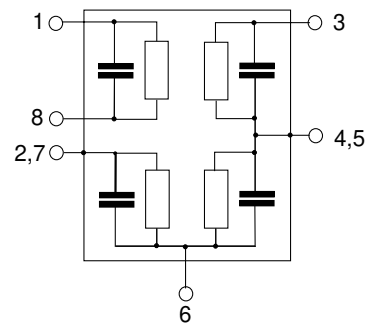


**Characteristics for W-CDMA Band 4**

Temperature range for specification:	T = -15 °C to +80 °C
Antenna terminating impedance:	Z <sub>ANT</sub> = 50 Ω    2.6nH
RX terminating impedance:	Z <sub>RX</sub> = 100 Ω (balanced)    18nH
TX terminating impedance:	Z <sub>TX</sub> = 50 Ω

Characteristics TX - Antenna		B8524		
		min.	typ. @ 25 °C	max.
<b>Center frequency</b>	f <sub>C</sub>		1732.5	MHz
<b>Maximum insertion attenuation</b>	α			
@f <sub>Carrier</sub> 1712.4 ... 1752.6 MHz	α <sub>WCDMA</sub> <sup>1)</sup>		1.1	1.8 dB
<b>Amplitude ripple (p-p)</b>	Δα			
@f <sub>Carrier</sub> 1712.4 ... 1752.6 MHz	Δα <sub>WCDMA</sub> <sup>1)</sup>		0.4	0.9 dB
<b>Error vector magnitude</b>	EVM <sup>2)</sup>			
@f <sub>Carrier</sub> 1712.4 ... 1752.6 MHz			1.0	2.5 %
<b>Input VSWR (TX port)</b>				
1710.0 ... 1755.0 MHz			1.6	1.9
<b>Output VSWR (ANT port)</b>				
1710.0 ... 1755.0 MHz			1.5	1.9
<b>Attenuation</b>	α			
1.0 ... 728.0 MHz		30	45	dB
728.0 ... 764.0 MHz		35	45	dB
851.0 ... 894.0 MHz		35	42	dB
1310.0 ... 1355.0 MHz		24	38	dB
1565.42 ... 1573.374MHz		40	48	dB
1573.374 ... 1577.466MHz		45	50	dB
1577.466 ... 1585.42 MHz		40	51	dB
1597.5515... 1605.886MHz		40	47	dB
1805.0 ... 1880.0 MHz		20	46	dB
1930.0 ... 1990.0 MHz		40	46	dB
@f <sub>Carrier</sub> 2112.4 ... 2152.6 MHz	α <sub>WCDMA</sub> <sup>1)</sup>	42	46	dB
2400.0 ... 2500.0 MHz		30	39	dB
2565.0 ... 2677.0 MHz		5	35	dB
3410.0 ... 3510.0 MHz		25	31	dB
5000.0 ... 5120.0 MHz		10	20	dB
5120.0 ... 5350.0 MHz		12	20	dB
5350.0 ... 5725.0 MHz		10	26	dB
5725.0 ... 5850.0 MHz		18	25	dB
5850.0 ... 6000.0 MHz		10	25	dB

<sup>1)</sup> Attenuation of WCDMA signal ("Powertransferfunction"). Please refer to annotation on page (10).

<sup>2)</sup> Error Vector Magnitude (EVM) based on definition given in 3GPP TS 25.141.

**Data Sheet**

**Characteristics for W-CDMA Band 4**

Temperature range for specification:	T = -15 °C to +80 °C
Antenna terminating impedance:	Z <sub>ANT</sub> = 50 Ω    2.6nH
RX terminating impedance:	Z <sub>RX</sub> = 100 Ω (balanced)    18nH
TX terminating impedance:	Z <sub>TX</sub> = 50 Ω

Characteristics Antenna - Rx		B8524		
		min.	typ. @ 25 °C	max.
<b>Center frequency</b>	f <sub>C</sub>		2132.5	MHz
<b>Maximum insertion attenuation</b>	α			
@f <sub>Carrier</sub> 2112.4 ... 2152.6 MHz	α <sub>WCDMA</sub> <sup>1)</sup>		1.6	2.3 dB
<b>Amplitude ripple (p-p)</b>	Δα			
@f <sub>Carrier</sub> 2112.4 ... 2152.6 MHz	Δα <sub>WCDMA</sub> <sup>1)</sup>		0.4	1.0 dB
<b>Error vector magnitude</b>	EVM <sup>2)</sup>			
@f <sub>Carrier</sub> 2112.4 ... 2152.6 MHz			1.1	2.5 %
<b>Input VSWR (RX port)</b>				
2110.0 ... 2155.0 MHz			1.5	2.0
<b>Output VSWR (ANT port)</b>				
2110.0 ... 2155.0 MHz			1.7	2.0
<b>CMRR ( S<sub>32</sub>-S<sub>42</sub> / S<sub>32</sub>+S<sub>42</sub> )</b>				
2110.0 ... 2155.0 MHz		20 <sup>3)</sup>	29	dB

<sup>1)</sup> Attenuation of WCDMA signal ("Powertransferfunction"). Please refer to annotation on page (10).

<sup>2)</sup> Error Vector Magnitude (EVM) based on definition given in 3GPP TS 25.141.

<sup>3)</sup> A combination of 10 ° phase balance and 1 dB amplitude balance corresponds to 19.6 dB CMRR.

**Data Sheet**

**Characteristics for W-CDMA Band 4**

Temperature range for specification:	T = -15 °C to +80 °C
Antenna terminating impedance:	Z <sub>ANT</sub> = 50 Ω    2.6nH
RX terminating impedance:	Z <sub>RX</sub> = 100 Ω (balanced)    18nH
TX terminating impedance:	Z <sub>TX</sub> = 50 Ω

				B8524		
Characteristics Antenna - Rx				min.	typ. @ 25 °C	max.
<b>Attenuation</b>			$\alpha$			
	1.0 ...	400.0	MHz	57	> 70	dB
	400.0 ...	1310.0	MHz	40	67	dB
	1310.0 ...	1355.0	MHz	43	65	dB
	1355.0 ...	1710.0	MHz	35	49	dB
@f <sub>Carrier</sub>	1712.4 ...	1752.6	MHz $\alpha_{\text{WCDMA}}^{1)}$	45	60	dB
	1755.0 ...	1910.0	MHz	15	53	dB
	1910.0 ...	1955.0	MHz	35	58	dB
	1955.0 ...	2025.0	MHz	15	37	dB
	2240.0 ...	2300.0	MHz	15	36	dB
	2300.0 ...	2400.0	MHz	30	46	dB
	2400.0 ...	2496.0	MHz	40	47	dB
	2496.0 ...	2690.0	MHz	40	52	dB
	2690.0 ...	3300.0	MHz	35	45	dB
	3300.0 ...	3800.0	MHz	45	51	dB
	3820.0 ...	3910.0	MHz	40	50	dB
	3910.0 ...	4220.0	MHz	35	50	dB
	4220.0 ...	4310.0	MHz	40	49	dB
	4310.0 ...	5150.0	MHz	35	47	dB
	5150.0 ...	5850.0	MHz	37	46	dB
	5850.0 ...	6000.0	MHz	35	42	dB

<sup>1)</sup> Attenuation of WCDMA signal ("Powertransferfunction"). Please refer to annotation on page (10).




**Characteristics for W-CDMA Band 4**

Temperature range for specification:	T = -15 °C to +80 °C
Antenna terminating impedance:	Z <sub>ANT</sub> = 50 Ω    2.6nH
RX terminating impedance:	Z <sub>RX</sub> = 100 Ω (balanced)    18nH
TX terminating impedance:	Z <sub>TX</sub> = 50 Ω

				<b>B8524</b>		
<b>Characteristics Tx - Rx</b>				<b>min.</b>	<b>typ. @ 25 °C</b>	<b>max.</b>
<b>Differential Mode Isolation</b>						
			α			
	1574.0 ... 1577.0	MHz		40	68	dB
@f <sub>Carrier</sub>	1712.4 ... 1752.6	MHz	α <sub>WCDMA</sub> <sup>1)</sup>	55	59	dB
@f <sub>Carrier</sub>	2112.4 ... 2152.6	MHz	α <sub>WCDMA</sub> <sup>1)</sup>	50	57	dB
	3410.0 ... 3520.0	MHz		20	60	dB
	5120.0 ... 5275.0	MHz		20	55	dB
<b>Common Mode Isolation</b>						
			α			
@f <sub>Carrier</sub>	1712.4 ... 1752.6	MHz	α <sub>WCDMA</sub> <sup>1)</sup>	46	51	dB

<sup>1)</sup> Attenuation of WCDMA signal ("Powertransferfunction"). Please refer to annotation on page (10).


**Characteristics for CDMA 1x AWS Band**

Temperature range for specification:	T = -30 °C to +85 °C
Antenna terminating impedance:	Z <sub>ANT</sub> = 50 Ω    2.6nH
RX terminating impedance:	Z <sub>RX</sub> = 100 Ω (balanced)    18nH
TX terminating impedance:	Z <sub>TX</sub> = 50 Ω

Characteristics TX - Antenna		B8524		
		min.	typ. @ 25 °C	max.
<b>Center frequency</b>	f <sub>C</sub>		1732.5	MHz
<b>Maximum insertion attenuation</b>	α			
1710.0 ... 1755.0 MHz			1.3	2.0 dB
<b>Amplitude ripple (p-p)</b>	Δα			
1710.0 ... 1755.0 MHz			0.5	1.2 dB
<b>Input VSWR (TX port)</b>				
1710.0 ... 1755.0 MHz			1.6	1.9
<b>Output VSWR (ANT port)</b>				
1710.0 ... 1755.0 MHz			1.5	1.9
<b>Attenuation</b>	α			
1.0 ... 728.0 MHz		30	45	dB
728.0 ... 764.0 MHz		35	45	dB
851.0 ... 894.0 MHz		35	42	dB
1310.0 ... 1355.0 MHz		24	38	dB
1565.42 ... 1573.374MHz		40	48	dB
1573.374 ... 1577.466MHz		45	50	dB
1577.466 ... 1585.42 MHz		40	51	dB
1597.5515... 1605.886MHz		40	47	dB
1805.0 ... 1880.0 MHz		20	46	dB
1930.0 ... 1990.0 MHz		40	46	dB
2110.0 ... 2155.0 MHz		42	46	dB
2400.0 ... 2500.0 MHz		30	39	dB
2565.0 ... 2677.0 MHz		5	35	dB
3410.0 ... 3510.0 MHz		25	31	dB
5000.0 ... 5120.0 MHz		10	20	dB
5120.0 ... 5350.0 MHz		12	20	dB
5350.0 ... 5725.0 MHz		10	26	dB
5725.0 ... 5850.0 MHz		18	25	dB
5850.0 ... 6000.0 MHz		10	25	dB


**Characteristics for CDMA 1x AWS Band**

Temperature range for specification:	T = -30 °C to +85 °C
Antenna terminating impedance:	Z <sub>ANT</sub> = 50 Ω    2.6nH
RX terminating impedance:	Z <sub>RX</sub> = 100 Ω (balanced)    18nH
TX terminating impedance:	Z <sub>TX</sub> = 50 Ω

Characteristics Antenna - Rx	B8524			
	min.	typ. @ 25 °C	max.	
<b>Center frequency</b> f <sub>C</sub>		2132.5		MHz
<b>Maximum insertion attenuation</b> α				
2110.0 ... 2155.0 MHz		1.7	2.3	dB
<b>Amplitude ripple (p-p)</b> Δα				
2110.0 ... 2155.0 MHz		0.4	1.0	dB
<b>Input VSWR (RX port)</b>				
2110.0 ... 2155.0 MHz		1.5	2.0	
<b>Output VSWR (ANT port)</b>				
2110.0 ... 2155.0 MHz		1.7	2.0	
<b>CMRR</b> ( S <sub>32</sub> -S <sub>42</sub>  / S <sub>32</sub> +S <sub>42</sub>  )				
2110.0 ... 2155.0 MHz	20 <sup>1)</sup>	29		dB
<b>Attenuation</b> α				
1.0 ... 400.0 MHz	57	> 70		dB
400.0 ... 1310.0 MHz	40	67		dB
1310.0 ... 1355.0 MHz	43	65		dB
1355.0 ... 1710.0 MHz	35	49		dB
1710.0 ... 1755.0 MHz	45	60		dB
1755.0 ... 1910.0 MHz	15	53		dB
1910.0 ... 1955.0 MHz	35	58		dB
1955.0 ... 2025.0 MHz	15	37		dB
2240.0 ... 2300.0 MHz	15	36		dB
2300.0 ... 2400.0 MHz	30	46		dB
2400.0 ... 2496.0 MHz	40	47		dB
2496.0 ... 2690.0 MHz	40	52		dB
2690.0 ... 3300.0 MHz	35	45		dB
3300.0 ... 3800.0 MHz	45	51		dB
3820.0 ... 3910.0 MHz	40	50		dB
3910.0 ... 4220.0 MHz	35	50		dB
4220.0 ... 4310.0 MHz	40	49		dB
4310.0 ... 5150.0 MHz	35	47		dB
5150.0 ... 5850.0 MHz	37	46		dB
5850.0 ... 6475.0 MHz	35	42		dB

<sup>1)</sup> A combination of 10 ° phase balance and 1 dB amplitude balance corresponds to 19.6 dB CMRR.


**Characteristics for CDMA 1x AWS Band**

Temperature range for specification:	T = -30 °C to +85 °C
Antenna terminating impedance:	Z <sub>ANT</sub> = 50 Ω    2.6nH
RX terminating impedance:	Z <sub>RX</sub> = 100 Ω (balanced)    18nH
TX terminating impedance:	Z <sub>TX</sub> = 50 Ω

Characteristics Tx - Rx	B8524			
	min.	typ. @ 25 °C	max.	
<b>Differential Mode Isolation</b> α				
1574.0 ... 1577.0 MHz	40	68		dB
1710.0 ... 1755.0 MHz	55	58		dB
2110.0 ... 2155.0 MHz	50	56		dB
3410.0 ... 3520.0 MHz	20	60		dB
5120.0 ... 5275.0 MHz	20	55		dB
<b>Common Mode Isolation</b> α				
1710.0 ... 1755.0 MHz	46	51		dB


**Annotation for characteristics section**

Attenuation of WCDMA signal ("Powertransferfunction",  $\alpha_{\text{WCDMA}}$ ) is determined by

$$\int_{-\infty}^{\infty} |S_{\text{ds21}}(f)H_{\text{RRC}}(f - f_{\text{Carrier}})|^2 df$$

$f_{\text{Carrier}}$  according to 3GPP TS 25.101 (e.g. for UMTS-Passband,  $f_{\text{Carrier}}$  ranges from 882.4 MHz (lowest Tx channel) to 912.6 MHz (highest Tx channel)).  $H_{\text{RRC}}(f)$  is the transfer function of the root-raised cosine transmit pulse shaping filter according to 3GPP TS 25.101 with the following normalization:

$$\int_{-\infty}^{\infty} |H_{\text{RRC}}(f)|^2 df = 1$$


**Maximum Ratings**


Storage temperature range	$T_{\text{stg}}$	-40/+85	°C	
DC voltage	$V_{\text{DC}}$	5 <sup>1)</sup>	V	
ESD voltage	$V_{\text{ESD}}$	50 <sup>2)</sup>	V	machine model, 10 pulses
Input power at 1710.0 ... 1755.0 MHz	$P_{\text{IN}}$	29	dBm	} continuous wave 50 °C, 5.000 h
elsewhere		10	dBm	

<sup>1)</sup> 168h Damp Heat Steady State according to IEC 60068-2-67Cy


<sup>2)</sup> acc. to JESD22-A115A (machine model), 10 negative & 10 positive pulses.



**Power Transfer Function Tx-Ant:**

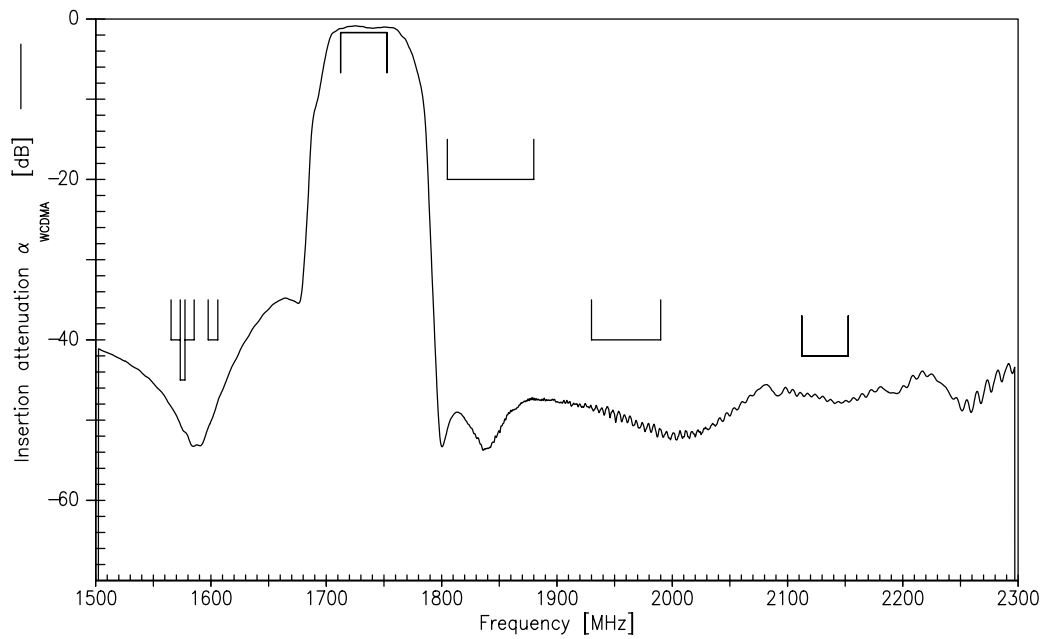


**Power Transfer Function Tx-Ant (Passband):**

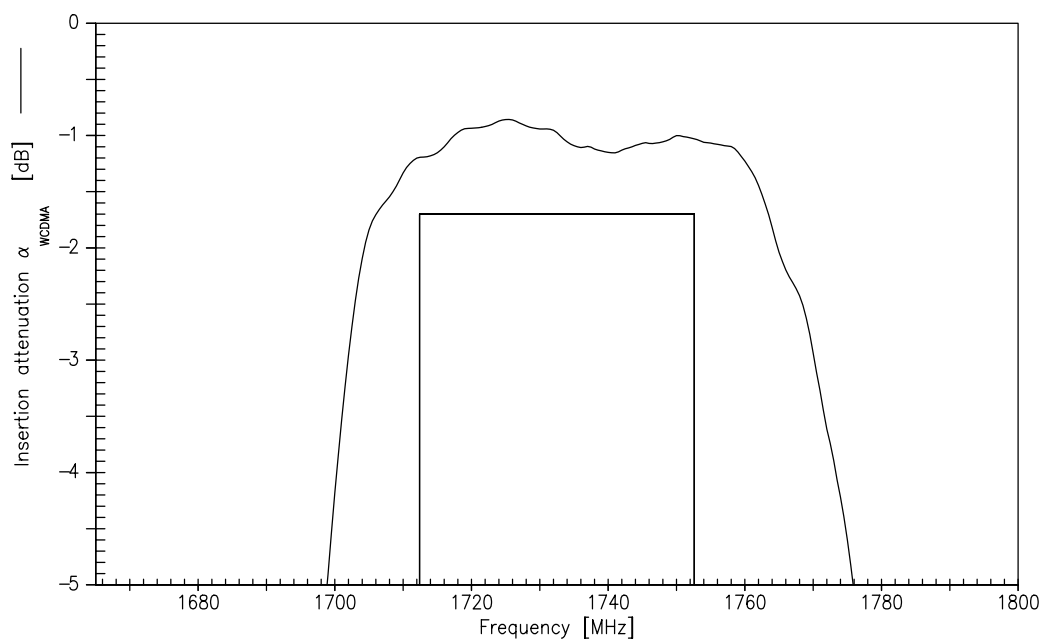




**Power Transfer Function Tx-Ant (Wideband):**

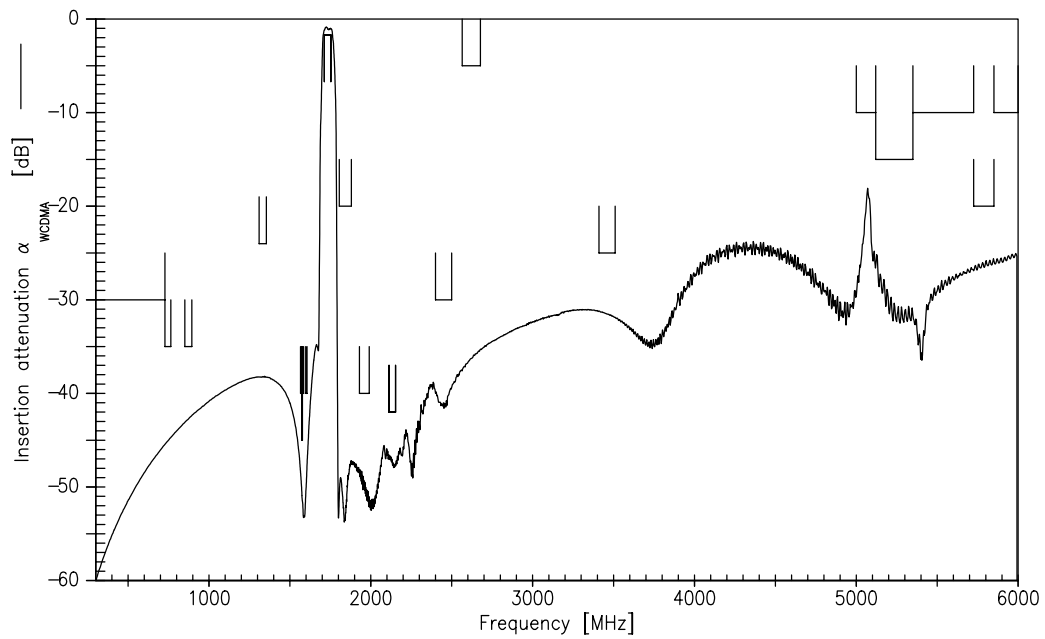


**Power Transfer Function Ant-Rx:**

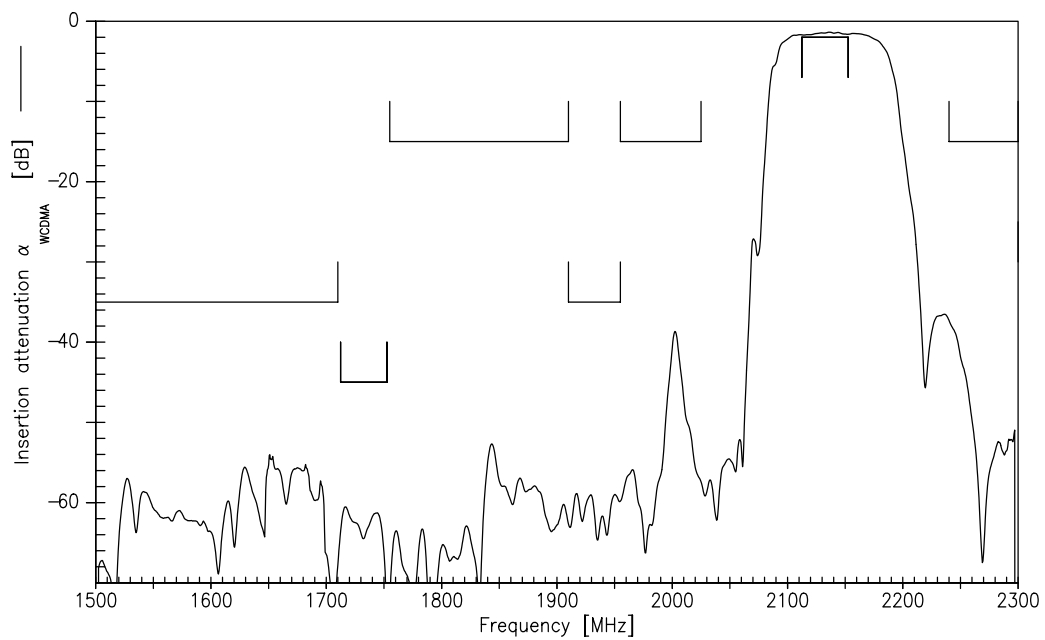






**Power Transfer Function Ant-Rx (Passband):**

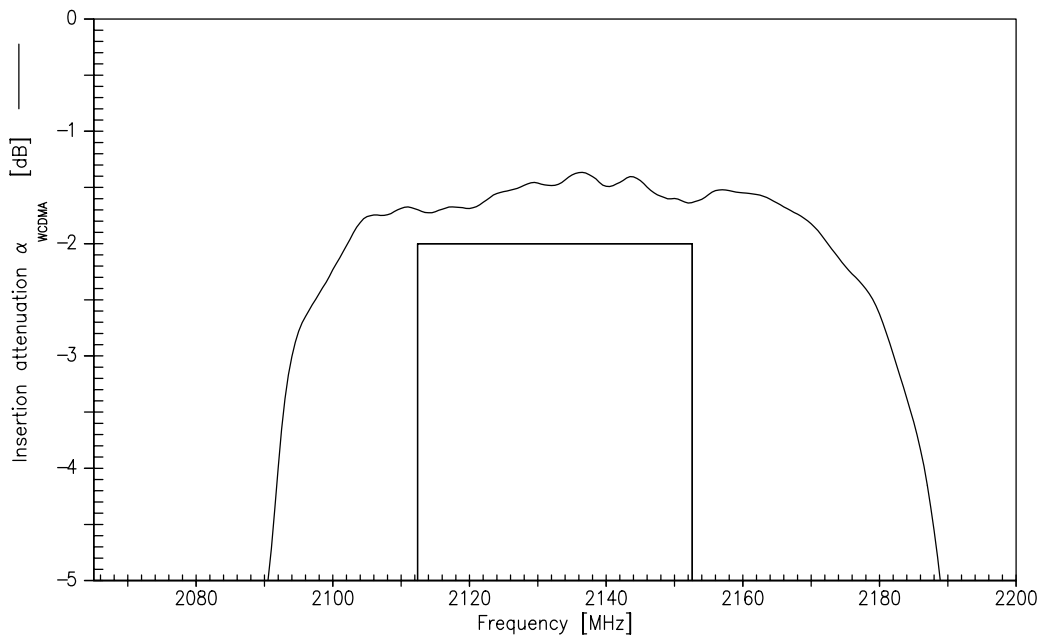


**Power Transfer Function Ant-Rx (Wideband):**

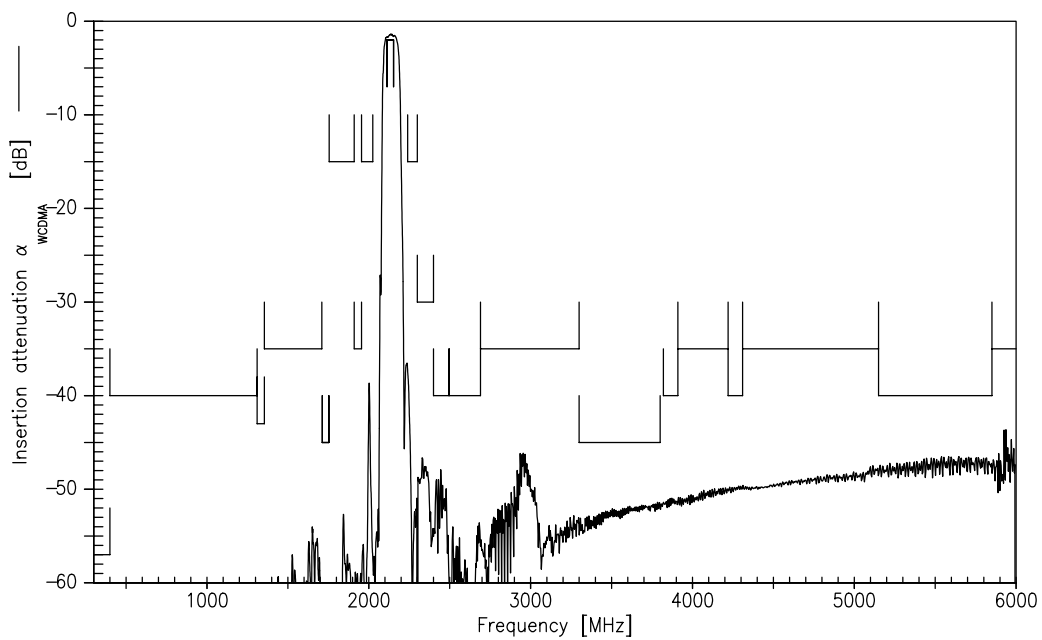


Please read *cautions and warnings* and *important notes* at the end of this document.



**Power Transfer Function Tx-Rx isolation:**

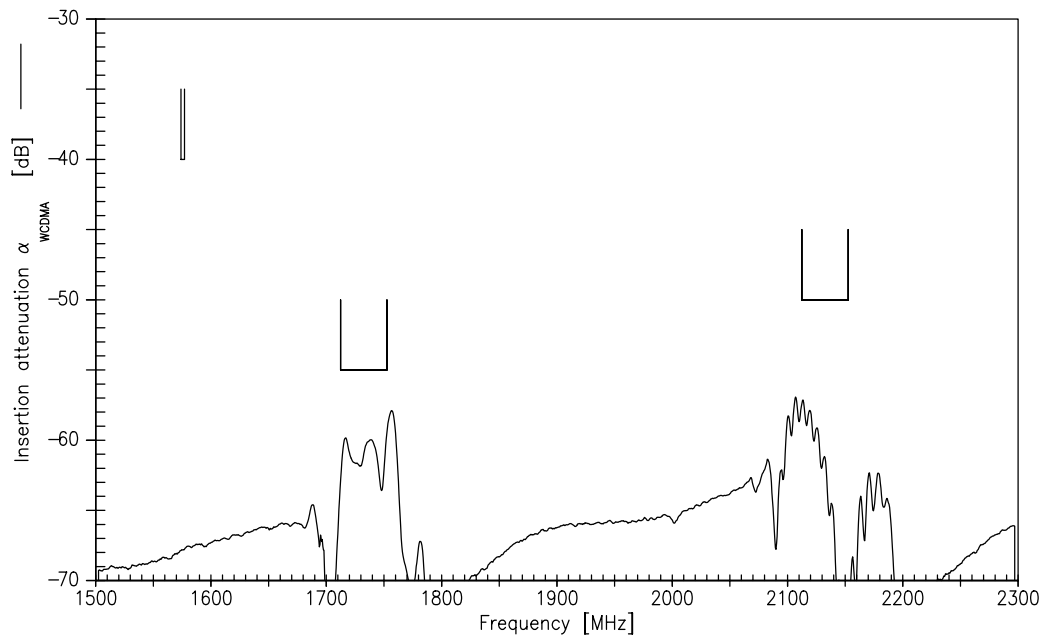




**Power Transfer Function Tx-Rx isolation (Wideband):**

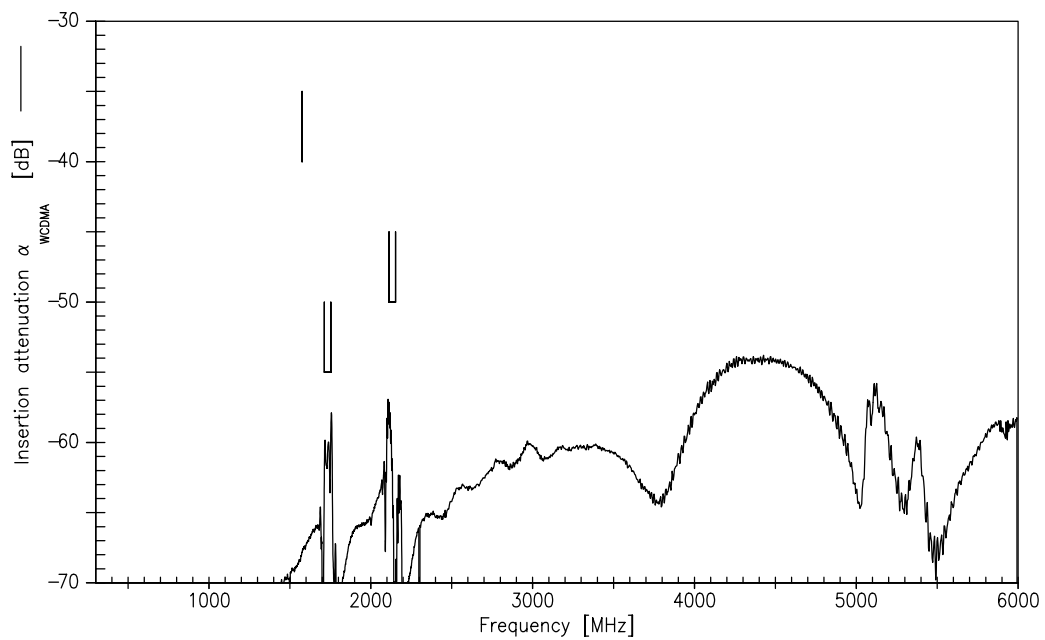

Please read *cautions and warnings* and *important notes* at the end of this document.



VSWRs at Tx, Rx and Ant:

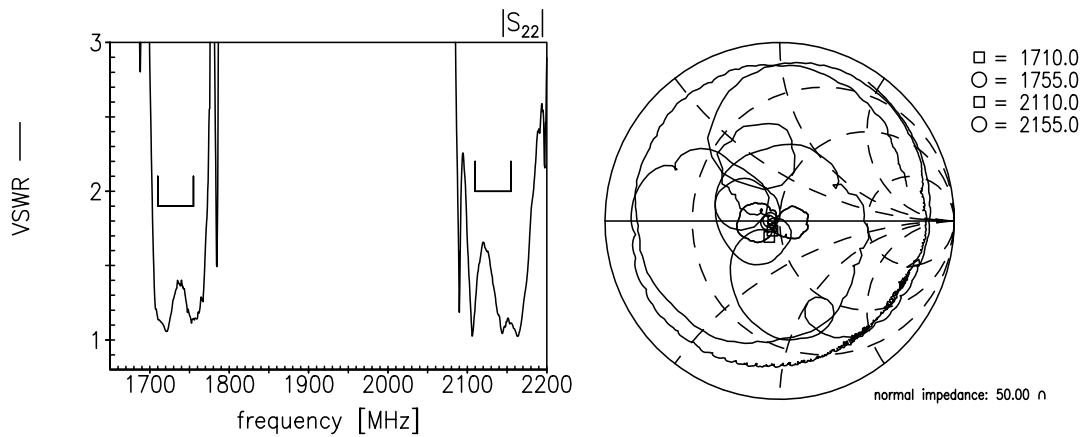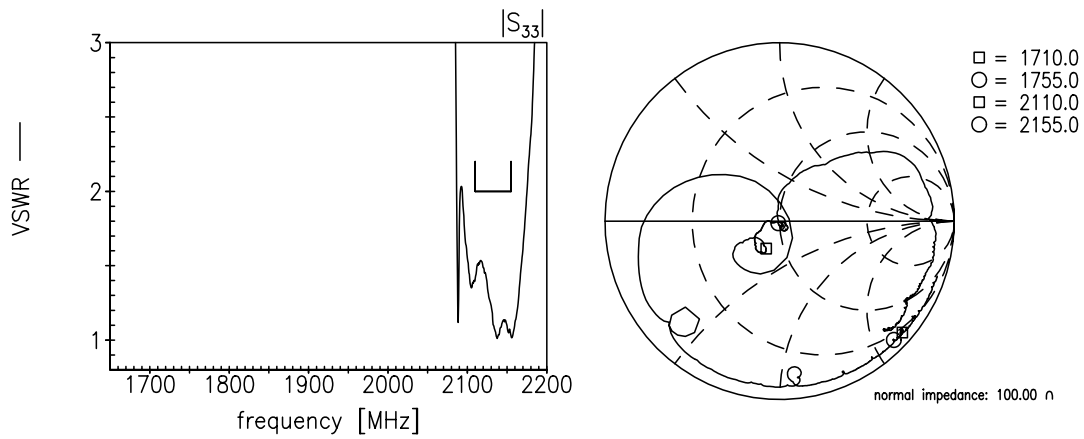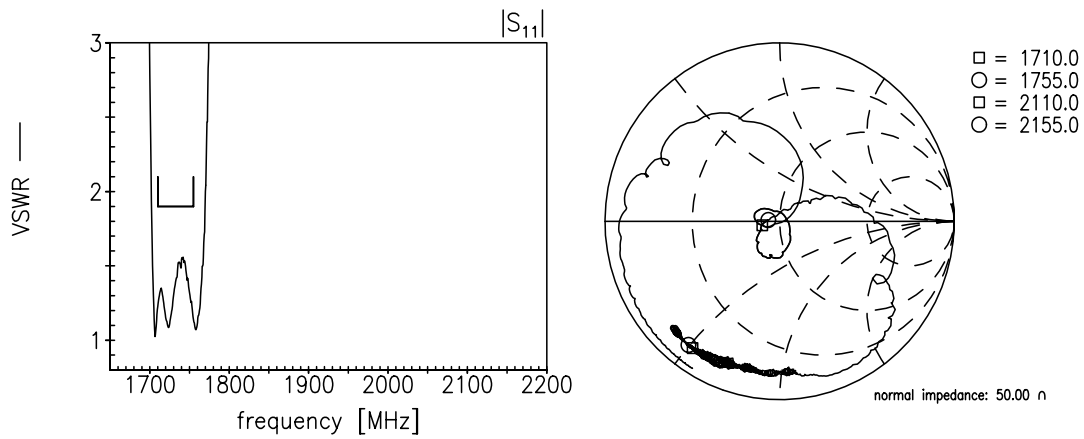


**References**

<b>Type</b>	B8524
<b>Ordering code</b>	B39212B8524P810
<b>Marking and package</b>	C61157-A8-A72-1-27
<b>Packaging</b>	F61074-V8259-Z000-2-27
<b>Date codes</b>	L_1126
<b>S-parameters</b>	B8524_NB_UN.s4p, B8524_WB_UN.s4p See file header for pin/port assignement.
<b>Soldering profile</b>	S_6001
<b>RoHS compatible</b>	defined as compatible with the following documents: "DIRECTIVE 2002/95/EC OF THE EUROPEAN PARLIAMENT AND OF THE COUNCIL of 27 January 2003 on the restriction of the use of certain hazardous substances in electrical and electronic equipment. 2005/618/EC from April 18th, 2005, amending Directive 2002/95/EC of the European Parliament and of the Council for the purposes of establishing the maximum concentration values for certain hazardous substances in electrical and electronic equipment."
<b>Moldability</b>	Before using in overmolding environment, please contact your EPCOS sales office.
<b>Matching coils</b>	See Inductor pdf-catalog <a href="http://www.tdk.co.jp/tefe02/coil.htm#aname1">http://www.tdk.co.jp/tefe02/coil.htm#aname1</a> and Data Library for circuit simulation <a href="http://www.tdk.co.jp/etvcl/index.htm">http://www.tdk.co.jp/etvcl/index.htm</a>

For further information please contact your local EPCOS sales office or visit our webpage at [www.epcos.com](http://www.epcos.com).

**Published by EPCOS AG**  
**Systems, Acoustics, Waves Business Group**  
**P.O. Box 80 17 09, 81617 Munich, GERMANY**

© EPCOS AG 2013. This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.

## Important notes

The following applies to all products named in this publication:

1. Some parts of this publication contain **statements about the suitability of our products for certain areas of application**. These statements are based on our knowledge of typical requirements that are often placed on our products in the areas of application concerned. We nevertheless expressly point out **that such statements cannot be regarded as binding statements about the suitability of our products for a particular customer application**. As a rule, EPCOS is either unfamiliar with individual customer applications or less familiar with them than the customers themselves. For these reasons, it is always ultimately incumbent on the customer to check and decide whether an EPCOS product with the properties described in the product specification is suitable for use in a particular customer application.
2. We also point out that **in individual cases, a malfunction of electronic components or failure before the end of their usual service life cannot be completely ruled out in the current state of the art, even if they are operated as specified**. In customer applications requiring a very high level of operational safety and especially in customer applications in which the malfunction or failure of an electronic component could endanger human life or health (e.g. in accident prevention or life-saving systems), it must therefore be ensured by means of suitable design of the customer application or other action taken by the customer (e.g. installation of protective circuitry or redundancy) that no injury or damage is sustained by third parties in the event of malfunction or failure of an electronic component.
3. **The warnings, cautions and product-specific notes must be observed.**
4. In order to satisfy certain technical requirements, **some of the products described in this publication may contain substances subject to restrictions in certain jurisdictions (e.g. because they are classed as hazardous)**. Useful information on this will be found in our Material Data Sheets on the Internet ([www.epcos.com/material](http://www.epcos.com/material)). Should you have any more detailed questions, please contact our sales offices.
5. We constantly strive to improve our products. Consequently, **the products described in this publication may change from time to time**. The same is true of the corresponding product specifications. Please check therefore to what extent product descriptions and specifications contained in this publication are still applicable before or when you place an order. We also **reserve the right to discontinue production and delivery of products**. Consequently, we cannot guarantee that all products named in this publication will always be available. The aforementioned does not apply in the case of individual agreements deviating from the foregoing for customer-specific products.
6. Unless otherwise agreed in individual contracts, **all orders are subject to the current version of the “General Terms of Delivery for Products and Services in the Electrical Industry” published by the German Electrical and Electronics Industry Association (ZVEI)**.
7. The trade names EPCOS, BAOKE, Alu-X, CeraDiode, CeraLink, CSMP, CSSP, CTVS, DeltaCap, DigiSiMic, DSSP, FilterCap, FormFit, MiniBlue, MiniCell, MKD, MKK, MLSC, MotorCap, PCC, PhaseCap, PhaseCube, PhaseMod, PhiCap, SIFERRIT, SIFI, SIKOREL, SilverCap, SIMDAD, SiMic, SIMID, SineFormer, SIOV, SIP5D, SIP5K, ThermoFuse, WindCap are **trademarks registered or pending** in Europe and in other countries. Further information will be found on the Internet at [www.epcos.com/trademarks](http://www.epcos.com/trademarks).