

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China










RF360 Europe GmbH

A Qualcomm - TDK Joint Venture



SAW Components

SAW Rx Filter

TETRA

Series/type: B5047

Ordering code: B39391B5047Z810

Date: December 12, 2006

Version: 2.0

RF360 products mentioned within this document are offered by RF360 Europe GmbH and other subsidiaries of RF360 Holdings Singapore Pte. Ltd. (collectively, the "RF360 Subsidiaries"). RF360 Holdings Singapore Pte. Ltd. is a joint venture of Qualcomm Global Trading Pte. Ltd. and EPCOS AG. References in this documentation to EPCOS AG should properly reference, and shall be read to reference, the RF360 Subsidiaries.

RF360 Europe GmbH, Anzinger Str. 13, München, Germany

© 2016 RF360 Europe GmbH and/or its affiliated companies. All rights reserved.

These materials, including the information contained herein, may be used only for informational purposes by the customer. The RF360 Subsidiaries assume no responsibility for errors or omissions in these materials or the information contained herein. The RF360 Subsidiaries reserve the right to make changes to the product(s) or information contained herein without notice. The materials and information are provided on an AS IS basis, and the RF360 Subsidiaries assume no liability and make no warranty or representation, either expressed or implied, with respect to the materials, or any output or results based on the use, application, or evaluation of such materials, including, without limitation, with respect to the non-infringement of trademarks, patents, copyrights or any other intellectual property rights or other rights of third parties.

No use of this documentation or any information contained herein grants any license, whether express, implied, by estoppel or otherwise, to any intellectual property rights, including, without limitation, to any patents owned by QUALCOMM Incorporated or any of its subsidiaries.

Not to be used, copied, reproduced, or modified in whole or in part, nor its contents revealed in any manner to others without the express written permission of RF360 Europe GmbH.

Qualcomm and Qualcomm RF360 are trademarks of Qualcomm Incorporated, registered in the United States and other countries. RF360 is a trademark of Qualcomm Incorporated. Other product and brand names may be trademarks or registered trademarks of their respective owners.

This technical data may be subject to U.S. and international export, re-export, or transfer ("export") laws. Diversion contrary to U.S. and international law is strictly prohibited.



SAW Components

SAW Rx Filter

Series/type: B5047

Ordering code: B39391B5047Z810

Date: December 12, 2006

Version: 2.0

EPCOS AG is a TDK Group Company.

[©] EPCOS AG 2015. Reproduction, publication and dissemination of this publication, enclosures hereto and the information contained therein without EPCOS' prior express consent is prohibited.



SAW Components B5047

SAW Rx Filter 390.0 MHz

Data Sheet




Application

- Low-loss filter for TETRA
- Usable passband 20 MHz
- Unbalanced to balanced operation
- No matching required
- lacksquare Filter impedance 50 Ω




Features

- Package size 3.8 x 3.8 x 1.5 mm³
- Package code QCC8B
- Approx. weight 0.07 g
- Ceramic package for Surface Mount Technology (SMT)
- RoHS compliant
- Ni, gold-plated
- Electrostatic Sensitive Device (ESD)

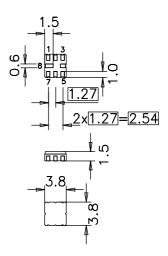

Pin configuration

- 5 Input
- 1 Output balanced
- 2 Output balanced
- 3,6,7 To be grounded
- 4,8 Case ground





SAW Components B5047

SAW Rx Filter 390.0 MHz

Data Sheet

Characteristics

 $T = -30 \text{ to } +70^{\circ}\text{C}$ Temperature range for specification: Terminating source impedance: $Z_S = 50 \Omega$

Terminating load impedance: $Z_L = 50 \Omega$ (balanced)

						min.	typ. @ 25 °C	max.	
Center frequency			f _C	_	390.0	_	MHz		
Maximum inse		ten 		MHz	α_{max}	_	3.1	5.0 ¹⁾	dB
Amplitude ripp	ple (p-p) 380.0		400.0	MHz	Δα	_	1.1	3.0 2)	dB
Input VSWR	380.0		400.0	MHz		_	2.0	2.3	
Output VSWR	380.0		400.0	MHz		_	2.1	2.3	
Attenuation					α				
	0.0		150.0	MHz		35	54	_	dB
	150.0		346.0	MHz		30	34	_	dB
	346.0		370.0	MHz		13	17	_	dB
	410.0		440.0	MHz		14	17	_	dB
	440.0		460.0	MHz		20	31	<u> </u>	dB
	460.0	•••	542.0	MHz		28	32	_	dB
	542.0	•••	563.0	MHz		35	40	_	dB
	563.0	•••	1300.0	MHz		30	34	_	dB
	1300.0	•••	1526.0	MHz		25	30	_	dB
	1526.0	•••		MHz		16	20		dB
2	2600.0		4000.0	MHz		5	28		dB
Temperature coefficient of frequency TC _f				_	-70	_	ppm/K		

^{1) 3.5} dB at 25 °C. 2) 1.5 dB at 25 °C.



SAW Components		B5047
SAW Rx Filter		390.0 MHz
Data Sheet	SMD	

Maximum ratings


Operable temperature range	Т	-40 / +85	,C	
Storage temperature range	T_{stg}	-40 / +85	°C	
DC voltage	V_{DC}	5	V	
ESD voltage	V_{ESD}	100 1)	V	machine model, 10 pulses
Input Power at				
380.0 400.0 MHz	P_{IN}	15	dBm	continuous wave

¹⁾ acc. to JESD22-A115A (machine model), 10 negative & 10 positive pulses.






Transfer function (narrowband)

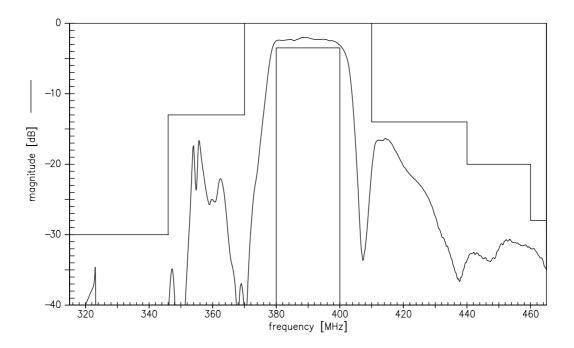

Transfer function (wideband)

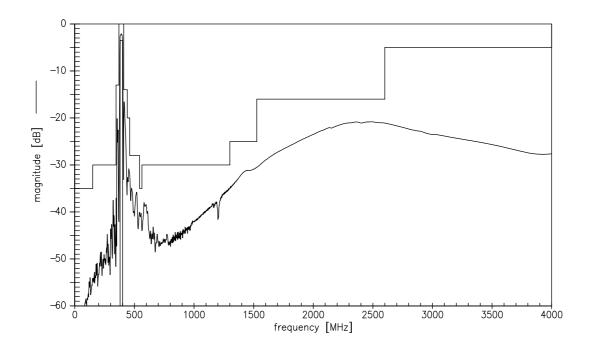





SAW Components B5047
SAW Rx Filter 390.0 MHz

Data Sheet

Smith chart S₁₁ function

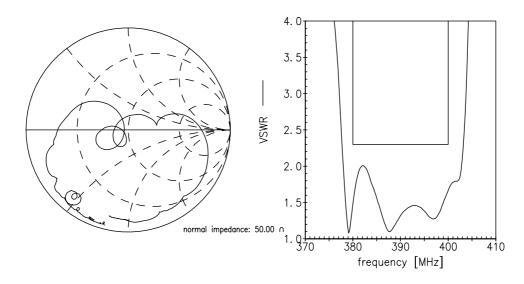

S₂₂ function

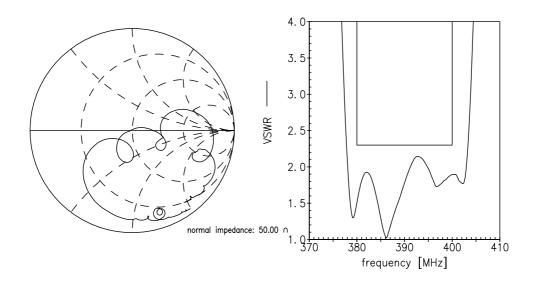



SAW Components	B5047
SAW Rx Filter	390.0 MHz
- · · · ·	

Data Sheet



References

Туре	B5047		
Ordering code	B39391B5047Z810		
Marking and package	C61157-A7-A46		
Packaging	F61074-V8167-Z000		
Date codes	L_1126		
S-parameters	B5047_NB.s3p B5047_WB.s3p		
Soldering profile	S_6001		
RoHS compatible	defined as compatible with the following documents: "DIRECTIVE 2002/95/EC OF THE EUROPEAN PARLIAMENT AND OF THE COUNCIL of 27 January 2003 on the restriction of the use of certain hazardous substances in electrical and electronic equipment. 2005/618/EC from April 18th, 2005, amending Directive 2002/95/EC of the European Parliament and of the Council for the purposes of establishing the maximum concentration values for certain hazardous substances in electrical and electronic equipment."		

For further information please contact your local EPCOS sales office or visit our webpage at www.epcos.com .

Published by EPCOS AG Surface Acoustic Wave Components Division P.O. Box 80 17 09, 81617 Munich, GERMANY

 $\ensuremath{\texttt{©}}$ EPCOS AG 2006. This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.



Important notes

The following applies to all products named in this publication:

- 1. Some parts of this publication contain statements about the suitability of our products for certain areas of application. These statements are based on our knowledge of typical requirements that are often placed on our products in the areas of application concerned. We nevertheless expressly point out that such statements cannot be regarded as binding statements about the suitability of our products for a particular customer application. As a rule, EPCOS is either unfamiliar with individual customer applications or less familiar with them than the customers themselves. For these reasons, it is always ultimately incumbent on the customer to check and decide whether an EPCOS product with the properties described in the product specification is suitable for use in a particular customer application.
- 2. We also point out that in individual cases, a malfunction of passive electronic components or failure before the end of their usual service life cannot be completely ruled out in the current state of the art, even if they are operated as specified. In customer applications requiring a very high level of operational safety and especially in customer applications in which the malfunction or failure of a passive electronic component could endanger human life or health (e.g. in accident prevention or life-saving systems), it must therefore be ensured by means of suitable design of the customer application or other action taken by the customer (e.g. installation of protective circuitry or redundancy) that no injury or damage is sustained by third parties in the event of malfunction or failure of a passive electronic component.
- 3. The warnings, cautions and product-specific notes must be observed.
- 4. In order to satisfy certain technical requirements, some of the products described in this publication may contain substances subject to restrictions in certain jurisdictions (e.g. because they are classed as "hazardous"). Useful information on this will be found in our Material Data Sheets on the Internet (www.epcos.com/material). Should you have any more detailed questions, please contact our sales offices.
- 5. We constantly strive to improve our products. Consequently, the products described in this publication may change from time to time. The same is true of the corresponding product specifications. Please check therefore to what extent product descriptions and specifications contained in this publication are still applicable before or when you place an order. We also reserve the right to discontinue production and delivery of products. Consequently, we cannot guarantee that all products named in this publication will always be available.
- Unless otherwise agreed in individual contracts, all orders are subject to the current version of the "General Terms of Delivery for Products and Services in the Electrical Industry" published by the German Electrical and Electronics Industry Association (ZVEI).
- The trade names EPCOS, CeraDiode, CSSP, PhaseCap, PhaseMod, SIFI, SIKOREL, Silver-Cap, SIMID, SIOV, SIP5D, SIP5K, TOPcap, UltraCap, WindCap are trademarks registered or pending in Europe and in other countries. Further information will be found on the Internet at www.epcos.com/trademarks.