



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





Siemens Matsushita Components

# Ferrites and Accessories

Ring Cores

Ring cores with the new blue epoxy coating from Siemens Matsushita Components

Ring cores are firmly established in a large variety of advanced equipment and systems in electrical and electronic engineering. In telecommunications they are found in interface transformers for ISDN applications and in chokes for data and signal lines. EMC solutions with input and output chokes in switch-mode power supplies are just as dependent on ring cores as the filters of frequency converters used in electric drives for traction applications and elevators. Lighting engineering needs them too – ring cores in drive transformers for power transistors in electronic ballasts have long been state of the art.

### **Core point: benefits that pay off**

Ring cores offer exceptional advantages compared to other types of core, advantages that are indispensable for special requirements. They include in particular high inductance for small space needs, low parasitic capacitance and – because of the smaller number of turns – the low ohmic resistance of chokes and transformers. A further benefit is that ring cores have low magnetic leakage.

### **New: coating made to measure**

We offer a wide selection of uncoated and coated ring cores. The type of coating depends on the materials used in different size categories. We work with the following variants: parylene (Galxyl) is used for small diameter (< 10 mm) ring cores, polyamide is the material for ring core diameters from 4 to 30 mm.

For ring cores of larger diameters and those of high-permeability materials (e.g. T46), we have a new development called *blue epoxy coating*. This is an electrostatically deposited powder coating exhibiting decisive advantages compared to conventional polyamide coating:

- No drop in  $A_L$  unlike uncoated cores of high-permeability materials (T38 and T46)
- Much higher voltage strength
- Noticeably higher mechanical strength
- Substantially higher temperature resistance (up to 200 °C)

In future we will make general use of the advantages of epoxy coating for all cores  $\geq 30$  mm in diameter. It will also be offered as a special coating for cores of other diameters.


For further information contact the Siemens office near you or write us at  
Siemens Matsushita Components GmbH & Co. KG  
Marketing Kommunikation  
Postfach 801709  
D-81617 München  
Internet: <http://www.siemens.de/pr/index.htm>

## Ring Cores

- Our product line includes a wide range of ring cores with finely graded diameters ranging from 2,5 to 200 mm (see overview of available types). Other core heights can be supplied on request. All cores are available in the usual materials.

Ring cores are available in different coating versions, thus offering the appropriate solution for every application. The coating not only offers protection for the edges but also provides an insulation function.

The following test setup is used to test the dielectric strength of the insulating coating: A copper ring is pressed to the top edge of the ring. It touches the ferrite ring at the edges (see diagram). The test duration is 2 seconds; the test voltages specified in the table are minimum values:

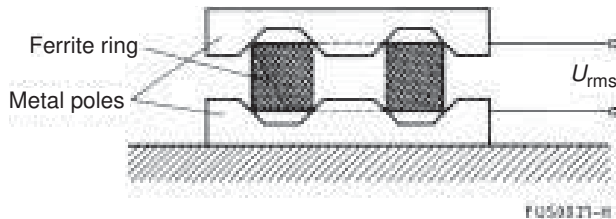

Core size	$U_{rms}$
R 4 thru R 10	1,0 kV
R 12,5 thru R 20	1,5 kV
> R 20	2,0 kV

For cores with high permeability, increased spread of the  $A_L$  values of several percent must be expected due to the polyamide coating (K version). This effect can be avoided by using an epoxy resin coating (L version).

For small ring cores, we have introduced a parylene coating (Galxyl) which features a low coating thickness and high dielectric strength.

- Ring cores are used primarily for pulse and broadband transformers, baluns and chokes. Owing to the magnetically closed circuit, high flux densities can be achieved at small volume. Magnetic leakage is negligible.
- Ring cores are also increasingly used for power applications. Here, the typical values for amplitude permeability and power loss, as summarized in the section on SIFERRIT materials (Data Book "Ferrites and Accessories", 1997), are applicable to the special power materials.
- In the list of preferred types, the  $A_{L1min}$  value (measurement conditions 320 mT, 100 °C, 10 kHz) is also specified for power applications, in addition to a limiting value for power loss under the relevant measurement conditions. This provides a guarantee of the minimum amplitude permeability.
- Characteristic data for cores not included among the preferred types are available on request.

### Versions

Version	Ordering code
● Uncoated	B64290-A...
● Coated with polyamide; thickness of coating approx. 0,2 to 0,4 mm	B64290-K...
● Coated with parylene; thickness of coating approx. 10 to 15 $\mu\text{m}$ , standard coating for small cores ( $\leq R 4$ )	B64290-P...
● Coated with epoxy resin; thickness of coating approx. 0,15 to 0,3 mm, coating for cores $\geq R 30$	B64290-L...



## Application: Ring cores to suppress line interference

With the ever-increasing use of electrical and electronic equipment, it becomes increasingly important to be able to ensure that all facilities will operate simultaneously in the context of electromagnetic compatibility (EMC) without interfering with each others' respective functions. The EMC legislation which came into force at the beginning of 1996 applies to all electrical and electronic products marketed in the EU, both new and existing ones. So the latter may have to be modified so that they are neither susceptible to electromagnetic interference, nor emit spurious radiation. Ferrite cores are ideally suited for this purpose since they are able to suppress interference over a wide frequency range.

At frequencies above 1 MHz, ferrite rings slipped over a conductor lead to an increase in the impedance of this conductor. The real component of this impedance absorbs the interference energy.

A ferrite material's suitability for suppressing interference within a specific frequency spectrum depends on its magnetic properties, which vary with frequency. Before the right material can be selected, the impedance  $|Z|$  must be known as a function of frequency.

The curve of impedance as a function frequency is characterized by the sharp increase in loss at resonance frequency.

### Measurement results:

The measurements shown here were made at room temperature ( $23 \pm 3 \text{ }^\circ\text{C}$ ) using an HP 4191A RF impedance analyzer with a flux density of  $B \leq 1 \text{ mT}$ .

The maximum of the impedance curve shifts to lower frequencies as the number of turns increases; this is due to the capacitive effect of the turns (figure 1, using R25/15 as an example).

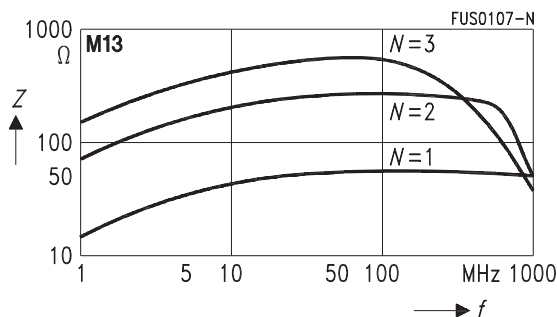


Figure 1

For direct comparison of the typical suppression characteristics of different ferrite materials, the impedance curves were normalized using the equation  $|Z|_n = |Z| / N^2 \times \Sigma (l_e / A_e)$ ; the geometry factor was calculated on the basis of the core dimensions (figure 2).

These normalized impedance curves are guide values, mostly measured using ring core R 10 with a number of turns  $N = 1$  (wire diameter 0,7 mm); they may vary slightly, depending on the geometry.

# Ring Cores

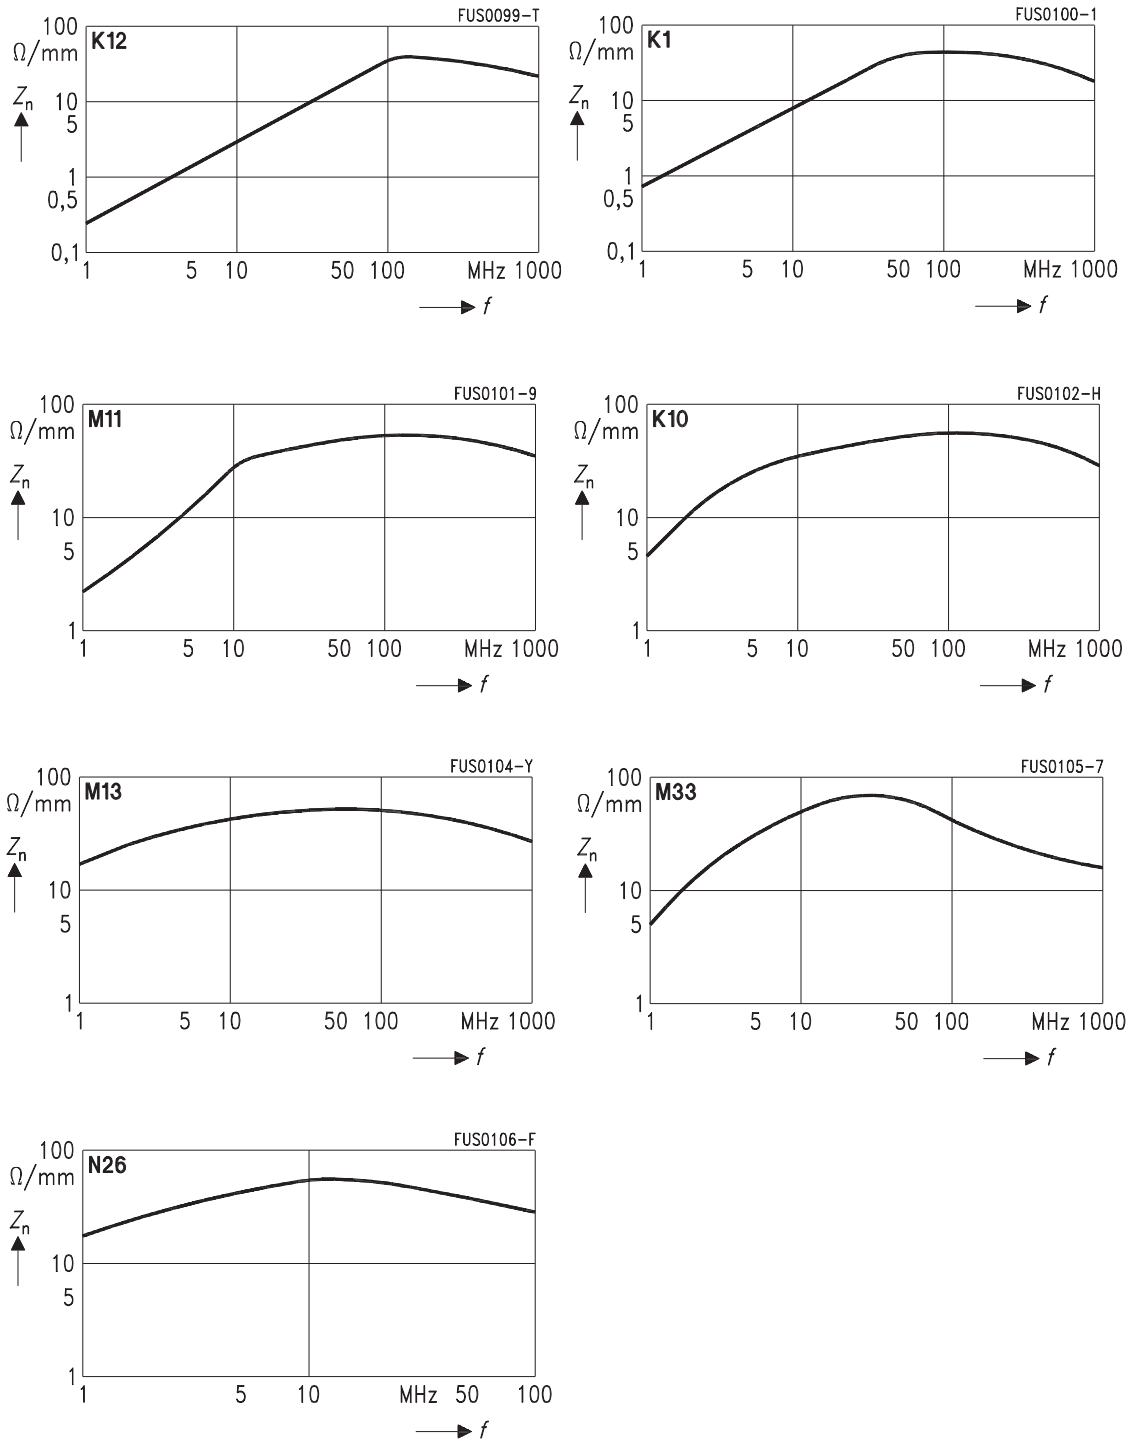


Figure 2

Ring cores are also available in split versions, which can easily be clipped onto cables. The residual air gap inevitable in the reassembled ferrite ring affects its impedance characteristic only slightly in the upper frequency range (figure 3, using R25/15 as an example).

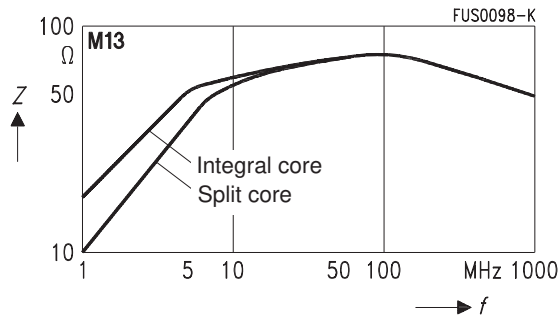


Figure 3

The residual air gap has a positive effect on performance with dc biasing because magnetic saturation is not reached until higher signal levels (figure 4, using R25/15 as an example).


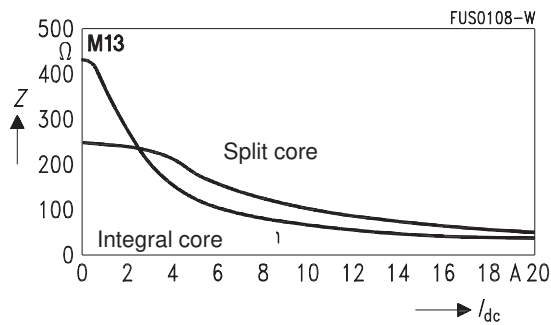


Figure 4



## Ring Cores



### Overview of available types

Type	Dimensions			Magnetic characteristics				Approx. weight g
	$d_a^{1)}$ mm	$d_i^{1)}$ mm	$h^{1)}$ mm	$\Sigma l/A$ $\text{mm}^{-1}$	$l_e$ mm	$A_e$ $\text{mm}^2$	$V_e$ $\text{mm}^3$	
R 2,5	$2,5 \pm 0,12$	$1,5 \pm 0,1$	$1,0 \pm 0,1$	12,30	6,02	0,49	3,0	0,02
R 3,0	$3,05 \pm 0,2$	$1,27 \pm 0,2$	$1,27 \pm 0,2$	5,65	5,99	1,06	6,4	0,04
R 3,9	$3,94 \pm 0,12$	$2,24 \pm 0,12$	$1,3 \pm 0,12$	8,56	9,21	1,08	9,9	0,05
R 3,9/2	$3,94 \pm 0,12$	$2,24 \pm 0,12$	$2,0 \pm 0,12$	5,56	9,21	1,66	15,3	0,07
R 4,0	$4,0 \pm 0,12$ (4,5 max)	$2,4 \pm 0,12$ (1,9 min)	$1,6 \pm 0,1$ (2,1 max)	7,69	9,63	1,25	12,0	0,06
R 5,8	$5,84 \pm 0,12$ (6,36 max)	$3,05 \pm 0,12$ (2,53 min)	$1,52 \pm 0,12$ (2,05 max)	6,36	13,03	2,05	26,7	0,1
R 5,8/3	$5,84 \pm 0,12$ (6,36 max)	$3,05 \pm 0,12$ (2,53 min)	$3,0 \pm 0,12$ (3,55 max)	3,22	13,03	4,04	52,6	0,3
R 6,3	$6,3 \pm 0,15$ (7,25 max)	$3,8 \pm 0,12$ (2,85 min)	$2,5 \pm 0,12$ (3,4 max)	4,97	15,21	3,06	46,5	0,2
R 9,5/2	$9,53 \pm 0,19$ (10,5 max)	$4,75 \pm 0,12$ (3,8 min)	$2,0 \pm 0,1$ (2,9 max)	4,51	20,72	4,59	95,1	0,5
R 9,5	$9,53 \pm 0,19$ (10,5 max)	$4,75 \pm 0,12$ (3,8 min)	$3,17 \pm 0,15$ (4,1 max)	2,85	20,72	7,28	151	0,8
R 10	$10,0 \pm 0,2$ (11,0 max)	$6,0 \pm 0,15$ (5,05 min)	$4,0 \pm 0,15$ (4,95 max)	3,07	24,07	7,83	188	0,9
R 12,5	$12,5 \pm 0,3$ (13,6 max)	$7,5 \pm 0,2$ (6,5 min)	$5,0 \pm 0,15$ (5,95 max)	2,46	30,09	12,23	368	1,8
R 13,3	$13,3 \pm 0,3$ (14,4 max)	$8,3 \pm 0,3$ (7,2 min)	$5,0 \pm 0,15$ (5,95 max)	2,67	32,70	12,27	401	1,8
R 14	$14,0 \pm 0,3$ (15,1 max)	$9,0 \pm 0,25$ (7,95 min)	$5,0 \pm 0,2$ (6,0 max)	2,84	34,98	12,30	430	2,0
R 15	$15,0 \pm 0,5$ (16,3 max)	$10,4 \pm 0,4$ (9,2 min)	$5,3 \pm 0,3$ (6,4 max)	3,24	39,02	12,05	470	2,4

1) Values in parentheses apply to coated cores, ring cores made of NiZn ferrite may exceed the specified dimensions by up to 5 %

Type	Dimensions			Magnetic characteristics				Approx. weight g
	$d_a^{1)}$ mm	$d_i^{1)}$ mm	$h^{1)}$ mm	$\Sigma l/A$ $\text{mm}^{-1}$	$l_e$ mm	$A_e$ $\text{mm}^2$	$V_e$ $\text{mm}^3$	
R 16	16,0 ± 0,4 (17,2 max)	9,6 ± 0,3 (8,5 min)	6,3 ± 0,2 (7,3 max)	1,95	38,52	19,73	760	3,7
R 17	17,0 ± 0,4 (18,2 max)	10,7 ± 0,3 (9,6 min)	6,8 ± 0,2 (7,8 max)	2,00	42,0	21,04	884	4,4
R 20/7	20,0 ± 0,4 (21,2 max)	10,0 ± 0,25 (8,7 min)	7,0 ± 0,4 (8,2 max)	1,30	43,55	33,63	1465	7,6
R 22	22,1 ± 0,4 (23,3 max)	13,7 ± 0,3 (12,6 min)	6,35 ± 0,3 (7,4 max)	2,07	54,15	26,17	1417	6,8
R23/8	22,6 ± 0,4 (23,8 max)	14,7 ± 0,2 (13,7 min)	7,6 ± 0,2 (8,6 max)	1,92	56,82	29,56	1680	8,1
R23/9	22,6 ± 0,4 (23,8 max)	14,7 ± 0,2 (13,7 min)	9,2 ± 0,2 (10,2 max)	1,59	56,82	35,78	2033	9,8
R 25/10	25,3 ± 0,7 (26,8 max)	14,8 ± 0,5 (13,5 min)	10,0 ± 0,2 (11,0 max)	1,17	60,07	51,26	3079	16
R 25/15	25,3 ± 0,7 (26,8 max)	14,8 ± 0,5 (13,5 min)	15,0 ± 0,4 (16,2 max)	0,78	60,07	76,89	4619	24
R 25/20	25,3 ± 0,7 (26,8 max)	14,8 ± 0,5 (13,5 min)	20,0 ± 0,5 (21,3 max)	0,59	60,07	102,5	6157	33
R 29	29,5 ± 0,7 (31,0 max)	19,0 ± 0,5 17,7 min	14,9 ± 0,4 (16,1 max)	0,96	73,78	76,98	5680	27
R 30	30,5 ± 1,0 (32,3 max)	20,0 ± 0,6 (18,2 min)	12,5 ± 0,4 (13,7 max)	1,19	77,02	64,66	4980	25
R 34/10	34,0 ± 0,7 (35,5 max)	20,5 ± 0,5 (19,2 min)	10,0 ± 0,3 (11,1 max)	1,24	82,06	66,08	5423	27
R 34/12,5	34,0 ± 0,7 (35,5 max)	20,5 ± 0,5 (19,2 min)	12,5 ± 0,3 (13,6 max)	0,99	82,06	82,60	6778	33
R 36	36,0 ± 0,7 (37,5 max)	23,0 ± 0,5 (21,7 min)	15,0 ± 0,4 (16,2 max)	0,94	89,65	95,89	8597	43
R 40	40,0 ± 1,0 (41,8 max)	24,0 ± 0,7 (22,5 min)	16,0 ± 0,4 (17,2 max)	0,77	96,29	125,3	12070	61
R 42	41,8 ± 1,0 (43,6 max)	26,2 ± 0,6 (24,8 min)	12,5 ± 0,3 (13,6 max)	1,08	103,0	95,75	9862	48
R 50	50,0 ± 1,0 (51,8 max)	30,0 ± 0,7 (28,5 min)	20,0 ± 0,5 (21,3 max)	0,62	120,4	195,7	23560	118
R 58	58,3 ± 1,0 (60,1 max)	40,8 ± 0,8 (39,2 min)	17,6 ± 0,4 (18,8 max)	1,00	152,4	152,4	23230	115

1) Values in parentheses apply to coated cores, ring cores made of NiZn ferrite may exceed the specified dimensions by up to 5 %

## Ring Cores

Type	Dimensions			Magnetic characteristics				Approx. weight g
	$d_a^{1)}$ mm	$d_i^{1)}$ mm	$h^{1)}$ mm	$\Sigma l/A$ $\text{mm}^{-1}$	$l_e$ mm	$A_e$ $\text{mm}^2$	$V_e$ $\text{mm}^3$	
R 100	$102,0 \pm 2,0$ (104,8 max)	$65,8 \pm 1,3$ (63,7 min)	$15,0 \pm 0,5$ (16,3 max)	0,96	255,3	267,2	68220	330
R 140	$140,0 \pm 3,0$ (143,8 max)	$103,0 \pm 2,0$ (100,2 min)	$25,0 \pm 1,0$ (26,8 max)	0,82	375,8	458,9	172440	860
R 200	$202,0 \pm 4,0$ (206,8 max)	$153,0 \pm 3,0$ (149,2 min)	$25,0 \pm 1,0$ (26,8 max)	0,90	550,5	608,6	335030	1600

1) Values in parentheses apply to coated cores, ring cores made of NiZn ferrite may exceed the specified dimensions by up to 5 %

## Preferred types <sup>1)</sup>

Type	Material	$A_L$ value nH (1mT, 10 kHz, 25°C)	$A_{L1min}$ nH (320 mT, N49: 200 mT, 10 kHz, 100 °C)	Power loss per core (measurement conditions)	Ordering code  B64290-	PU  Pcs
R 2,5	N 30 T 38 T 38	440 ± 25% 1020 ± 30% 1020 +30/-40%			-P35-X830 -A35-X38 -P35-X38	40000
R 4	K 1 M 33 N 30 T 38 T 38 T46	13 ± 25% 123 ± 25% 700 ± 25% 1630 ± 30% 1630 +30/-40% 2450 +30/-30%			-A36-X1 -A36-X33 -K36-X830 -A36-X38 -P36-X38 -A36-X46	16000
R 6,3	K 1 M 33 N 49 <sup>2)</sup>  N 30 N 30 T38 T38	20 ± 25% 190 ± 25% 330 ± 25%  1090 ± 25% 1090 ± 25% 2530 ± 30% 2530 +30/-40%	250	< 6 mW (50 mT/500 kHz/100°C)	-A37-X1 -K37-X33 -K37-X49  -A37-X830 -K37-X830 -A37-X38 -K37-X38	4000
R 9,5 / 2	T46	4180 ± 30%			-A681-X46	
R 10	K1 M33 N49 <sup>2)</sup>  N30 N30 T38	33 ± 25% 308 ± 25% 530 ± 25%  1760 ± 25% 1760 ± 25% 4090 +30/-40%	410	< 23 mW (50 mT/500 kHz/100°C)	-A38-X1 -K38-X33 -K38-X49  -A38-X830 -K38-X830 -K38-X38	1000 3000 3000  1000 3000 3000
R 12,5	N 49 <sup>2)</sup>  N27  N 67  N30 N30 T 35 T 35	660 ± 25%  1020 ± 25%  1070 ± 25%  2200 ± 25% 2200 ± 25% 3060 ± 25% 3060 +25/-30%	510  460  460	< 45 mW (50 mT/500 kHz/100°C)  < 70 mW (200 mT/25 kHz/100°C)  < 280 mW (200 mT/100 kHz/100°C)	-K44-X49  -K44-X27  -K44-X67  -A44-X830 -K44-X830 -A44-X35 -K44-X35	1500  1500  1500  500 1500 500 1500

## Ring Cores

Type	Material	$A_L$ value nH (1mT, 10 kHz, 25°C)	$A_{L1min}$ nH (320 mT, N49: 200 mT, 10 kHz, 100 °C)	Power loss per core (measurement conditions)	Ordering code	PU
					B64290-	Pcs

1) The preferred core types are available at short notice. Other cores on request.

2) Preliminary data

R 16	N 49 <sup>1)</sup>	840 ± 25%	640	< 95 mW (50 mT/500 kHz/100°C) < 140 mW (200 mT/25 kHz/100°C) < 500 mW (200 mT/100 kHz/100°C)	-K45-X49	2000
	N27	1290 ± 25%	580		-K45-X27	2000
	N67	1350 ± 25%	580		-K45-X67	2000
	N30	2770 ± 25%			-K45-X830	2000
	T35	3870 ± 25%			-A45-X35	1000
	T35	3870 +25/-30%			-K45-X35	2000
	T38	6440 ± 30%			-A45-X38	1000
	T38	6440 +30/-40%			-K45-X38	2000
R 20/7	N 27	1930 ± 25%	870	< 280 mW (200 mT/25 kHz/100°C) < 1,2 W (200 mT/100 kHz/100°C)	-K632-X27	1000
	N 67	2030 ± 25%	870		-K632-X67	1000
	N 30	4160 ± 25%			-A632-X830	500
	N 30	4160 ± 25%			-K632-X830	1000
	T 35	5000 ± 25%			-A632-X35	500
	T 35	5000 +25/-30%			-K632-X35	1000
	T 38	8500 +30/-40%			-K632-X38	1000
R 22	N 27	1210 ± 25%	550	< 250 mW (200 mT/25 kHz/100°C)	-K638-X27	300
	N30	2610 ± 25%			-K638-X830	300
	T 35	3200 ± 25%			-A638-X35	500
	T 35	3200 +25/-30%			-K638-X35	300
R 25/10	N 27	2150 ± 25%	970	< 580 mW (200 mT/25 kHz/100°C) < 2,4 W (200 mT/100 kHz/100°C)	-K618-X27	500
	N 67	2260 ± 25%	970		-K618-X67	500
	N 30	4620 ± 25%			-A618-X830	400
	N 30	4620 ± 25%			-K618-X830	500
	T 35	5400 ± 25%			-A618-X35	400
	T 35	5400 +25/-30%			-K618-X35	500
R 34/10	N 30	4360 ± 25%			-L58-X830	225
R 34/12,5	N 30	5460 ± 25%			-L48-X830	225

Type	Material	$A_L$ value nH (1mT, 10 kHz, 25°C)	$A_{L1min}$ nH (320 mT, N49: 200 mT, 10 kHz, 100 °C)	Power loss per core (measurement conditions)	Ordering code	PU
					B64290-	Pcs

1) Preliminary data

R 36	N 27	2670 ± 25%	1200	< 1,6 W (200 mT/25 kHz/100°C) < 5,9 W (200 mT/100 kHz/100°C)	-L674-X27	200
	N 67	2810 ± 25%	1200		-L674-X67	
	N 30	5750 ± 25%			-A674-X830	
	N 30	5750 ± 25%			-L674-X830	
R 40	N 30	7000 ± 25%			-A659-X830	80
	N 30	7000 ± 25%			-L659-X830	
R 42	N 30	5000 ± 25%			-A22-X830	192
	N 30	5000 ± 25%			-L22-X830	
R 50	N 30	8700 ± 25%			-A82-X830	64
	N 30	8700 ± 25%			-L82-X830	
R 58	N 30	5400 ± 25%			-L40-X830	90
R 100	N 30	5500 ± 25%			-A84-X830	24
R 140	N 30	6200 ± 25%			-A705-X830	4
R 200	N 30	5500 ± 30%			-A711-X830	2



**Published by Siemens Matsushita Components GmbH & Co. KG  
Marketing Kommunikation, Postfach 80 17 09, D-81617 München**

© Siemens Matsushita Components 1997. All Rights Reserved.

As far as patents or other rights of third parties are concerned, liability is only assumed for components per se, not for applications, processes and circuits implemented within components or assemblies.

The information describes the type of component and shall not be considered as assured characteristics.

Terms of delivery and rights to change design reserved.

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of Siemens AG, Passive Components and Electron Tubes Group, in the Federal Republic of Germany or the international Siemens Companies and Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.