

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



# Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China













# Ultra Low Profile 0805 Balun 50Ω to 100Ω Balanced

#### Description

The BD2425J50100AHF is a low profile sub-miniature balanced to unbalanced transformer designed for differential inputs and output locations on next generation wireless chipsets in an easy to use surface mount package covering 802.11b+g+n. The BD2425J50100AHF is ideal for high volume manufacturing and is higher performance than traditional ceramic and lumped element baluns. The BD2425J50100AHF has an unbalanced port impedance of  $50\Omega$  and a  $100\Omega$ balanced port impedance. This transformation enables single ended signals to be applied to differential ports on modern semiconductors. The output ports have equal amplitude (-3dB) with 180 degree phase differential. The BD2425J50100AHF is available on tape and reel for pick and place high volume manufacturing.

**Detailed Electrical Specifications:** Specifications subject to change without notice.


#### Features:

- 2400 2500 MHz
- 0.7mm Height Profile
- 50 Ohm to 2 x 50 Ohm
- 802.11 b+g +n Compliant
- **Low Insertion Loss**
- Input to Output DC Isolation
- **Surface Mountable**
- Tape & Reel
- **Non-conductive Surface**
- **RoHS Compliant**
- **Halogen Free**

	ROOM (25°C)			
Parameter	Min.	Тур.	Max	Unit
Frequency	2400		2500	MHz
Unbalanced Port Impedance		50		Ω
Balanced Port Impedance	_	100	_	Ω
Return Loss	14	22		dB
Insertion Loss*		0.55	0.75	dB
Amplitude Balance		0.3	0.5	dB
Phase Balance		2	5	Degrees
CMRR	_	33	_	dB
Power Handling			2	Watts
Operating Temperature	-55		+85	°C

<sup>\*</sup> Insertion Loss stated at room temperature (Insertion Loss is approximately 0.1 dB higher at +85 °C)

#### **Outline Drawing**

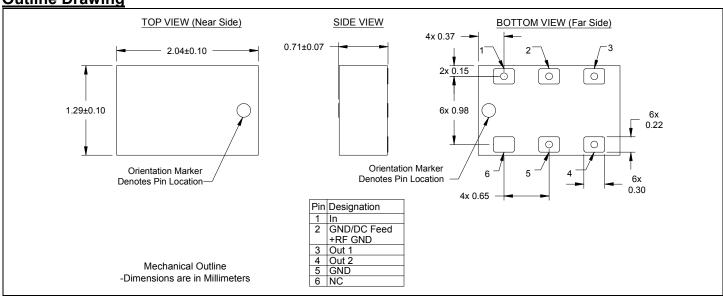





Visit us at www.anaren.com USA/Canada: (315) 432-8909 Toll Free: (800) 411-6596 +44 2392-232392 Europe: +86 512-62749282 Asia:








# Typical Broadband Performance: 500 MHz. to 8500 MHz.

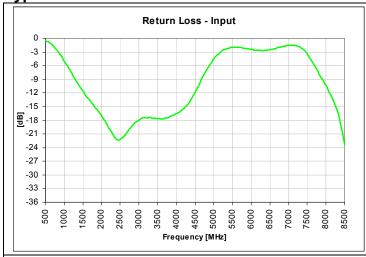


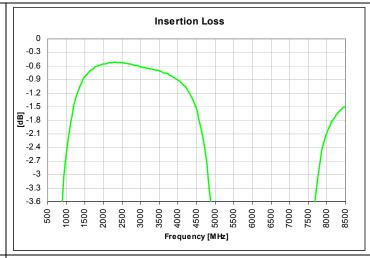

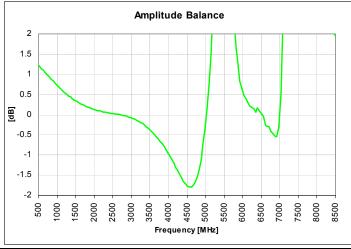

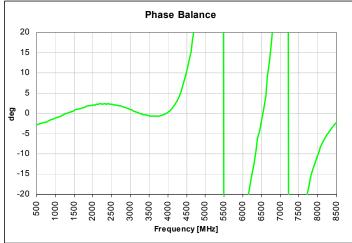

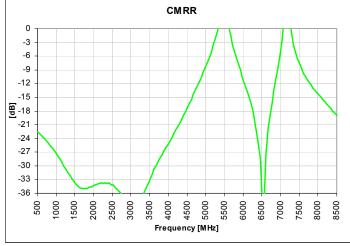




USA/Canada: (315) 432-8909 Toll Free: (800) 411-6596 Europe: +44 2392-232392 Asia: +86 512-62749282











## Typical Performance: 2300 MHz. to 2600 MHz.

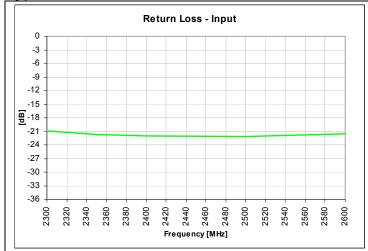

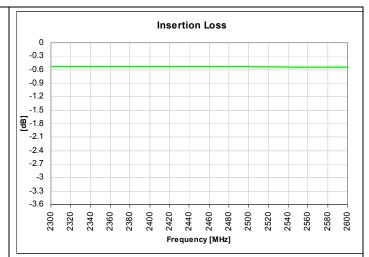

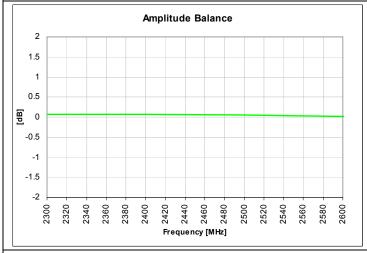

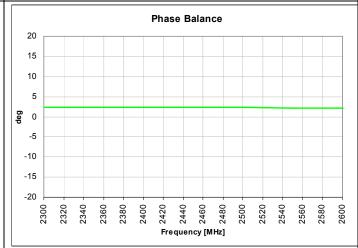

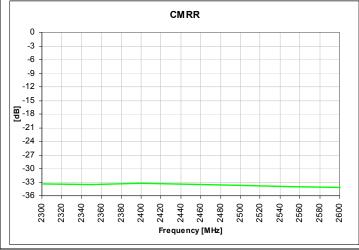



ground

Rev C



### **Mounting Configuration:**

In order for Xinger surface mount components to work optimally, the proper impedance transmission lines must be used to connect to the RF ports. If this condition is not satisfied, insertion loss, Isolation and VSWR may not meet published specifications.

All of the Xinger components are constructed from organic PTFE based composites which possess excellent electrical and mechanical stability. Xinger components are compliant to a variety of ROHS and Green standards and ready for Pb-free soldering processes. Pads are Gold plated with a Nickel barrier.

An example of the PCB footprint used in the testing of these parts is shown below. An example of a DC-biased footprint is also shown below. In specific designs, the transmission line widths need to be adjusted to the unique dielectric coefficients and thicknesses as well as varying pick and place equipment tolerances.

#### **No Bias Footprint DC Bias Footprint** Circuit Pattern Dimensions are in Millimeters Circuit Pattern Dimensions are in Millimeters Plated thru Mounting Footprint Mounting Footprint holes to Footprint Pad (s) Footprint Pad (s) ground Solder Resist Solder Resist 0402 Capacitor Plated thru holes to ground 6x .41 3x Transmission 3x Transmission lines lines 6x .33 6x .33-0 Plated thru holes to 4x .25 holes to




USA/Canada: (315) 432-8909 Toll Free: (800) 411-6596 Europe: +44 2392-232392 Asia: +86 512-62749282


ground




### **Packaging and Ordering Information**

Parts are available in reel and are packaged per EIA 481-2. Parts are oriented in tape and reel as shown below. Minimum order quantities are 4000 per reel. See Model Numbers below for further ordering information.

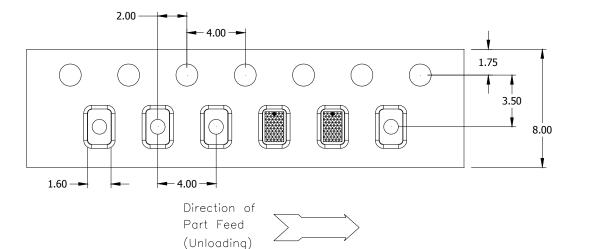



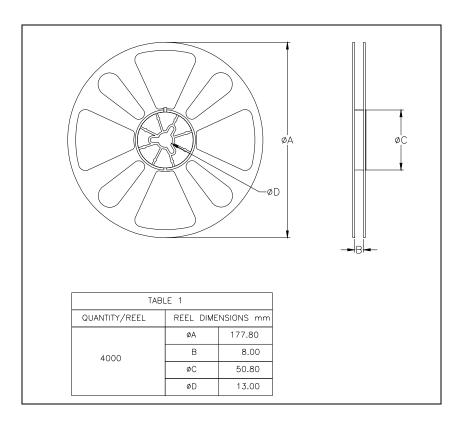

USA/Canada: (315) 432-8909 Toll Free: (800) 411-6596 Europe: +44 2392-232392 Asia: +86 512-62749282