

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China







ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	NOTES
1	50-00026	Connector, dc plug, 5.5x2.5xL23 mm, molding style, spring contacts	1	Black overmold, PVC
2	50-00027	Connector, dc jack, 5.5x2.5xL17.4 mm, molding style	1	Black overmold, PVC
3	30-00007	Wire, 2C BC, 18 AWG, UL2468, 300V, 80C, 4.4 mm, VW-1, PVC, 48P	1	Black

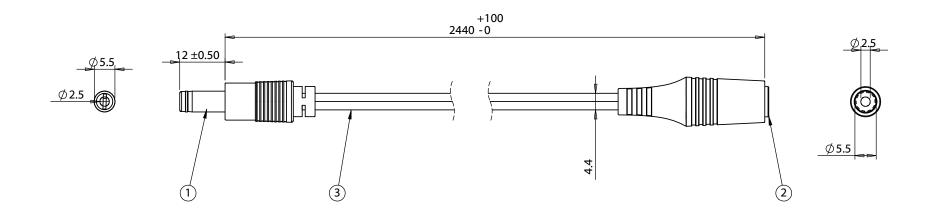

50-00026	Wiring diagram Wire	50-00027			
Center	Stripe	Center			
Sleeve	Black	Sleeve			

REVISION A	DATE 6/2/2014	DESCRIPTION Initial release	PREPARED: JM 2014.06.02 15:51:35 -07'00'	NOTES RoHS and REACH compliant		20802 Sockeye Place #130 Bend, OR 97701 USA te/ 541.323.3228 fax 541.323.4202 800877.670.7118 www.tensility.com			
			VERIFIED: AG 2014.06.02 16:01:31 -07'00'	Function test: no open, no reve short circuit, no INT	rsed polarity, no				
			DIMENSIONS ARE IN MILLIMETERS			800 877.370.71		.,, i i o www.ten.	sinty.com
			TOLERANCES: X: ± 0.5 mm X.X: + 0.3 mm	DESCRIPTION: Cable, 2440 mm, 5.5x2.5x12 mm, 50-00026 dc plug to 5.5x2.5 50-00027 dc jack, 18 AWG, 30-00007 wire					
		<u> </u>	X.XX: ± 0.05 mm			SCALI	E: 1:1	WEIGHT:	SHEET 1 OF 1

5 4 3 2