



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



STRUCTURE Silicon Monolithic Integrated Circuit

TYPE **BDE1204G**

PRODUCT Thermostat and Analog Temperature Sensor

- FEATURES
- 1) Highly accurate thermostat (  $\pm 4.0^{\circ}\text{C}$  )
  - 2) Thermostat sensing temperature 115, 120, 125 $^{\circ}\text{C}$  with CTRL state
  - 3) Open drain output
  - 4) Hysteresis temperature ( TYP. 10 $^{\circ}\text{C}$  )
  - 5) Highly accurate analog output (  $\pm 3.5^{\circ}\text{C}@T_a = 30^{\circ}\text{C}$  )
  - 6) Analog output temperature sensitivity ( - 10.68 [ mV/ $^{\circ}\text{C}$  ] )
  - 7) Low supply current ( TYP. 16.0 $\mu\text{A}$  )
  - 8) Small package ( TYP. 2.90mm $\times$  2.80mm $\times$  1.25mm )

• ABSOLUTE MAXIMUM RATINGS (  $T_a = 25^{\circ}\text{C}$  )

PARAMETERS	SYMBOL	LIMIT	UNIT
Power Supply Voltage	$V_{DD}$	- 0.3 to 7.0 <sup>*1</sup>	V
Input Voltage ( CTRL )	$V_{IN}$	- 0.3 to $V_{DD}+0.3$	V
Input Current ( CTRL )	$I_{IN}$	- 1.0, +0.1	mA
OS terminal Voltage	$V_{OS}$	- 0.3 to 7.0	V
OS terminal Current	$I_{OS}$	5.0	mA
Power dissipation	$P_d$	540 <sup>*2</sup>	mW
Storage Temperature Range	$T_{stg}$	- 55 to 150	$^{\circ}\text{C}$

\*1. Not to exceed  $P_d$

\*2. Reduced by 5.40mW for each increase in  $T_a$  of 1 $^{\circ}\text{C}$  over 25 $^{\circ}\text{C}$   
( mounted on 70mm $\times$  70mm $\times$  1.6mm Glass- epoxy PCB )


• RECOMMENDED OPERATING CONDITION

PARAMETERS	SYMBOL	MIN.	TYP.	MAX.	UNIT
Power Supply Voltage	VDD	2.9	3.0	5.5	V
Operating Temperature Range	$T_{opr}$	- 30	-	130	$^{\circ}\text{C}$

• Status of this document

The Japanese version of this document is the formal specification. A customer may use this translation version only for a reference to help reading the formal version. If there are any difference in translation version of this document, formal version takes priority.

- BLOCK DIAGRAM

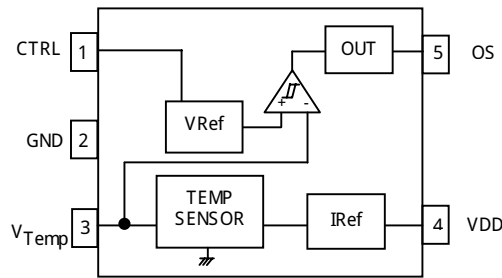

- PIN DESCRIPTION

PIN NO.	PIN NAME	FUNCTION	COMMENT
1	CTRL	Sensing temperature setting	Refer to page 3/4 ( TEMPERATURE / OUTPUT FORMAT TABLE ) for the sensing temperature setting.
2	GND	GROUND	
3	V <sub>temp</sub>	Output voltage in inverse proportion to the temperature ( TYP. - 10.68mV/°C )	Set the OPEN state or connect high impedance input node.
4	VDD	POWER SUPPLY	
5	OS	Digital thermostat output	Open Drain type ( Active L ) Use the pull-up resistor more than 10kΩ .

- TEMPERATURE ACCURACY ( unless otherwise specified, V<sub>DD</sub> = 3.0V )

PARAMETER	SYMBOL	LIMIT			UNIT	CONDITIONS
		MIN.	TYP.	MAX.		
Thermostat						
Sensing Temperature Accuracy	T <sub>acc</sub>	-	0	± 4.0	°C	T <sub>a</sub> = 115, 120, 125°C
Sensing Temperature Hysteresis	T <sub>hys</sub>	7.5	10.0	12.5	°C	
Analog Output						
V <sub>Temp</sub> Temperature Accuracy	T <sub>Temp</sub>	-	-	± 3.5	°C	T <sub>a</sub> = 30°C

- ELECTRICAL CHARACTERISTICS ( unless otherwise specified, V<sub>DD</sub> = 3.0V, T<sub>a</sub> = 25°C )

PARAMETER	SYMBOL	LIMIT			UNIT	CONDITIONS
		MIN.	TYP.	MAX.		
Supply Current	I <sub>DD</sub>	-	16.0	20.0	μA	CTRL = 3.0V
Analog Output						
V <sub>Temp</sub> Output Voltage	V <sub>Temp</sub>	1.716	1.753	1.790	V	T <sub>a</sub> = 30°C
V <sub>Temp</sub> Temperature Sensitivity	V <sub>SE</sub>	- 10.28	- 10.68	- 11.08	mV/°C	T <sub>a</sub> = - 30 to 100°C
V <sub>Temp</sub> Load Regulation	ΔV <sub>TempRL</sub>	-	-	1	mV	difference of I <sub>OUT</sub> : 0μA / 2μA
OS Output Open Drain						
OS Leakage Current	I <sub>L</sub>	-	-	1.0	μA	OS : 5.0V
OS Output Voltage	V <sub>OL</sub>	-	-	0.4	V	I <sub>inos</sub> = 1.2mA
CTRL						
Input L Voltage	V <sub>IL</sub>	GND	-	0.6	V	
Input H Voltage	V <sub>IH</sub>	2.4	-	V <sub>DD</sub>	V	


Radiation hardness is not designed.

• BDE12040G TEMPERATURE / OUTPUT FORMAT TABLE

CTRL INPUT L : Low, O : Open, H : High

TYPE	SENSING TEMPERATURE (°C)			OS Output FORMAT		MARKING
	CTRL					
	L	H	O			
BDE1204G	120	125	115	Open Drain	Active L	fA

• PACKAGE OUTLINES ( SSOP5 )

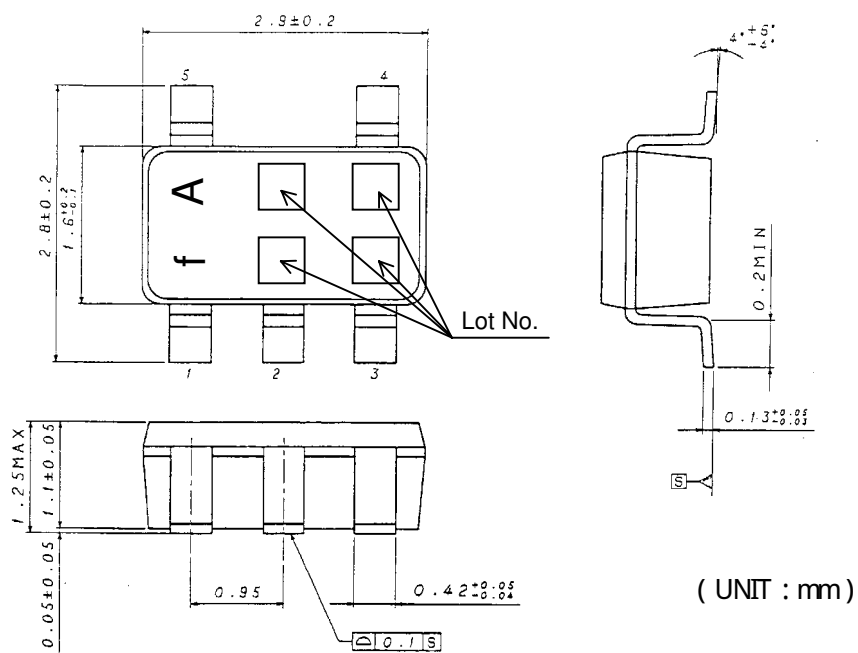

- CAUTIONS ON USE

- 1) Absolute Maximum Ratings

An excess in the absolute maximum ratings, such as supply voltage, temperature range of operating conditions, etc., can break down devices, thus making impossible to identify breaking mode such as a short circuit or an open circuit. If any special mode exceeding the absolute maximum ratings is assumed, consideration should be given to take physical safety measures including the use of fuses, etc.

- 2) GND voltage

Make setting of the potential of the GND terminal so that it will be maintained at the minimum in any operating state.

- 3) Pin short and mistake fitting

When mounting the IC on the PCB, pay attention to the orientation of the IC. If there is a placement mistake, the IC may be burned up.

- 4) Operation in strong electric field

Be noted that using ICs in the strong electric field can malfunction them.

- 5) Mutual impedance

Use short and wide wiring tracks for the power supply and ground to keep the mutual impedance as small as possible. Use a capacitor to keep ripple to a minimum.