



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



5.0V 2.5F


BMOD002 P005 B02
EMHSR-0002C5-005R0

Datasheet


FEATURES

- High performance product with low ESR
- Exceptional shock and vibration resistance
- Long lifetimes with up to 500,000 duty cycles*
- Compliant with RoHS and REACH requirements
- Recommended Application:

Actuators, Emergency Lighting, Telematics, Automotive, Security Equipment, Backup System, Smoke Detectors, Advanced Metering, and Others

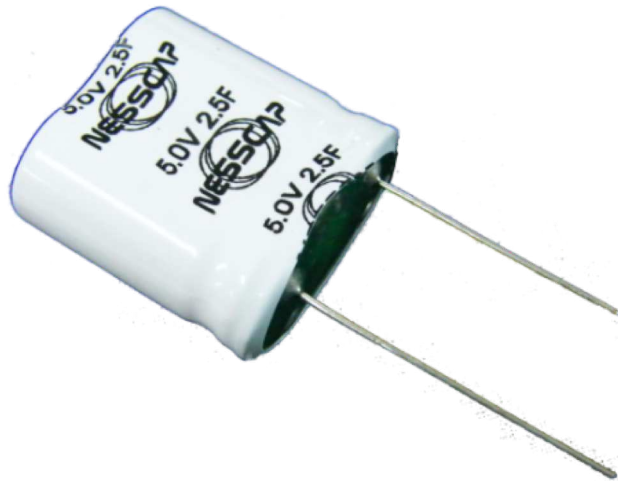

See Note on Mounting Recommendations¹⁰

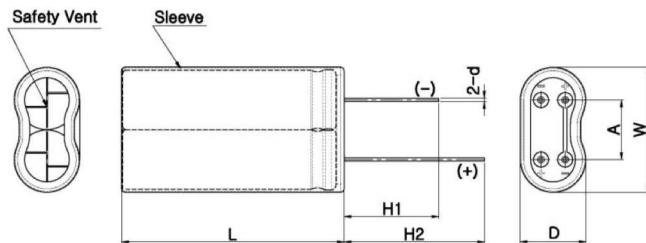

ELECTRICAL SPECIFICATIONS

Rated Voltage, V_R		5.0 VDC
Surge Voltage ¹		5.4 VDC
Rated Capacitance, C^2		2.5 F
Capacitance Tolerance	Min. / Max.	-10% / +20%
	Average ⁴	+5% / +10%
Initial DC-ESR, R_{DC}^3	Max.	85 mΩ
	Average ⁴	69 mΩ
Maximum Leakage Current ⁵		8 μA
Maximum Peak Current, Non-repetitive ⁶		5.1 A

TYPICAL LIFETIME CHARACTERISTICS*

Projected DC Life at Room Temperature ⁸ (Continuous charging at V_R and $25 \pm 10^\circ\text{C}$)	10 years
DC Life at Standard High Temperature ⁸ (Continuous charging at V_R and 65°C)	1,500 hours
DC Life at De-Rated Voltage & Higher Temp. ⁸ (Continuous charging at 4.6V and 85°C)	1,500 hours
Projected Cycle Life at Room Temperature ⁸ (Constant current charge-discharge from V_R to $1/2V_R$ at $25 \pm 10^\circ\text{C}$)	500,000 cycles
Shelf Life (Stored without charge at $25 \pm 10^\circ\text{C}$)	4 years

TYPICAL THERMAL CHARACTERISTICS

Thermal Resistance, R_{th} (Housing)	69°C/W
Thermal Capacitance, C_{th}	4.3 J/°C
Usable Continuous Current ($\Delta T = 15^\circ\text{C}$) ⁹	1.6 A
Usable Continuous Current ($\Delta T = 40^\circ\text{C}$) ⁹	2.6 A

DIMENSION & WEIGHT

D (Max)	12 mm	H1 (Min.)	15.0 mm
L (Max)	23 mm	H2 (Min.)	19.0 mm
W (Max)	21.5 mm	d (± 0.05)	0.6 mm
A (± 0.1)	10.6 mm	Nominal Weight	5.0 g

SAFETY & ENVIRONMENTAL

RoHS & REACH	Compliant
--------------	-----------

OPERATING ENVIRONMENT / POWER & ENERGY

Operating Temperature Range	Standard (-40°C to 65°C)		Extended (-40°C to 85°C)	
	Maximum Stored Energy, E_{max} ⁷	at 5.0V	8.6 mWh	at 4.6V
Gravimetric Specific Energy ⁷	at 5.0V	1.7 Wh/kg	at 4.6V	1.4 Wh/kg
Usable Specific Power ⁷	at 5.0V	7.0 kW/kg	at 4.6V	5.9 kW/kg
Impedance Match Specific Power ⁷	at 5.0V	14.7 kW/kg	at 4.6V	12.4 kW/kg

*Results may vary. Additional terms and conditions, including the limited warranty, apply at the time of purchase. See the warranty details for applicable operating and use requirements.


NOTE

1. Surge Voltage

- > Absolute maximum voltage, non-repetitive. The duration must not exceed 1 second.

2. Rated Capacitance (Measurement Method)

- > Constant current charge with $4 * C * V_R$ [mA] to V_R .
e.g. In case of 5.0V 2.5F module, $4 * 2.5 * 5 = 50$ mA
- > Constant voltage charge at V_R for 5 min.
- > Constant current discharge with $4 * C * V_R$ [mA] to 0.1V.

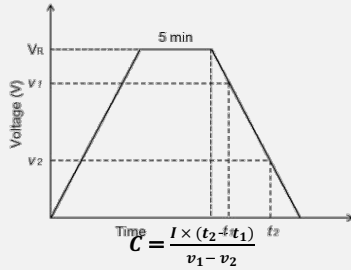


where C is the capacitance (F);

I is the absolute value of the discharge current (A);
 v_1 is the measurement starting voltage, $0.8 \times V_R$ (V);
 v_2 is the measurement end voltage, $0.4 \times V_R$ (V);
 t_1 is the time from discharge start to reach v_1 (s);
 t_2 is the time from discharge start to reach v_2 (s)

3. Initial DC-ESR (Measurement Method)

- > Constant current charge with $4 * C * V_R$ [mA] to V_R .
- > Constant voltage charge at V_R for 5 min.
- > Constant current discharge with $40 * C * V_R$ [mA] to 0.1V.
e.g. In case of 5.0V 2.5F module, $40 * 2.5 * 5.0 = 500$ mA



$$ESR_{DC} = \frac{\Delta v}{I}$$

where ESR_{DC} is the DC-ESR (Ω);

Δv is the voltage drop during first 10ms of discharge (V);
 I is the absolute value of the discharge current (A)

4. Average

- > Typical percentage spread that may be present in one shipment.

5. Maximum Leakage Current (Measurement Method)

- > The capacitor is charged to its rated voltage V_R at 25°C.
- > Leakage current is the amount of current measured after 72 hours of continuous holding of the capacitor at V_R .

6. Maximum Peak Current

- > Current that can be used for 1-second discharging from the rated voltage to the half-rated voltage under the constant current discharging mode.

$$I = \frac{\frac{1}{2}V_R}{\Delta t / C + ESR_{DC}}$$

where I is the maximum peak current (A);

V_R is the rated voltage (V);

Δt is the discharge time (sec); $\Delta t = 1$ sec in this case;

C is the rated capacitance (F);

ESR_{DC} is the maximum DC-ESR (Ω)

- > The stated maximum peak current should **not** be used in normal operation and is only provided as a reference value.

7. Energy & Power (Based on IEC 62391-2)

- > Maximum Stored Energy, E_{max} (Wh) = $\frac{\frac{1}{2}CV_R^2}{3600}$
- > Gravimetric Specific Energy (Wh/kg) = $\frac{E_{Max}}{Weight}$
- > Usable Specific Power (W/kg) = $\frac{0.12V_R^2}{ESR_{DC} \times Weight}$
- > Impedance Match Specific Power (W/kg) = $\frac{0.25V_R^2}{ESR_{DC} \times Weight}$

8. DC Life and Cycle Life Test

- > End-of-Life (EOL) Conditions:
 - Capacitance: -20% from the rated minimum value
 - DC-ESR: +100% from the specified maximum initial value
- > Capacitance and ESR measurements are taken at 25°C.

9. Usable Continuous Current

- > Maximum current which can be used within the allowed temperature range under the constant current discharging mode.

$$I = \sqrt{\frac{\Delta T}{R_{th} \times ESR_{DC}}}$$

where I is the maximum continuous current (A);

ΔT is the change in temperature ($^{\circ}C$);

R_{th} is the thermal resistance ($^{\circ}C/W$);

ESR_{DC} is the maximum DC-ESR (Ω)

10. Mounting Recommendations

- > Provide properly spaced holes for mounting according to the specified cell dimension in order to minimize the terminal leads of the cell being mechanically stressed.
- > Do not place any through-holes directly underneath the cell or in the close proximity of the cell. Allow at least 5mm distance from any point on the outer diameter of the cell to the outer diameter of any through-hole.
- > Protective coating of components on the PCB is strongly recommended in order to reduce the risk of the components being damaged in an event of electrolyte leakage.
- > The recommended mounting orientation is with the terminal leads pointing upward.
- > Provide at least 2mm clearance from the safety vent and do not position anything near the safety vent that may be damaged by the vent rupture.
- > Assemble the cell on the PCB taking into account that the cell may not be completely hermetic during its lifetime. Electrolyte vapor and gases generated during normal operation may escape the package.
- > Soldering guide for small and medium size cells is available and can be found at www.nesscap.com under Support -> Download.

When ordering, please reference the Maxwell Model Number below.

Maxwell Model Number: BMOD0002 P005 B02	Maxwell Part Number: 133731	Nesscap Model Number: EMHSR-0002C5-005R0
--	--------------------------------	---

Maxwell Technologies, Inc.
 Global Headquarters
 3888 Calle Fortunada
 San Diego, CA 92123
 USA
 Tel: +1 (858) 503-3300
 Fax: +1 (858) 503-3301

Maxwell Technologies SA
 Route de Montena 65
 CH-1728 Rossens
 Switzerland
 Tel: +41 (0)26 411 85 00
 Fax: +41 (0)26 411 85 05

Maxwell Technologies, GmbH
 Leopoldstrasse 244
 80807 Munich
 Germany
 Tel: +49 (0)89 4161403 0
 Fax: +49 (0)89 4161403 99

Maxwell Technologies
 Shanghai Trading Co., Ltd
 Room 1005, 1006, 1007
 No. 1898, Gonghexin Road,
 Jing An District, Shanghai 200072
 P.R. China
 Tel: +86 21 3680 4600
 Fax: +86 21 3680 4699

Nesscap Co., Ltd.
 17, Dongtangiheung-ro 681beon-gil,
 Giheung-gu, Yongin-si,
 Gyeonggi-do
 17102
 Republic of Korea
 Tel: +82 31 289 0721
 Fax: +82 31 286 6767

The data in this document 3001961 corresponds to the data in Nesscap document 20170912 Rev04. The information in this document is correct at time of printing and is subject to change without notice. Images are not to scale.

MAXWELL TECHNOLOGIES, MAXWELL, MAXWELL CERTIFIED INTEGRATOR, ENABLING ENERGY'S FUTURE, NESSCAP, BOOSTCAP, D CELL, CONDIS and their respective designs and/or logos are either trademarks or registered trademarks of Maxwell Technologies, Inc., and/or its affiliates, and may not be copied, imitated or used, in whole or in part, without the prior written permission Maxwell Technologies, Inc. All contents copyright © 2017 Maxwell Technologies, Inc. All rights reserved. No portion of these materials may be reproduced in any form, or by any means, without prior written permission from Maxwell Technologies, Inc.