

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China







ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	COMPONENT NOTES
1	50-00024	Connector, dc plug, 5.5x2.1xL23 mm, molding style, spring contacts	1	
2	50-00025	Connector, dc jack, 5.5x2.1xL17.4 mm, molding style	1	
3	30-00440	Wire, 2C TS, 16 AWG, UL2468, 300V, 80C, 4.8 mm, VW-1, PVC, 87A	1	
4	24-00003	Overmold, PVC	1	black
5	24-00004	Overmold, PVC	1	black

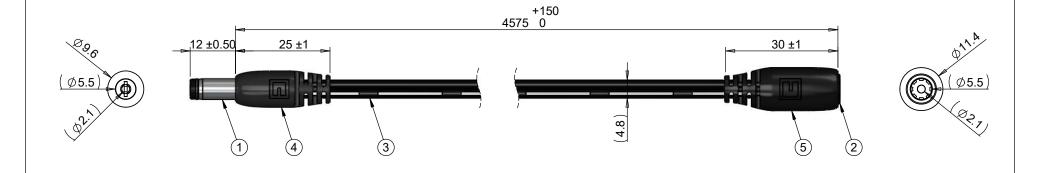

Notes: Cables individually tied and bundled in groups of 10

Functionally equivalent components may be substituted

Wiring Diagram								
50-00024	wire color	50-00025						
center	black with stripe	center						
sleeve	black	sleeve						

Revision:	Date:	Description:	Prepared:	Notes:			
Α	11/22/2016	Initial release	DN Digitally signed by DN Date: 2016.11.22 09:16:02 -08'00'	RoHS and REACH compliant	TEI	NSII	ITY
			Verified: GL Digitally signed by GL Date: 2016.11.22 11:44:23 -08'00'	Function test: no open, no short circuit, no intermittent			800 877.670.7118 web tensility.com
			Dimensions are in millimeters. Tolerances: X: ± 0.5 mm	Description: Cable, 4575 mm, 5.5x2.1x12 mm 50-00024 dc	Size: Part n	umber: 2380	
			X.X: ± 0.3 mm X.XX: ± 0.05 mm	plug to 5.5x2.1 mm 50-00025 dc jack, 16 AWG, 30-00440 wire	Scale: 1:1		Sheet 1 of 1

3 1