



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

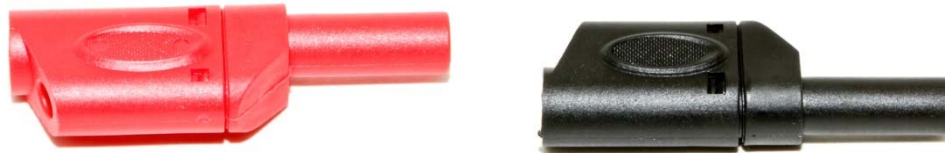
Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



BU-31104-*
(Insulated, Stackable Banana Plug)

**DESCRIPTION:**

The BU-31104-* is a fully insulated, stackable 4mm Banana plug. It can be plugged into any standard 4mm banana jack that accepts shrouded banana plugs. The Jack end will accept any shrouded, un-shrouded, or retractable 4mm banana. This part is designed to be soldered to wire from 16-22 AWG and then simply snaps together. The banana plug has a plastic safety tip.

MATERIAL:

Banana: Nickel plated beryllium copper

Insulator: Polypropylene

Size:

Length = 2.1" (53mm), Width = .73" (19mm), Height = .45" (11mm)

Ratings:

20 Amps, Hands free testing up to 1,000 VRMS.

Colors:

* In part number indicates color: -0 Black, -2 Red

RoHS Compliant

Assembly Instructions



- 1) Thread wire thru offset hole of housing and solder into cross hole in Banana Plug.



- 2) Align the Banana plug into the housing as shown



- 3) Snap together