



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



MIRA-WW

~60° wide beam


TECHNICAL SPECIFICATIONS:

Dimensions	Ø 32.4 mm
Height	14.7 mm
Fastening	glue
Colour	clear
Box size	480 x 280 x 300 mm
Box weight	7.3 kg
Quantity in Box	840 pcs
ROHS compliant	yes ⓘ




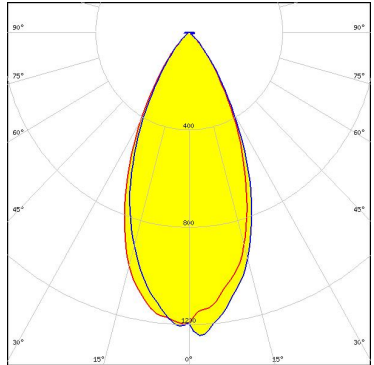
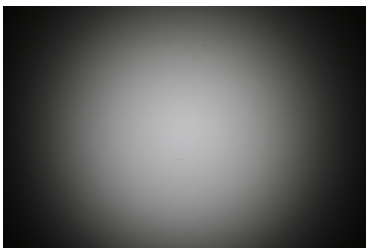
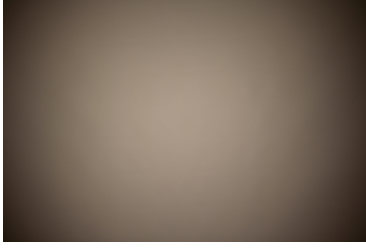
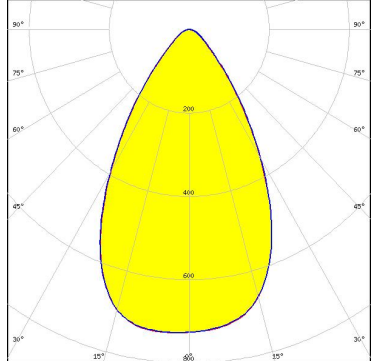
MATERIAL SPECIFICATIONS:

Component	Type	Material	Colour
MIRA-WW	Lens	PC	clear

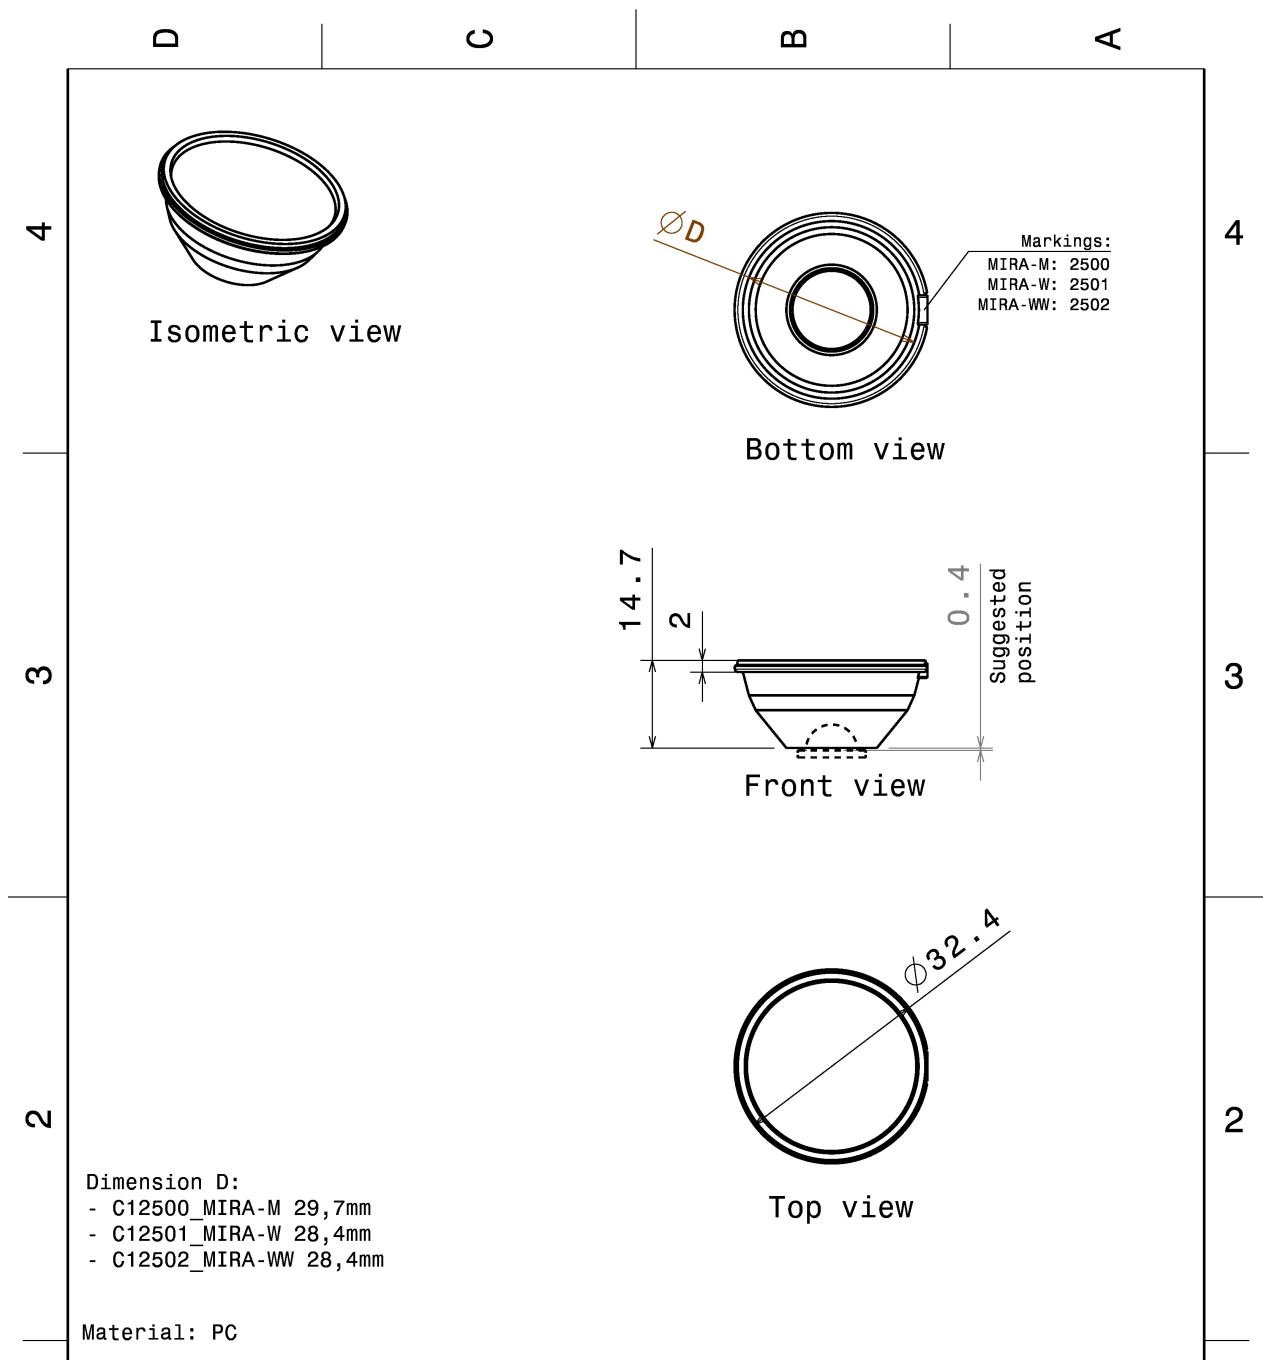

This drawing is our property. It can't be reproduced or communicated without our written agreement.		LEDiL <small>A WORLD OF INNOVATION</small>		Ledil Oy Salorankatu 10 FIN 24240 SALO Finland	
DRAWING TITLE		Datasheet MIRA lens			
DRAWN BY mav	DATE 02.04.2012	SIZE A4			REV 1
CHECKED BY sn	DATE 02.04.2012	DRAWING NUMBER -			
DESIGNED BY mav	DATE 29.11.2011	SCALE 1:1	WEIGHT (g)	SHEET 1/1	



PHOTOMETRIC DATA (MEASURED):

<p>bridgelux</p> <p>LED BXRA ES Star</p> <p>FWHM 54.0°</p> <p>Efficiency 83 %</p> <p>Peak intensity cd/lm</p> <p>Required components:</p>		
<p>bridgelux</p> <p>LED V10 Gen6</p> <p>FWHM 56.0°</p> <p>Efficiency 78 %</p> <p>Peak intensity 0.920 cd/lm</p> <p>Required components:</p>		
<p>CREE ⇄</p> <p>LED CXA/B 15xx</p> <p>FWHM 53.0°</p> <p>Efficiency 84 %</p> <p>Peak intensity 1.100 cd/lm</p> <p>Required components:</p>		
<p>CREE ⇄</p> <p>LED MHD-E/G</p> <p>FWHM 61.0°</p> <p>Efficiency 81 %</p> <p>Peak intensity 0.730 cd/lm</p> <p>Required components:</p>		



PHOTOMETRIC DATA (MEASURED):




LED MT-G
FWHM 58.0°
Efficiency 81 %
Peak intensity 0.900 cd/lm
Required components:

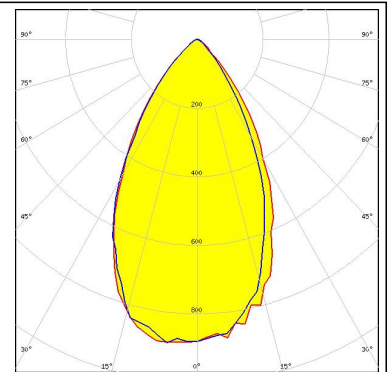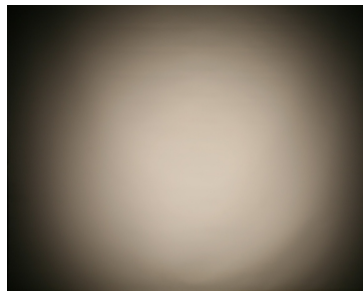



LED XHP70
FWHM 61.0°
Efficiency 82 %
Peak intensity 0.760 cd/lm
Required components:

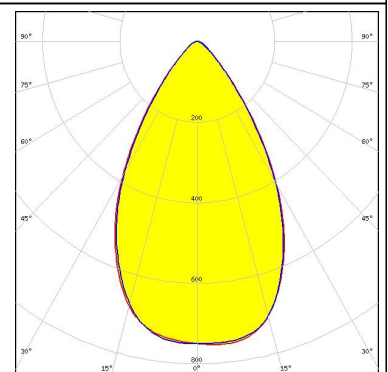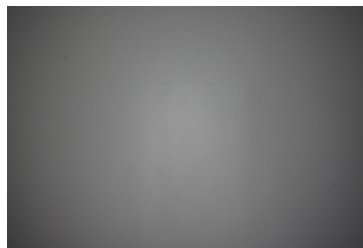

LED LUXEON M/MX
FWHM 57.0°
Efficiency 82 %
Peak intensity cd/lm
Required components:

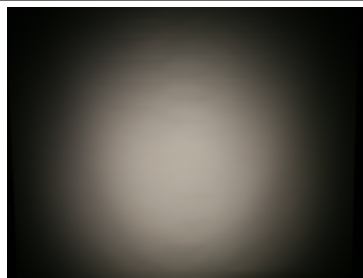



LED LUXEON MZ
FWHM 49.0°
Efficiency 81 %
Peak intensity 1.200 cd/lm
Required components:

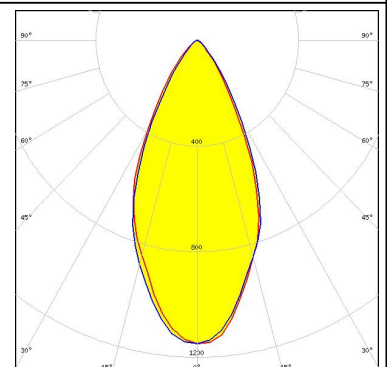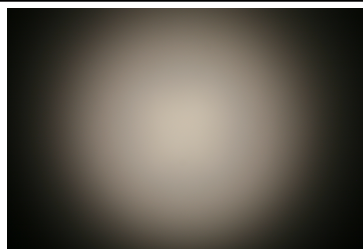



PHOTOMETRIC DATA (MEASURED):





LED NFMW48xA
FWHM 50.0°
Efficiency 82 %
Peak intensity 1.100 cd/lm
Required components:

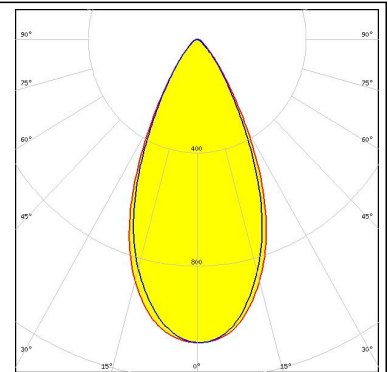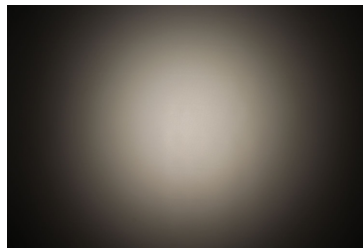


LED NSCxL036A
FWHM 57.0°
Efficiency 79 %
Peak intensity 0.900 cd/lm
Required components:

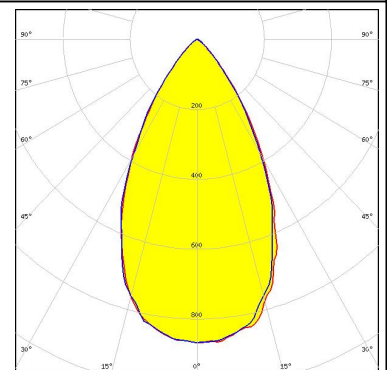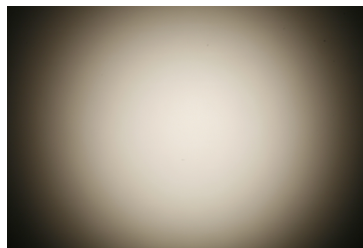

LED NSMx286M
FWHM 47.0°
Efficiency 76 %
Peak intensity 1.100 cd/lm
Required components:

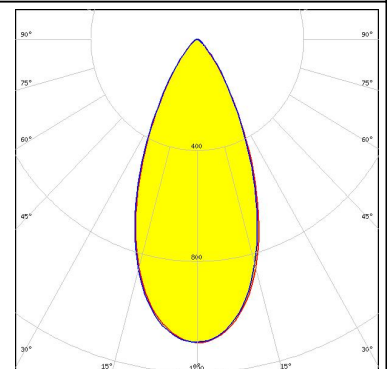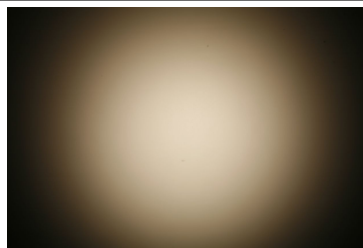

LED Duris S10
FWHM 54.0°
Efficiency 86 %
Peak intensity 1.100 cd/lm
Required components:

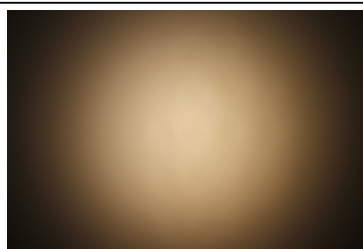

PHOTOMETRIC DATA (MEASURED):


OSRAM
Opto Semiconductors

LED Soleriq P6
FWHM 55.0°
Efficiency 78 %
Peak intensity 0.960 cd/lm
Required components:



OSRAM
Opto Semiconductors

LED Soleriq P9
FWHM 54.0°
Efficiency 78 %
Peak intensity 0.920 cd/lm
Required components:

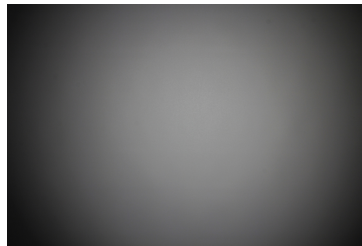


PHOTOMETRIC DATA (SIMULATED):




LED LUXEON 5258
FWHM 54.0°
Efficiency 92 %
Peak intensity 1.300 cd/lm
Required components:



OSRAM
Opto Semiconductors
LED OSCONIQ P 7070
FWHM 67.0°
Efficiency 92 %
Peak intensity 0.760 cd/lm
Required components:



Detector Image: Illuminance
21.0.2018
OSRAM LED Opto Semiconductors
C12502_MIRA-WW_SURFES_P88_20m
Configuration 1 of 1

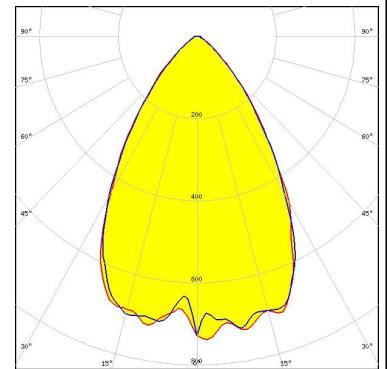

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

Due to use of high power COB's with this product, special attention to proper thermal design is highly recommended. LEDiL has no liability for direct, indirect or consecutive damages arising from the LEDiL products being used outside of the recommended temperature range.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDiL Oy

Joensuunkatu 13
FI-24240 SALO
Finland

LEDiL Inc.

228 West Page Street
Suite D
Sycamore IL 60178
USA

Local sales and technical support

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)

Shipping locations

Salo, Finland
Hong Kong, China

Distribution Partners

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)