



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



- 1N962BUR-1 thru 1N986BUR-1 AVAILABLE IN JAN, JANTX AND JANTXV PER MIL-PRF-19500/117
- ZENER DIODES
- LEADLESS PACKAGE FOR SURFACE MOUNT
- METALLURGICALLY BONDED

1N962BUR-1 thru 1N986BUR-1
and
CDLL957B thru CDLL986B


MAXIMUM RATINGS

Operating Temperature: -65°C to +175°C
Storage Temperature: -65°C to +175°C
DC Power Dissipation: 500mW @ $T_{EC} = +125^{\circ}C$
Power Derating: 10 mW / °C above $T_{EC} = +125^{\circ}C$
Forward Voltage @ 200mA: 1.1 volts maximum

ELECTRICAL CHARACTERISTICS @ 25°C

| CDI TYPE NUMBER (NOTE 1) | NOMINAL ZENER VOLTAGE V_Z (NOTE 2) | ZENER TEST CURRENT I_{ZT} | MAXIMUM ZENER IMPEDANCE (NOTE 3) | | | MAX. DC ZENER CURRENT I_{ZM} | MAX. REVERSE LEAKAGE CURRENT $I_R @ V_R$ | |
|---------------------------------------|--|--------------------------------------|-------------------------------------|------|-------------------|---|--|-------|
| | | | $Z_{ZT} @ I_{ZT}$ | | $Z_{ZK} @ I_{ZK}$ | | μA | VOLTS |
| | | | OHMS | OHMS | | | | |
| CDLL957B | 6.8 | 18.5 | 4.5 | 700 | 1.0 | 55 | 5.0 | 5.2 |
| CDLL958B | 7.5 | 16.5 | 5.5 | 700 | .5 | 50 | 5.0 | 5.7 |
| CDLL959B | 8.2 | 15.0 | 6.5 | 700 | .5 | 45 | 5.0 | 6.2 |
| CDLL960B | 9.1 | 14.0 | 7.5 | 700 | .5 | 41 | 5.0 | 6.9 |
| CDLL961B | 10 | 12.5 | 8.5 | 700 | .25 | 38 | 2.0 | 7.6 |
| CDLL962B | 11 | 11.5 | 9.5 | 700 | .25 | 32 | 1.0 | 8.4 |
| CDLL963B | 12 | 10.5 | 11.5 | 700 | .25 | 31 | 1.0 | 9.1 |
| CDLL964B | 13 | 9.5 | 13 | 700 | .25 | 28 | 0.5 | 9.9 |
| CDLL965B | 15 | 8.5 | 16 | 700 | .25 | 25 | 0.5 | 11 |
| CDLL966B | 16 | 7.8 | 17 | 700 | .25 | 24 | 0.5 | 12 |
| CDLL967B | 18 | 7.0 | 21 | 750 | .25 | 20 | 0.5 | 14 |
| CDLL968B | 20 | 6.2 | 25 | 750 | .25 | 18 | 0.5 | 15 |
| CDLL969B | 22 | 5.6 | 29 | 750 | .25 | 16 | 0.5 | 17 |
| CDLL970B | 24 | 5.2 | 33 | 750 | .25 | 15 | 0.5 | 18 |
| CDLL971B | 27 | 4.6 | 41 | 750 | .25 | 13 | 0.5 | 21 |
| CDLL972B | 30 | 4.2 | 49 | 1000 | .25 | 12 | 0.5 | 23 |
| CDLL973B | 33 | 3.8 | 58 | 1000 | .25 | 11 | 0.5 | 25 |
| CDLL974B | 36 | 3.4 | 70 | 1000 | .25 | 10 | 0.5 | 27 |
| CDLL975B | 39 | 3.2 | 90 | 1000 | .25 | 9.5 | 0.5 | 30 |
| CDLL976B | 43 | 3.0 | 93 | 1500 | .25 | 8.8 | 0.5 | 33 |
| CDLL977B | 47 | 2.7 | 105 | 1500 | .25 | 7.9 | 0.5 | 36 |
| CDLL978B | 51 | 2.5 | 125 | 1500 | .25 | 7.4 | 0.5 | 39 |
| CDLL979B | 56 | 2.2 | 150 | 2000 | .25 | 6.8 | 0.5 | 43 |
| CDLL980B | 62 | 2.0 | 185 | 2000 | .25 | 6.0 | 0.5 | 47 |
| CDLL981B | 68 | 1.8 | 230 | 2000 | .25 | 5.5 | 0.5 | 52 |
| CDLL982B | 75 | 1.7 | 270 | 2000 | .25 | 5.0 | 0.5 | 56 |
| CDLL983B | 82 | 1.5 | 330 | 3000 | .25 | 4.6 | 0.5 | 62 |
| CDLL984B | 91 | 1.4 | 400 | 3000 | .25 | 4.1 | 0.5 | 69 |
| CDLL985B | 100 | 1.3 | 500 | 3000 | .25 | 3.7 | 0.5 | 76 |
| CDLL986B | 110 | 1.1 | 750 | 4000 | .25 | 3.3 | 0.5 | 84 |

- NOTE 1** Zener voltage tolerance on "B" suffix is $\pm 5\%$. Suffix letter "A" denotes $\pm 10\%$. No Suffix denotes $\pm 20\%$. "C" suffix denotes $\pm 2\%$, and "D" suffix denotes $\pm 1\%$.
- NOTE 2** Zener voltage is measured with the device junction in thermal equilibrium at an ambient temperature of $25^{\circ}C \pm 3^{\circ}C$.
- NOTE 3** Zener impedance is derived by superimposing on I_{ZT} A 60Hz rms a.c. current equal to 10% of I_{ZT} .

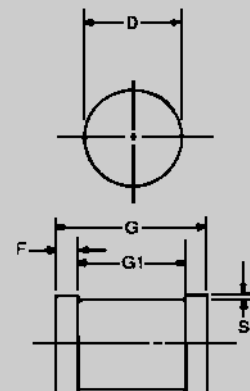

| DIM | MILLIMETERS | | INCHES | |
|-----|-------------|------|-----------|-------|
| | MIN | MAX | MIN | MAX |
| D | 1.60 | 1.70 | 0.063 | 0.067 |
| F | 0.41 | 0.55 | 0.016 | 0.022 |
| G | 3.30 | 3.70 | .130 | .146 |
| G1 | 2.54 REF. | | .100 REF. | |
| S | 0.03 MIN. | | .001 MIN. | |

FIGURE 1

DESIGN DATA

CASE: DO-213AA, Hermetically sealed glass case. (MELF, SOD-80, LL34)

LEAD FINISH: Tin / Lead

THERMAL RESISTANCE: ($R_{\theta JEC}$):
100 °C/W maximum at L = 0 inch

THERMAL IMPEDANCE: ($Z_{\theta JX}$): 35
°C/W maximum

POLARITY: Diode to be operated with the banded (cathode) end positive.

MOUNTING SURFACE SELECTION:
The Axial Coefficient of Expansion (COE) Of this Device is Approximately +6PPM/°C. The COE of the Mounting Surface System Should Be Selected To Provide A Suitable Match With This Device.




6 LAKE STREET, LAWRENCE, MASSACHUSETTS 01841
PHONE (978) 620-2600
WEBSITE: <http://www.microsemi.com>

FAX (978) 689-0803

CDLL957 thru CDLL986B

FIGURE 2

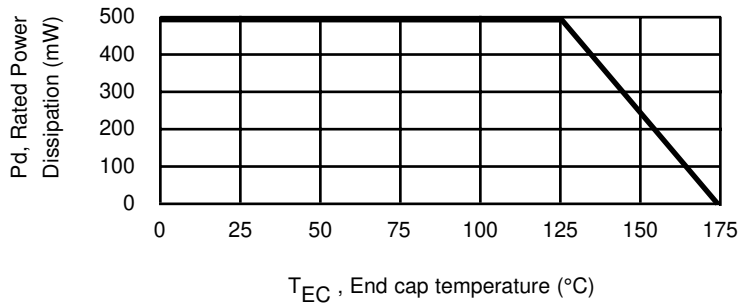

POWER DERATING CURVE

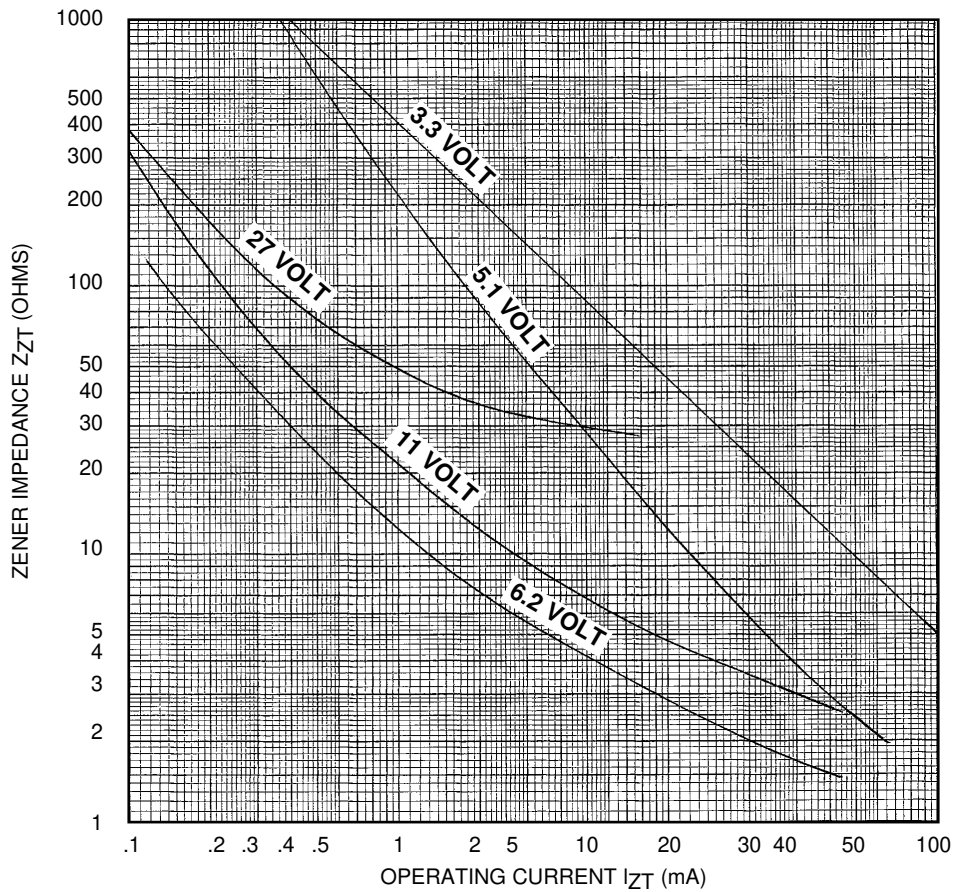


FIGURE 3

ZENER IMPEDANCE VS. OPERATING CURRENT