



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



### Features

- Low Loss
- Low Ripple
- High Rejection


### Description

Surface mount, silver (Ag) coated ceramic duplexer. Developed for use in InMarSat Infrastructure applications.

Weight: 22.1 grams typical

Material: Filter is composed of a ceramic block plated with Ag and a shield made of nickel silver plated steel.

Filter complies with RoHS standards.

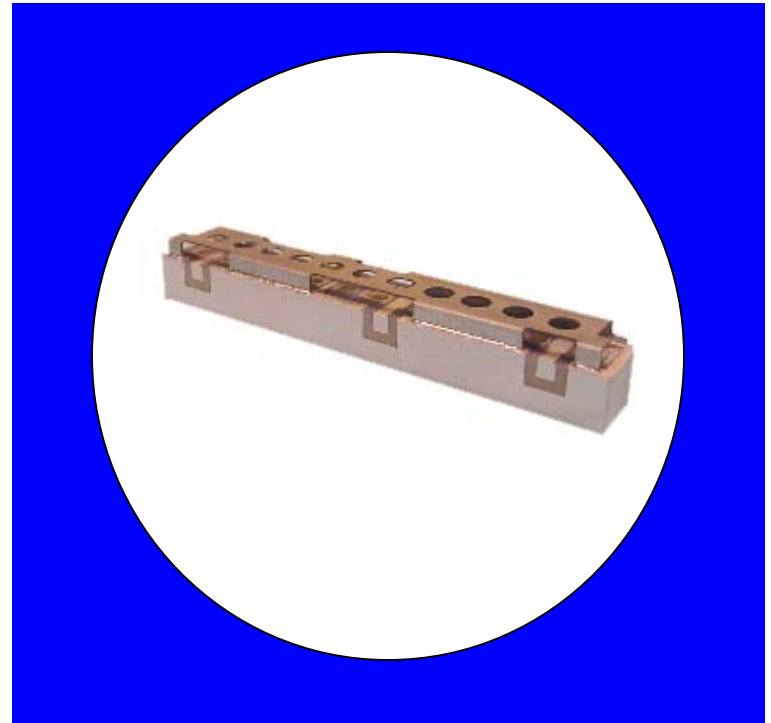

### Electrical Specifications

| Parameter                     | Frequency (MHz) | Typical @ 25°C | Spec. @ 25°C | Spec. over -40°C to +85°C |
|-------------------------------|-----------------|----------------|--------------|---------------------------|
| <b>TX to Antenna Response</b> |                 |                |              |                           |
| Passband Insertion Loss       | 1626.5-1660.5   | 0.75 dB        | 0.9 dB max   | 1.0 dB max                |
| Passband Ripple               | 1626.5-1660.5   | 0.2 dB         | 0.5 dB max   | 0.6 dB max                |
| Passband Return Loss @ TX     | 1626.5-1660.5   | 14.5 dB        | 10.0 dB min  | 10.0 dB min               |
| Attenuation:                  | 1525-1559       | 64.2 dB        | 60.0 dB min  | 60.0 dB min               |
| <b>Antenna to RX Response</b> |                 |                |              |                           |
| Passband Insertion Loss       | 1525-1559       | 0.75 dB        | 0.9 dB max   | 1.0 dB max                |
| Passband Ripple               | 1525-1559       | 0.15 dB        | 0.5 dB max   | 0.6 dB max                |
| Passband Return Loss @ ANT    | 1525-1559       | 19.5 dB        | 10.0 dB min  | 10.0 dB min               |
| Attenuation:                  | 1626.5-1660.5   | 66.2 dB        | 65.0 dB min  | 65.0 dB min               |
| <b>TX to RX Response</b>      |                 |                |              |                           |
| Rejection @ TX                | 1626.5-1660.5   | 68.0 dB        | 65.0 dB min  | 65.0 dB min               |
| Rejection @ RX                | 1525-1559       | 63.0 dB        | 60.0 dB min  | 60.0 dB min               |
| <b>Power into any port</b>    |                 | 5 Watt max     |              |                           |



Note: Supplier shall test each filter to the critical electrical specifications of the above table. Any subsequent audits may deviate from in value due to measurement repeatability among different test systems. Such deviations shall not exceed the following limits:

| Specification Allowance |        |
|-------------------------|--------|
| Insertion Loss          | 0.1 dB |
| Return Loss             | 1.0 dB |
| Stopbands               | 1.0 dB |

\*This product is covered by one or more of the following U.S. and foreign patents including: US 4,692,726;US 4,742,562; US 4,800,348;US 4,829,274;US 5,146,193;EP 0573597;DE 0573597;FR 0573597;JP 508149/92;KR 142171;US 5,162,760;US 5,218,329;US 5,250,916;US 5,327,109;US 5,488,335;CA 2114029;FR 9306297;GB 2273393;JP 3205337;KR 115113;CN 93106228.4;US 5,512,866;EP 0706719;DE 0706719;FR 0706719;GB 0706719;CN 95190359.4;US 5,602,518;US 5,721,520;US 5,745,018;EP 0910875;DE 0910875;DK 0910875;FR 0910875;GB 0910875;IE 0910875;JP 505182/98;KR 10-323013;US 5,994,978;US 6,462,629;CN 00810420.4;US 6,559,735;US 6,650,202;US 6,834,429. Other US and foreign patents pending.


\*CTS Corporation 2006 reserves all copyrights in the layout, design and configuration of the patterns on this product.\*

### Mechanical Drawing

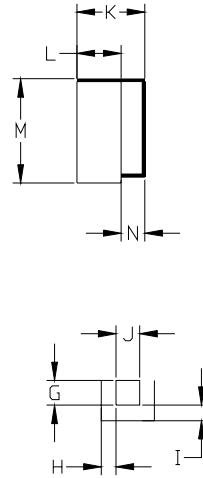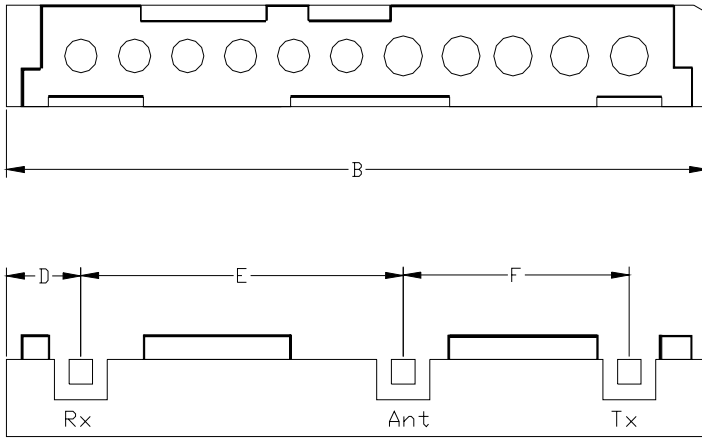


| Dim | Nominal (mm) | Tolerance (mm) +/- or max |
|-----|--------------|---------------------------|
| A   |              |                           |
| B   | 60.8         | max                       |
| C   |              |                           |
| D   | 6.43         | 0.25                      |
| E   | 27.82        | 0.13                      |
| F   | 19.49        | 0.13                      |
| G   | 2.03         | 0.13                      |
| H   | 1.27         | 0.13                      |
| I   | 1.27         | 0.13                      |
| J   | 2.03         | 0.13                      |
| K   | 9.25         | max                       |
| L   | 6.69         | 0.25                      |
| M   | 10.59        | max                       |
| N   | 2.29         | 0.13                      |

### PCB Layout

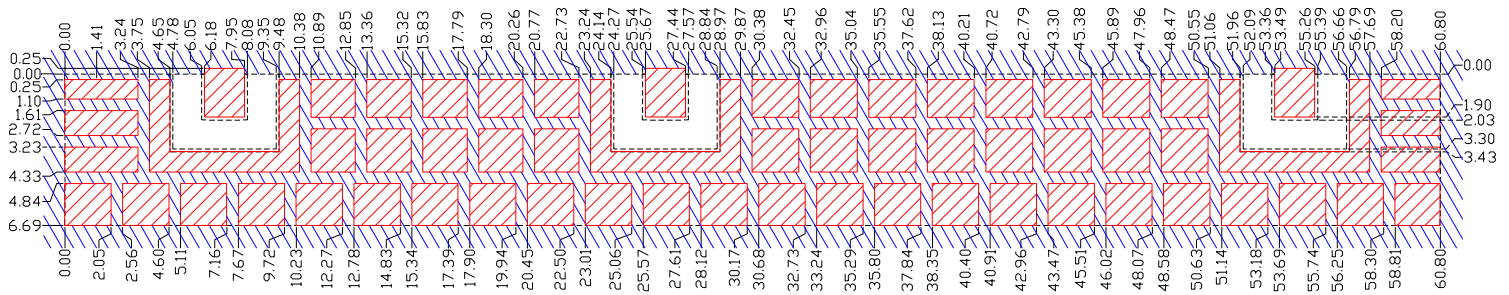


- Filter Outline
- Exposed Conductor
- Solder Resist Over Dielectric
- Solder Resist Over Conductor

### Packaging and Marking



Product is shipped in preformed foam trays

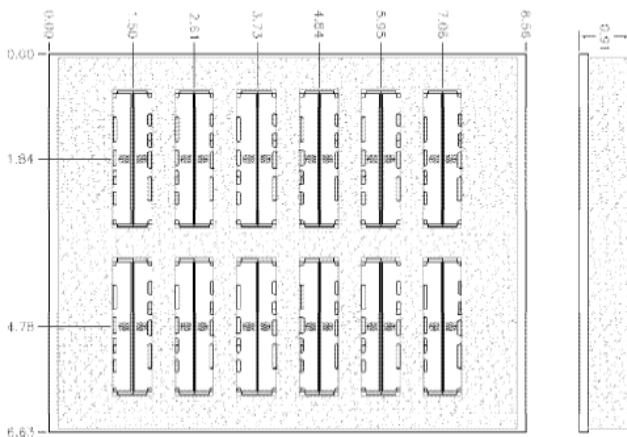

The trays have 12 slots each with 2 filters per slot. Boxes are packed with 5 Trays per box for a total of 120 filters per box.

### Electrical response

