

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China







ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	COMPONENT NOTES
1	50-00045	Connector, dc jack, 3.5x1.1xL16.5 mm, molding style	1	
2	30-00404	Wire, 2C TS, 24 AWG, UL2468, 300V, 80C, 3.0 mm, VW-1, PVC, 87A	1	
3	24-00005	Overmold, PVC	1	black

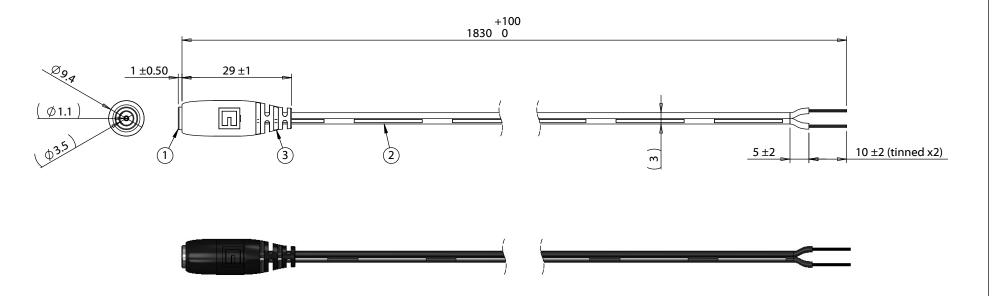

Notes:

Functionally equivalent components may be substituted

5

Wiring Diagram						
50-00045	wire color					
center	black with stripe					
sleeve	black					

Revision:	Date:	Description:	Prepared:	Notes:					
Α	10/3/2017	Initial release	AG Digitally signed by AG Date: 2017.10.05 14:08:07 -07'00'	RoHS and REACH compliant	TENSILITY			ITY	
			Verified: GL Digitally signed by GL Date: 2017.10.05 14:24:38-07'00'	Function test: no open, no short circuit, no intermittent	te	tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com			
			Dimensions are in			1.5 11.525.1202 Web terisinty.com			
			millimeters.	Description.		Part nur	nber:		
			Tolerances: X: ± 0.5 mm	Cable, 1830 mm, 3.5x1.1 mm 50-00045 dc jack to 10	Α	10-02514			
			X.X: ± 0.3 mm X.XX: ± 0.05 mm	mm tinned, 24 AWG, UL2468, 30-00404 wire		1:1		Sheet 1 of 1	

3 2