# imall

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832 Email & Skype: info@chipsmall.com Web: www.chipsmall.com Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





## CER0256B 815/860 MHz Duplexer

Rev 2 - Origin Date: December 16, 2005 - Revision Date: March 3, 2006

#### **Features**

- High rejection
- Low Loss


#### Description

Surface mount, silver (Ag) coated ceramic duplexer.

Weight: 3.9 grams typical

Material: Filter is composed of a ceramic block plated with Ag and a shield made of nickel silver plated steel.

Filter complies with RoHS standards.

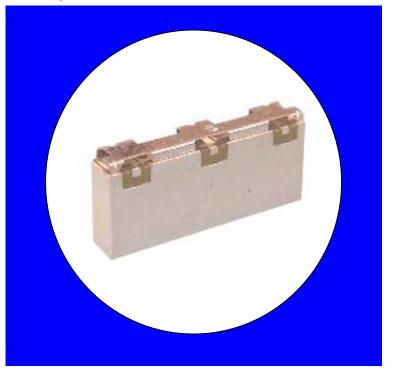

#### **Electrical Specifications**

Parameter	Frequency (MHz)	Typical @ 25ºC	Spec. @ 25ºC	Spec40ºC to +85ºC
Low Band Response				
Passband Insertion Loss	806 - 824	2.4 dB	2.8 dB max	3.0 dB max
Passband Return Loss @ TX	806 - 824	13.5 dB	10.0 dB min	10.0 dB min
Passband Return Loss @ ANT	806 - 824	13.5 dB	50.0 dB min	50.0 dB min
Attenuation:	851 - 869	53 dB	50.0 dB min	50.0 dB min
High Band Response				
Passband Insertion Loss	851 - 869	2.5 dB	2.8 dB max	3.0 dB max
Passband Return Loss @ RX	851 - 869	13.5 dB	10.0 dB min	10.0 dB min
Passband Return Loss @ ANT	851 - 869	13.5 dB	50.0 dB min	50.0 dB min
Attenuation:	806 - 824	53 dB	50.0 dB min	50.0 dB min
	896 - 941	33.0 dB	30.0 dB min	30.0 dB min
Power into any port			3 Watt max	

Note: Supplier shall test each filter to the critical electrical specifications of the above table. Any subsequent audits may deviate from in value due to measurement repeatability among different test systems. Such deviations shall not exceed the following limits:

Specification Allowance			
Insertion Loss	0.1 dB		
Return Loss	1.0 dB		
Stopbands	1.0 dB		

\*This product is covered by one or more of the following U.S. and foreign patents including: US 4,692,726;US 4,742,562; US 4,800,348;US 4,829,274;US 5,146,193;EP 0573597;DE 0573597;JP 057

•CTS Corporation 2006 reserves all copyrights in the layout, design and configuration of the patterns on this product."


Page 1 of 2



## CER0256B 815/860 MHz Duplexer

## **Mechanical Drawing**

Rev 1 – Origin Date: December 16, 2005 – Revision Date: January 11, 2006

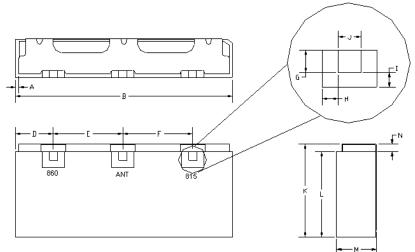



Dim	Nominal (mm)	Tolerance (mm) +/- or max
Α		
В	21.54	max
С		
D	2.72	0.20
Е	7.95	0.20
F	7.95	0.20
G	0.76	0.13
Н	1.00	0.13
I	1.00	0.13
J	0.76	0.13
К	9.80	0.30
L	8.90	0.20
М	4.00	max
*N	0.80	0.13

## Electrical response

In Development

### **PCB** Layout

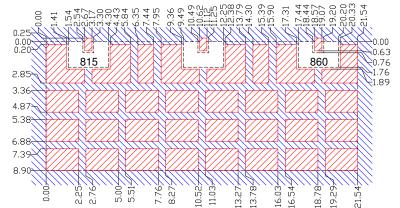

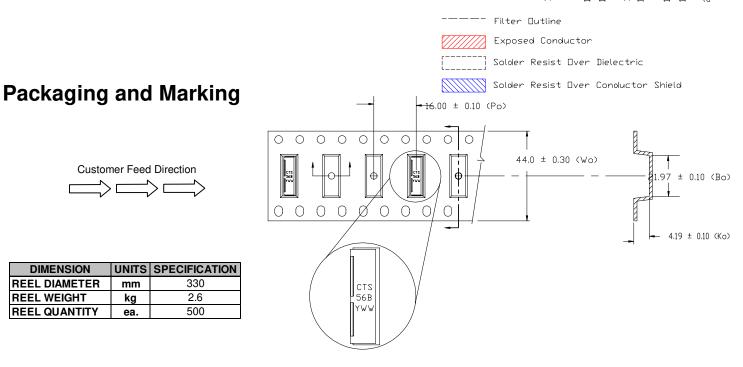

Document No. 008-0256-0

Page 2 of 2

Rev. X4VH

- CTS Electronic Components - www.ctscorp.com - 171 Covington Drive - Bloomingdale, IL 60108 -