imall

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832 Email & Skype: info@chipsmall.com Web: www.chipsmall.com Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





Features

DC to 4 GHz

- Flanged model
- Low VSWR


Applications High power RF transmission

CHF5225CBF Series 60 W Power RF Flanged Chip Termination

General Specifications


Substrate	Beo
Resistive Film	Thick Film
Tab	Ag
Cover Substrate	AL203
Mounting Flange	Cu plated with Ni
Resistance	
Tolerance	
Packaging	100 pcs./box
Absolute Ratings	

Power	60 W
Frequency	4.0 GHz
VSWR	1.2 Maximum

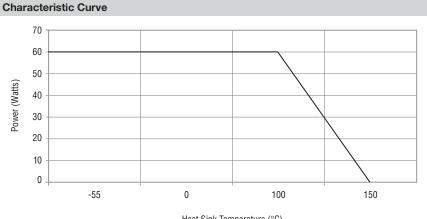

Heat Sink Temperature (°C)

Product Dimensions

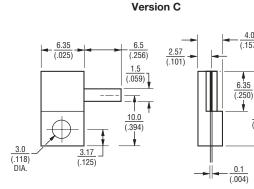


Version D

6.5

(.256)

1

Version E



How To Order

4.0 (.157)

6.35

¥. 13.1

(.516)



Reliable Electronic Solutions

Asia-Pacific: Tel: +886-2 2562-4117 Fax: +886-2 2562-4116 Europe: Tel: +41-41 768 5555 Fax: +41-41 768 5510 The Americas: Tel: +1-951 781-5500 Fax: +1-951 781-5700 www.bourns.com

CHF 5225 C B F 500 L Model Size Version Substrate Mount -F = Flange Value -500 = 50 Ohm Function -L = Termination