

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China









Features

- DC to 4 GHz
- Flanged model
- Low VSWR

Applications

■ High power RF transmission


CHF5225CNF Series 60 W Power RF Flanged Chip Termination

General Specifications
SubstrateALN
Resistive FilmThick Film
TabAg
ProtectionEpoxy
Tab Attachment
Brazed with Epoxy Encapsulation
Mounting FlangeCu plated with Ni
Resistance50 Ω
Tolerance±5 %

Absolute Ratings


Power	60 W
Frequency	4.0 GHz
VSWR	.1.2 Maximum

Packaging100 pcs./box

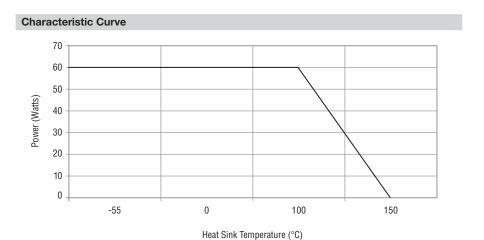


Product Dimensions

Version C

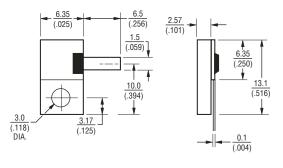

Version D



DIMENSIONS = MILLIMETERS

BOURNS

Reliable Electronic Solutions

Asia-Pacific:

Tel: +886-2 2562-4117 Fax: +886-2 2562-4116

Europe:

Tel: +41-41 768 5555 Fax: +41-41 768 5510 **The Americas:** Tel: +1-951 781-5500

Tel: +1-951 781-5500 Fax: +1-951 781-5700 www.bourns.com

How To Order

	CHF 5225 C N F 500
Model -	
Size —	
Version —	
Substrate —	
Mount F = Flange	
Value	
Function L = Termination	