

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China







ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	COMPONENT NOTES
1	50-00090	Connector, dc plug, 6.5x3.0x24 mm, molding style	1	
2	50-00091	Connector, dc jack, 6.5x3.0xL19.7 mm, molding style	1	
3	30-00395	Wire, 2C TS, 18 AWG, UL2468, 300V, 80C, 4.4 mm, VW-1, PVC, 87A	1	
4	24-00259	Overmold, 90°, 6.5 mm, dc plug, PVC	1	black
5	24-00233	Overmold, 6.5x3.0 dc jack, PVC	1	black

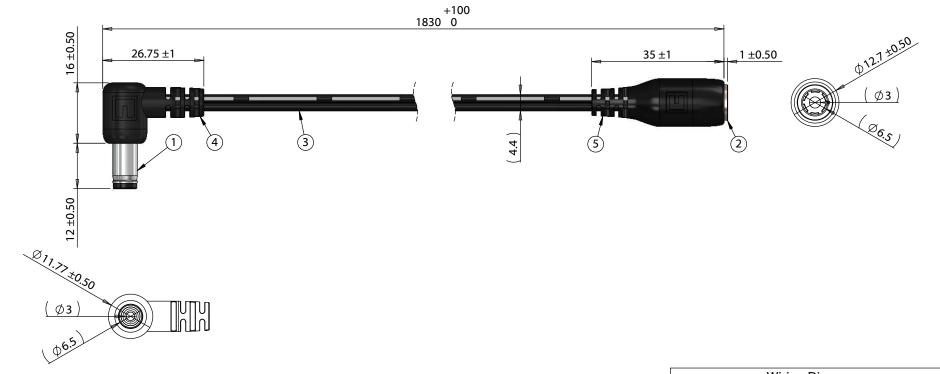

Notes:

Functionally equivalent components may be substituted

	Wiring Diagram	1
50-00090	wire color	50-00091
center	black with stripe	center
sleeve	black	sleeve

Revision:	Date:	Description:	Prepared:	Notes:	T			
A A	01/19/2018	Initial release	GL Digitally signed by GL Date: 2018.02.14 09:52:38 -08'00'	RoHS and REACH compliant	T	TENSILITY tel 1.541.323.3228 800 877.670.7118 800 tensility.com		
			Verified: AW Digitally signed by AW Date: 2018.02.14 11:17:53-08'00' Dimensions are in	Function test: no open, no short circuit, no intermittent	tei			
			millimeters. Tolerances: X: ± 0.5 mm	Description: Cable, 1830 mm, 6.5x3.0x12 mm 90° 50-00090 dc plug to 6.5x3.0 mm 50-00091 dc jack, 18 AWG,		Size: Part number: A 10-02539		
			X.X: ± 0.3 mm X.XX: ± 0.05 mm	UL2468	Scale:	1:1		Sheet 1 of 1
5 4		4	3				1	