



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Series 22

Characteristics

The compact Series 22 is especially suited for:

- Flush design

The large rectangular design (24x36mm) features a large illuminated area.

Functions

The Series 22 incorporates the following functions:

- Indicator
- Illuminated pushbutton
- Mushroom-head pushbutton
- Key lock switch

Market segments

The EAO Series 22 is especially suited for applications in the segments:

- Public transportation
- Machinery and Automation
- Panel building

Please refer to the EAO website to obtain detailed information regarding this series www.products.eao.com
Configure a product to your exact needs and request a quotation.



Overview**Flush design**

Indicator	4
Illuminated pushbutton	5
Mushroom-head pushbutton	7
Keylock switch	9

Accessories	11
--------------------	-----------

Technical data	18
-----------------------	-----------


Marking	19
----------------	-----------

Application guidelines	20
-------------------------------	-----------


Index	21
--------------	-----------

22 Flush design

Indicator, IP 65

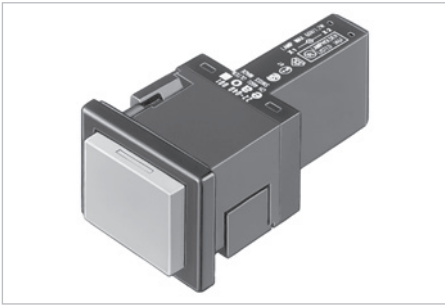


Product can differ from the current configuration.

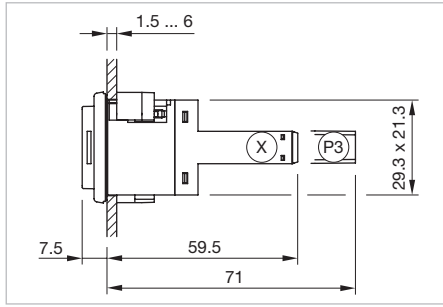

Dimensions [mm]
 P3 = Plug-in terminal 6.3 x 0.8 mm,
 X = Screw terminal


Additional Information

- For front dimension 24 x 36 mm

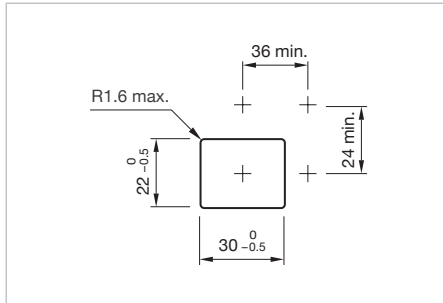


Mounting cut-outs [mm]


Equipment consisting of (schematic overview)

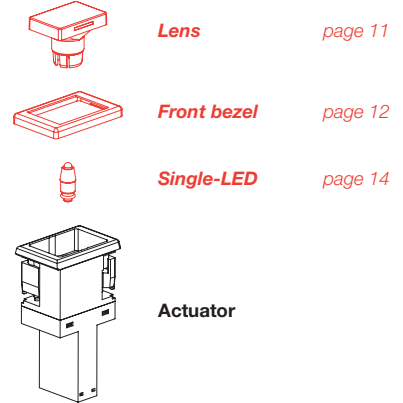

Each Part Number listed below includes all the black components shown in the 3D-drawing.


To obtain a complete unit, please select the red components from the pages shown.

Terminal	Part No.	Wiring diagram	Weight
 <p>Indicator actuator</p>			
Screw	22-040.001	1	0.022 kg
Plug 6.3 x 0.8 mm	22-040.004	1	0.019 kg




Illuminated pushbutton, IP 65

Equipment consisting of (schematic overview)

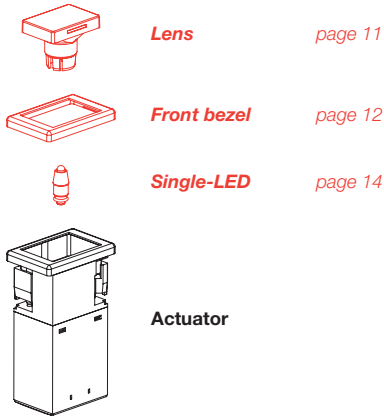


Each Part Number listed below includes all the black components shown in the 3D-drawing.


To obtain a complete unit, please select the red components from the pages shown.

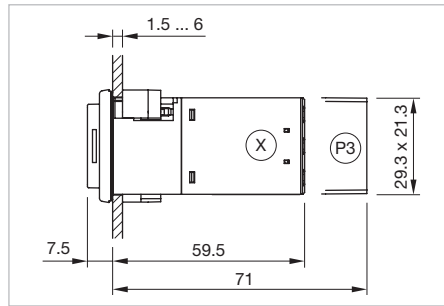

Dimensions [mm]
P3 = Plug-in terminal 6.3 x 0.8 mm,
X = Screw terminal

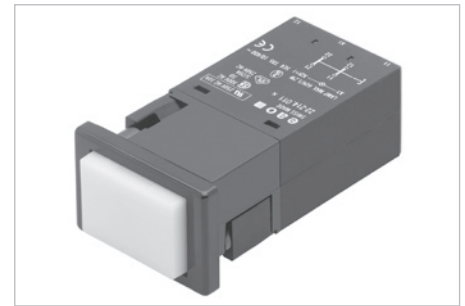


Product can differ from the current configuration.

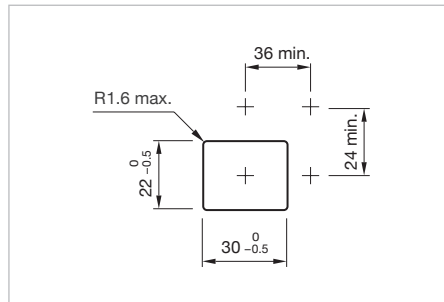

Mounting cut-outs [mm]



Additional Information

- For front dimension 24 x 36 mm
- Switching system snap-action element

Contacts	Switching action	Terminal	Part No.	Wiring diagram	Weight
 Illuminated pushbutton actuator					
1 NC	B	Screw	22-212.011	1	0.037 kg
		Plug 6.3 x 0.8 mm	22-212.014	1	0.032 kg
1 NC + 1 NO	B	Screw	22-215.011	3	0.044 kg
		Plug 6.3 x 0.8 mm	22-215.014	3	0.034 kg
	C	Screw	22-225.011	4	0.044 kg
		Plug 6.3 x 0.8 mm	22-225.014	4	0.034 kg
1 NO	B	Screw	22-211.011	5	0.037 kg
		Plug 6.3 x 0.8 mm	22-211.014	5	0.032 kg
	C	Screw	22-221.011	6	0.037 kg
		Plug 6.3 x 0.8 mm	22-221.014	6	0.032 kg
2 NC	B	Screw	22-214.011	7	0.044 kg
		Plug 6.3 x 0.8 mm	22-214.014	7	0.034 kg
	C	Screw	22-224.011	8	0.044 kg
		Plug 6.3 x 0.8 mm	22-224.014	8	0.034 kg
2 NO	B	Screw	22-213.011	9	0.044 kg
		Plug 6.3 x 0.8 mm	22-213.014	9	0.034 kg
	C	Screw	22-223.011	10	0.044 kg
		Plug 6.3 x 0.8 mm	22-223.014	10	0.044 kg


Contacts: NC = Normally closed, NO = Normally open
Switching action: B = Momentary, C = Maintain

22 Flush design

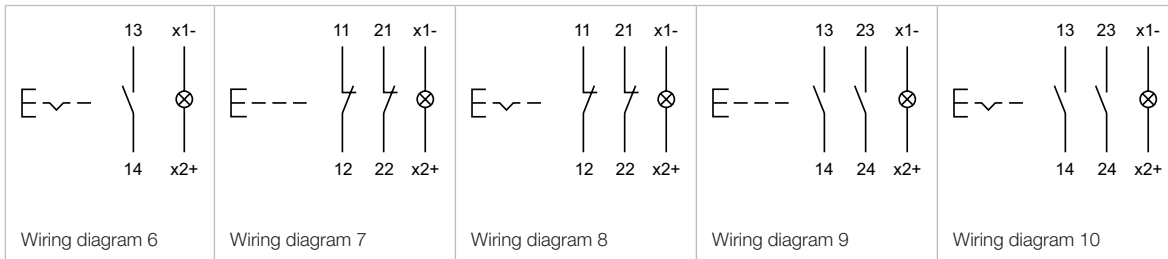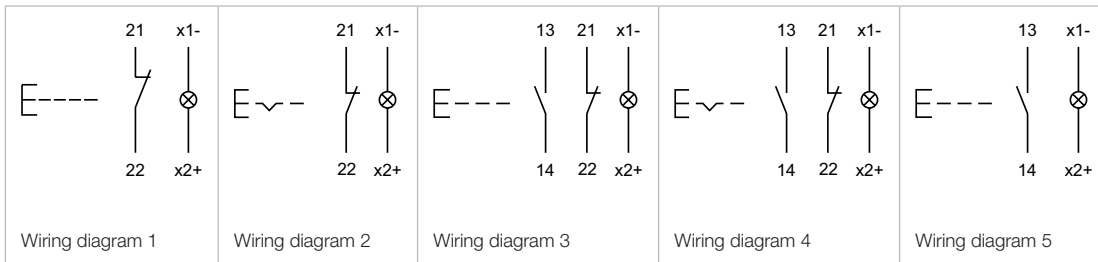


Mushroom-head pushbutton, IP 65


Equipment consisting of (schematic overview)



Mushroom-head cap page 11




Front bezel page 12




Actuator

Each Part Number listed below includes all the black components shown in the 3D-drawing.


To obtain a complete unit, please select the red components from the pages shown.

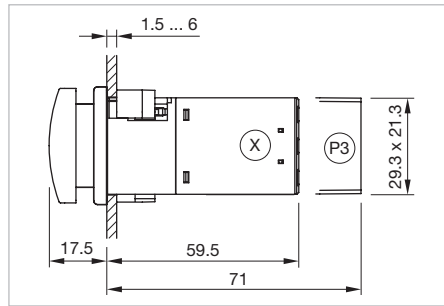

Dimensions [mm]
P3 = Plug-in terminal 6.3 x 0.8 mm,
X = Screw terminal

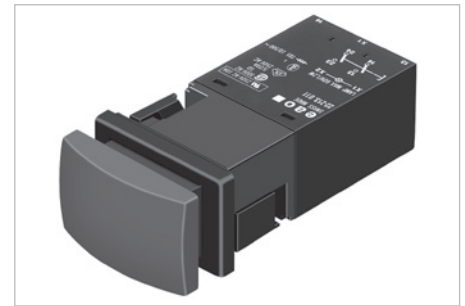


Product can differ from the current configuration.

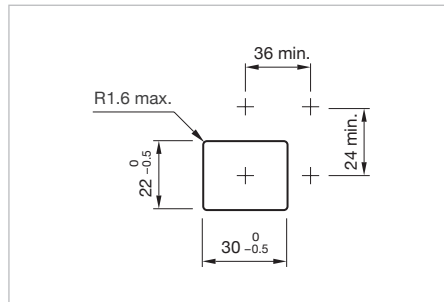

Mounting cut-outs [mm]



Additional Information

- For front dimension 24 x 36 mm
- Switching system snap-action element



Contacts	Switching action	Terminal	Part No.	Wiring diagram	Weight
 Mushroom-head pushbutton actuator					
1 NC	B	Screw	22-212.011	1	0.037 kg
		Plug 6.3 x 0.8 mm	22-212.014	1	0.032 kg
1 NC + 1 NO	B	Screw	22-222.011	2	0.037 kg
		Plug 6.3 x 0.8 mm	22-215.011	3	0.034 kg
	C	Screw	22-225.011	4	0.044 kg
		Plug 6.3 x 0.8 mm	22-225.014	4	0.034 kg
1 NO	B	Screw	22-211.011	5	0.037 kg
		Plug 6.3 x 0.8 mm	22-211.014	5	0.032 kg
	C	Screw	22-221.011	6	0.037 kg
		Plug 6.3 x 0.8 mm	22-221.014	6	0.032 kg
2 NC	B	Screw	22-214.011	7	0.044 kg
		Plug 6.3 x 0.8 mm	22-214.014	7	0.034 kg
	C	Screw	22-224.011	8	0.044 kg
		Plug 6.3 x 0.8 mm	22-224.014	8	0.034 kg
2 NO	B	Screw	22-213.011	9	0.044 kg
		Plug 6.3 x 0.8 mm	22-213.014	9	0.034 kg
	C	Screw	22-223.011	10	0.044 kg
		Plug 6.3 x 0.8 mm	22-223.014	10	0.044 kg

Contacts: NC = Normally closed, NO = Normally open
Switching action: B = Momentary, C = Maintain

22 Flush design

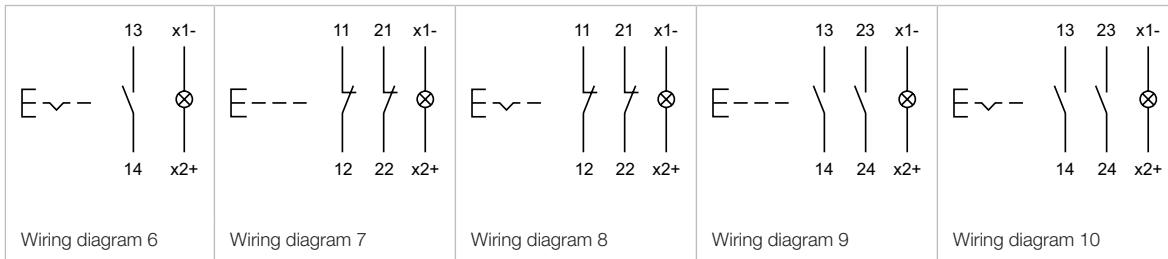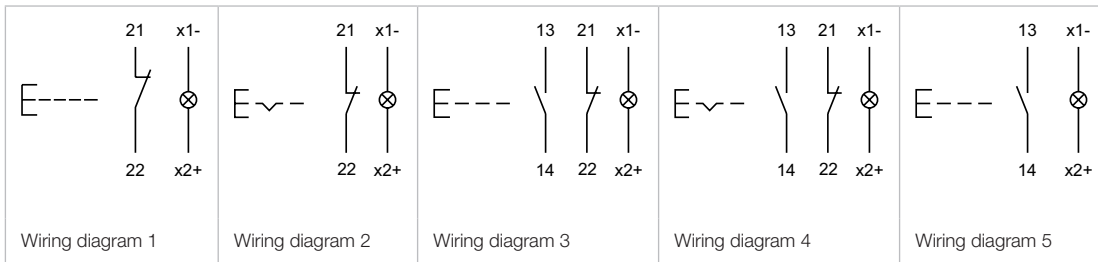


Keylock switch 2 positions, IP 65

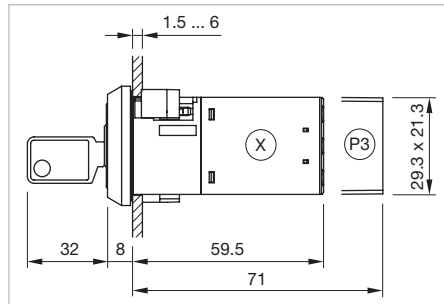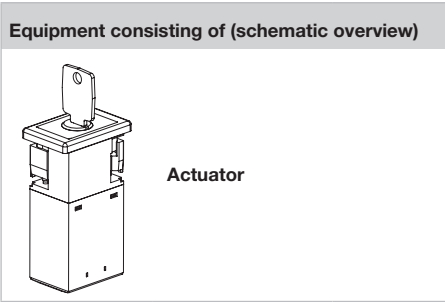

Each Part Number listed below includes all the black components shown in the 3D-drawing.

Dimensions [mm]
 P3 = Plug-in terminal 6.3 x 0.8 mm,
 X = Screw terminal


Product can differ from the current configuration.

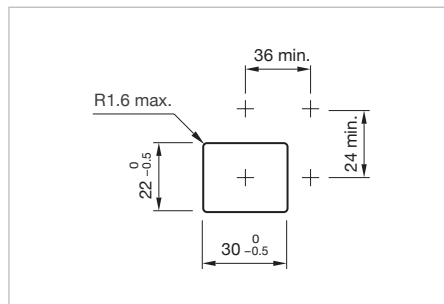


Mounting cut-outs [mm]

Additional Information

- Front plastic black
- Switching system snap-action element
- The standard lock: DOM 311
- Two keys are supplied with each key lock switch
- Optional lock numbers on request





Switching positions (A = Rest, B = Momentary, C = Maintained)

Contacts	Switching action	Switching angle	Key remove	Terminal	Part No.	Wiring diagram	Weight
 <p>Keylock switch 2 positions, Front dimension 24 x 36 mm</p>							
1 NC + 1 NO	A - B	B = 45°	A	Screw	22-355.111D	1	0.051 kg
1 NO	A - B	B = 45°	A	Screw	22-351.111D	2	0.051 kg
2 NO	A - B	B = 45°	A	Screw	22-353.111D	3	0.051 kg
1 NC + 1 NO	A - C	C = 90°	A	Screw	22-335.111D	4	0.051 kg
			C	Screw	22-335.311D	4	0.051 kg
			A + C	Screw	22-335.511D	4	0.051 kg
			C	Plug 6.3 x 0.8 mm	22-335.314D	4	0.046 kg
			A + C	Plug 6.3 x 0.8 mm	22-335.514D	4	0.046 kg
1 NO	A - C	C = 90°	A	Screw	22-331.111D	5	0.051 kg
			C	Screw	22-331.311D	5	0.044 kg
			A + C	Screw	22-331.511D	5	0.044 kg
			A	Plug 6.3 x 0.8 mm	22-331.114D	5	0.046 kg
			A + C	Plug 6.3 x 0.8 mm	22-331.514D	5	0.040 kg

22 Flush design


Contacts	Switching action	Switching angle	Key remove	Terminal	Part No.	Wiring diagram	Weight
2 NO	A - C	C = 90°	A	Screw	22-333.111D	6	0.051 kg
			C	Screw	22-333.311D	6	0.051 kg
			A + C	Screw	22-333.511D	6	0.051 kg
			A	Plug 6.3 x 0.8 mm	22-133.314D	6	0.046 kg
			A + C	Plug 6.3 x 0.8 mm	22-333.514D	6	0.046 kg

Contacts: NC = Normally closed, NO = Normally open
 Switching action: B = Momentary, C = Maintain

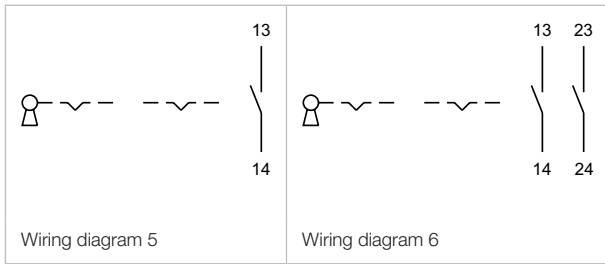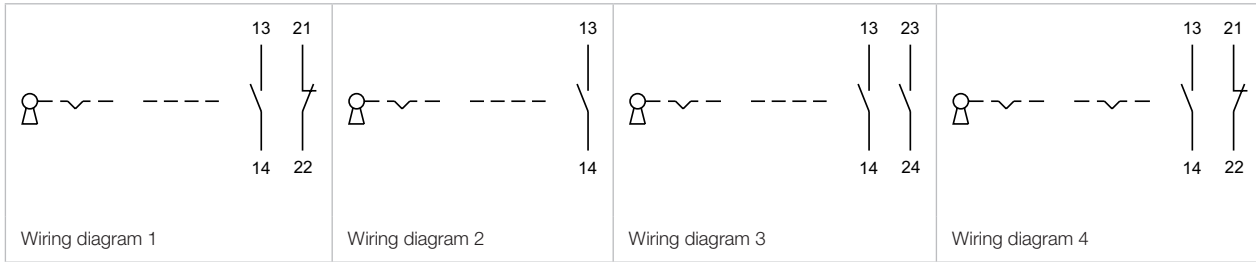

Front


Lens plastic

Product attribute	Dimension	Lens	Part No.	Weight		
 <p>Lens plastic</p>	17 x 25.5 mm	smoked transparent	22-903.1	0.003 kg		
		red transparent	22-903.2	0.003 kg		
illuminative	17 x 25.5 mm	orange transparent	22-903.3	0.003 kg		
		yellow transparent	22-903.4	0.003 kg		
		green transparent	22-903.5	0.003 kg		
		blue transparent	22-903.6	0.003 kg		
		colourless transparent	22-903.7	0.003 kg		
		illuminative, not suitable for film insert, bright LEDs are visible	17 x 25.5 mm	red translucent	22-901.2	0.003 kg
				orange translucent	22-901.3	0.003 kg
yellow translucent	22-901.4			0.003 kg		
green translucent	22-901.5			0.003 kg		
blue translucent	22-901.6			0.003 kg		
white translucent	22-901.9			0.003 kg		
illuminative, less suitable for film insert	17 x 25.5 mm	red transparent	22-905.2	0.003 kg		
		yellow transparent	22-905.4	0.003 kg		
		green transparent	22-905.5	0.003 kg		
		colourless transparent	22-905.7	0.003 kg		
non-illuminative	17 x 25.5 mm	black opaque	22-901.0	0.003 kg		
		grey opaque	22-901.8	0.003 kg		

Mushroom-head cap

Additional Information

- Non-illuminative
- Use only flush front bezel


Dimension	Mushroom-head cap	Part No.	Weight	
 <p>Mushroom-head cap</p>	23 x 35 mm	Plastic black	22-930.0	0.006 kg
		Plastic red	22-930.2	0.006 kg
		Plastic yellow	22-930.4	0.006 kg
		Plastic green	22-930.5	0.006 kg

22 Accessories

Front bezel flush

Additional Information

- Lens only removable with lens remover
Part No. 02-905

Front bezel	Part No.	Weight
 <p>Front bezel flush, Front dimension 24 x 36 mm</p>		
Pastic black	02-965.0	0.001 kg

Front bezel raised

Additional Information


- Lens only removable with lens remover
Part No. 98-969

Front bezel	Part No.	Weight
 <p>Front bezel raised, Front dimension 24 x 36 mm</p>		
Pastic black	02-967.0	0.001 kg


Protective cover, IP 65

Additional Information


- The dimensions of the mounting cut-outs are shown in the product details
- Use only flush front bezel
- Hinged, with means for sealing
- Front panel thickness reduces by 2 mm
- Please not that bigger minimum distances are necessary

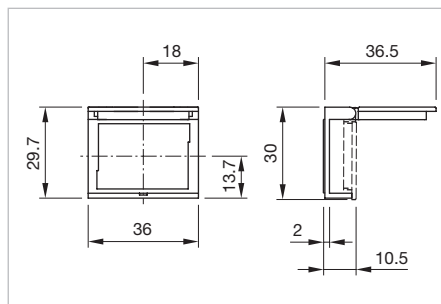

Dimensions [mm]

Mounting cut-out	Material	Optics	Part No.	Weight
 <p>Protective cover</p>				
22 x 30 mm	Plastic	transparent	22-925	0.004 kg


Blind plug

Dimension	Mounting cut-out	Material	Colour	Part No.	Weight
 <p>Blind plug</p>					
24 x 36 mm	Ø 16 mm	Plastic	black	22-949.0	0.005 kg

Master key

Additional Information

- For standard lock: DOM 311 ... 445

Part No.	Weight
 <p>Master key</p>	
31-989.300	0.006 kg

Spare key

Additional Information


- For standard lock: DOM 311
- Optional lock numbers on request

Part No.	Weight
 <p>Spare key</p>	
31-989.311	0.006 kg


Single-LED, T1 3/4 MG

Additional Information


- When using AC/DC types with AC operation, slight flickering can occur
- Luminous intensity data of the LEDs on direct voltage
- Electrical and optical data are measured at 25 °C
- The specified versions are built with a protection diode (half wave rectifier) in series and the LED
- Luminosity and wave length scattering caused by LED manufacturing processes may cause slight variations in the illumination
- For supply voltages above 48V, a voltage reduction element (external series resistor or transformer) must be used
- Due to high surface temperatures, the series resistor must not be soldered directly to the terminals of the equipment (use a terminal plate)
- If the 24VDC Bi-colour lamp is driven with normal polarity (plus on middle contact of the lamp) the first mentioned colour will light up, with inverted polarity the second colour will light up

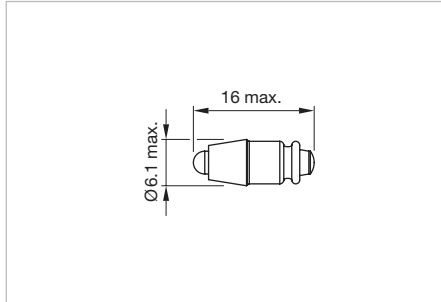

Dimensions [mm]

LED colour	Operating voltage	Operation current	Lumi. intensity	Dom. wavelength	Part No.	Weight
 <p>Single-LED</p>						
red	6 VDC +10 %	15 mA ±15 %	350 mcd	630 nm	10-2J06.3142	0.002 kg
	12 VAC/DC +10 %	7/14 mA ±15 %	330 mcd	630 nm	10-2J09.1062	0.002 kg
	24 VAC/DC +10 %	7/14 mA ±15 %	330 mcd	630 nm	10-2J12.1062	0.002 kg
	28 VAC/DC +10 %	7/14 mA ±15 %	330 mcd	630 nm	10-2J13.1062	0.002 kg
	48 VAC/DC +10 %	4/8 mA ±15 %	200 mcd	630 nm	10-2J19.1042	0.002 kg
yellow	6 VDC +10 %	15 mA ±15 %	300 mcd	587 nm	10-2J06.3144	0.002 kg
	12 VAC/DC +10 %	7/14 mA ±15 %	280 mcd	587 nm	10-2J09.1064	0.002 kg
	24 VAC/DC +10 %	7/14 mA ±15 %	280 mcd	587 nm	10-2J12.1064	0.002 kg
	28 VAC/DC +10 %	7/14 mA ±15 %	280 mcd	587 nm	10-2J13.1064	0.002 kg
	48 VAC/DC +10 %	4/8 mA ±15 %	180 mcd	587 nm	10-2J19.1044	0.002 kg
green	6 VDC +10 %	7 mA ±15 %	1050 mcd	525 nm	10-2J06.3145	0.002 kg
	12 VAC/DC +10 %	4/7 mA ±15 %	1050 mcd	525 nm	10-2J09.1065	0.002 kg
	24 VAC/DC +10 %	4/7 mA ±15 %	1050 mcd	525 nm	10-2J12.1065	0.002 kg
	28 VAC/DC +10 %	4/7 mA ±15 %	1050 mcd	525 nm	10-2J13.1065	0.002 kg
	48 VAC/DC +10 %	2/4 mA ±15 %	600 mcd	525 nm	10-2J19.1045	0.002 kg
blue	6 VDC +10 %	15 mA ±15 %	680 mcd	470 nm	10-2J06.3146	0.002 kg
	12 VAC/DC +10 %	7/14 mA ±15 %	650 mcd	470 nm	10-2J09.1066	0.002 kg
	24 VAC/DC +10 %	7/14 mA ±15 %	650 mcd	470 nm	10-2J12.1066	0.002 kg
	28 VAC/DC +10 %	7/14 mA ±15 %	650 mcd	470 nm	10-2J13.1066	0.002 kg
	48 VAC/DC +10 %	4/8 mA ±15 %	400 mcd	470 nm	10-2J19.1046	0.002 kg


LED colour	Operating voltage	Operation current	Lumi. intensity	Dom. wavelength	Part No.	Weight
white	6 VDC +10 %	6 mA ±15 %	900 mcd	x0.31/y0.32 nm	10-2J06.3149	0.002 kg
	12 VAC/DC +10 %	3/6 mA ±15 %	900 mcd	x0.31/y0.32 nm	10-2J09.1069	0.002 kg
	24 VAC/DC +10 %	2.5/5 mA ±15 %	750 mcd	x0.31/y0.32 nm	10-2J12.1069	0.002 kg
	28 VAC/DC +10 %	2.5/5 mA ±15 %	750 mcd	x0.31/y0.32 nm	10-2J13.1069	0.002 kg
	48 VAC/DC +10 %	2/4 mA ±15 %	600 mcd	x0.31/y0.32 nm	10-2J19.1049	0.002 kg



Bi-colour LED

Bi-colour LED red/green	24 VDC +10 %	15/14 mA ±15 %	600/630 mcd	625/525 nm	10-A312.314A	0.002 kg
-------------------------	--------------	----------------	-------------	------------	---------------------	----------


Filament lamp, T1 3/4 MG

Operating voltage	Operation current	Part No.	Weight
 <p>Filament lamp</p>			
6 VAC/DC	120 mA ±10 %	10-1306.1349	0.001 kg
6.3 VAC/DC	200 mA ±10 %	10-1307.1369	0.001 kg
12 VAC/DC	75 mA ±10 %	10-1309.1309	0.001 kg
14 VAC/DC	80 mA ±10 %	10-1310.1319	0.001 kg
18 VAC/DC	40 mA ±10 %	10-1311.1249	0.001 kg
24 VAC/DC	35 mA ±10 %	10-1312.1229	0.001 kg
28 VAC/DC	30 mA ±10 %	10-1313.1209	0.001 kg
28 VAC/DC	40 mA ±10 %	10-1313.1249	0.001 kg
36 VAC/DC	20 mA ±10 %	10-1316.1179	0.001 kg
36 VAC/DC	30 mA ±10 %	10-1316.1209	0.001 kg
48 VAC/DC	20 mA ±10 %	10-1319.1179	0.001 kg
48 VAC/DC	25 mA ±10 %	10-1319.1199	0.001 kg

Series resistor

Additional Information


- Only for filament lamp 48 VAC, 25 mA
- For lamp voltage reduction
- Keep to the country specific safety instructions
- Due to high surface temperatures, the series resistors must be soldered directly to the terminals of the equipment (use a terminal plate)

Operating voltage	Resistance	Part No.	Weight
 <p>Series resistor</p>			
110 VAC	2.7 kOhm	02-904.0	0.003 kg
125 VAC	3.3 kOhm	02-904.1	0.003 kg
145 VAC	4.7 kOhm	02-904.3	0.003 kg
240 VAC	10 kOhm	02-904.7	0.003 kg

Terminal plate empty



Additional Information

- For fitting with series resistors

Product attribute	Dimension	Part No.	Weight
 <p>Terminal plate empty</p>			
5 spaces	62.5 x 60 x 15 mm	02-912.1	0.025 kg
10 spaces	125 x 60 x 15 mm	02-912.2	0.045 kg
15 spaces	187.6 x 60 x 15 mm	02-912.3	0.090 kg
20 spaces	250 x 60 x 15 mm	02-912.4	0.095 kg

Mounting


Lens remover

Product attribute	Part No.	Weight
 <p>Lens remover</p>		
for flush front bezel	02-905	0.011 kg
 <p>Lens remover</p>		
for raised front bezel	98-968	0.004 kg

Lamp remover

Additional Information


▲ **Caution:** A switching process might be released when replacing the lamp

Part No.	Weight
 <p>Lamp remover</p>	
61-9740.0	0.003 kg

Dismantling tool

Additional Information

- For dismantling the lens from the holder

Part No.	Weight
 <p>Dismantling tool</p>	
22-938	0.030 kg

Actuator with snap-action switching element

Switching system

Self-cleaning, double-break, snap-action switching system (with contact gap 2 x 1.5 mm).
Max. 2 normally closed or 2 normally open contacts, or one of each.

Material

Lens

Polymethylmethacrylate PMMA, as per UL 94 HB, Polycarbonate (PC), as per UL 94 V0

Front bezel

Polyphenylenoxide (PPO)

Material of contact

Hard silver

Actuator housing

Polyamide (PA), Polytherimide (PEI)

Mechanical characteristics

Terminals

Screw terminal (with self-lifting clip):
Max. wire cross-section 2 x 2.5 mm²
Max. wire cross-section of stranded cable 2 x 1.5 mm²

Plug-in terminal 6.3 x 0.8 mm

Actuating force

with 1 switching element 3.6 N ± 0.3 N
with 2 switching elements 6.8 N ± 0.3 N

Actuating travel

5.5 mm ± 0.2 mm

Travel

3 mm

Rebound time

≤ 3 ms

Mechanical lifetime

Illuminated pushbutton 1 million operations
Keylock switch 40 000 operations

Electrical characteristics

Contact resistance

Starting value ≤ 50 mΩ, as per IEC 60512-2-4

Isolation resistance

≥ 100 MΩ between all contacts at 100 VDC, as per IEC 60512-3-1

Switch rating

Power rating
min. 12 VAC, 50 mA
max. 400 VAC, 10 A

Switch rating AC (cos φ 0.7), service category AC-15
Voltage 125 VAC 250 VAC 380 VAC
Current 8 A 5 A 3 A
Operations ≥ 100 000

Switch rating DC (inductive) L:R = 30 ms, service category DC-13
Voltage 24 V 60 V 110 V 220 V
Current 6 A 1.5 A 0.4 A 0.2 A
Operations ≥ 100 000

Electric strength

2500 VAC, 50 Hz, 1 min. between all terminals and earth, as per IEC 60512-2-11.

Environmental conditions

Storage temperature

-40 °C ... +95 °C

Service temperature

-25 °C ... +85 °C

Protection degree

Terminal/case IP 20
Front IP 65 as per IEC 60529

Shock resistance

50 g for 11 ms, as per IEC 60512-4-3

Vibration resistance

(sinusoidal)
10 g at 10 Hz ... 2000 Hz, amplitude 0.75 mm, as per IEC 60512-4-4

Approvals

Approbations

CB (IEC 61058)
CSA
ENEC (EN 61058)
UL

Declaration of conformity

CE

General notes

1. Engraving

In addition to the most commonly used world languages, in DIN1451-3 close spacing, other typefaces are available as Scandinavian, Slavic, Greek, Russian and Polish. Red, blue and black lenses are filled with white colour. Other colour lenses are filled in black. Standard height of letters is 3 mm. If the height is not specified, we will supply 3 mm engraved letters.

2. Hot stamping



For larger series it is worth considering markings by means of hot stamping. We will be pleased to advise you. For letters and figures, typefaces with 2.5 mm, 3 mm and 4 mm are available.

3. Film inserts

Instead of using engraving the lenses can be fitted with transparent film inserts, as an alternative. For this purpose, though, it is advisable to use transparent lenses. In the case of use of a smoke-black lens the fitted film becomes readable only if the lamp is on. The film thickness is 0.2 mm. Important : Consider push-button mounting orientation before specifying engraving characters!



Alle Dimensionen in mm

Film insert max. size	Height of letters h	Number of lines	Number of capital letters per line (target value)	Number of small letters per line (target value)	Image
14.3 x 22.4	3	4	11	13	B1
			7-8	8-9	B2
	4	2	7	9	B1
			4	5-6	B2
	5	2	5-6	6-7	B1
			3	4	B2
	6	1	5	6	B1
			3	4	B2
	8	1	3	4	B1
			2	2	B2



B1

B2



22 Application guidelines

Suppressor circuits


When switching inductive loads such as relays, DC motors, and DC solenoids, it is always important to absorb surges (e.g. with a diode) to protect the contacts. When these inductive loads are switched off, a counter emf can severely damage switch contacts and greatly shorten lifetime.

Fig. 1 shows an inductive load with a free-wheeling diode connected in parallel. This free-wheeling diode provides a path for the inductor current to flow when the current is interrupted by the switch. Without this free-wheeling diode, the voltage across the coil will be limited only by dielectric breakdown voltages of the circuit or parasitic elements of the coil. This voltage can be kilovolts in amplitude even when nominal circuit voltages are low (e.g. 12VDC) see Fig. 2.


The free-wheeling diode should be chosen so that the reverse breakdown voltage is greater than the voltage driving the inductive load. The DC blocking voltage (V_R) of the free-wheeling diode can be found in the datasheet of a diode. The forward current should be equal or greater than the maximum current flowing through the load.

To get an efficient protection, the free-wheeling diode must be connected as close as possible to the inductive load!

Switching with inductive load
Fig. 1

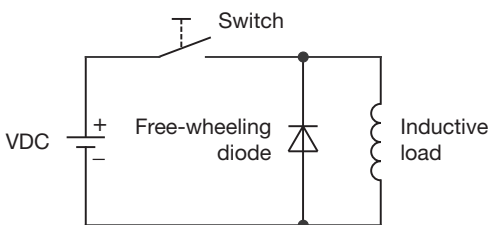

Counter EMF
over load without free-wheeling diode
Fig. 2

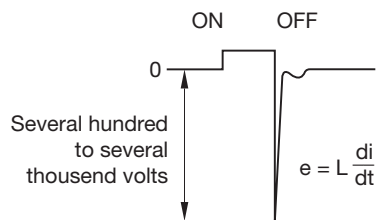

Index from Part No.

Part No.	Page	Part No.	Page
02-904.0	16	22-223.011	5
02-904.1	16	22-223.011	7
02-904.3	16	22-223.014	5
02-904.7	16	22-223.014	7
02-905	17	22-224.011	5
02-912.1	16	22-224.011	7
02-912.2	16	22-224.014	5
02-912.3	16	22-224.014	7
02-912.4	16	22-225.011	5
02-965.0	12	22-225.011	7
02-967.0	12	22-225.014	5
10-1306.1349	15	22-225.014	7
10-1307.1369	15	22-331.111D	9
10-1309.1309	15	22-331.114D	9
10-1310.1319	15	22-331.311D	9
10-1311.1249	15	22-331.511D	9
10-1312.1229	15	22-331.514D	9
10-1313.1209	15	22-333.111D	10
10-1313.1249	15	22-333.114D	10
10-1316.1179	15	22-333.311D	10
10-1316.1209	15	22-333.511D	10
10-1319.1179	15	22-333.514D	10
10-1319.1199	15	22-335.111D	9
10-2J06.3142	14	22-335.311D	9
10-2J06.3144	14	22-335.314D	9
10-2J06.3145	14	22-335.511D	9
10-2J06.3146	14	22-335.514D	9
10-2J06.3149	15	22-351.111D	9
10-2J09.1062	14	22-353.111D	9
10-2J09.1064	14	22-355.111D	9
10-2J09.1065	14	22-901.0	11
10-2J09.1066	14	22-901.2	11
10-2J09.1069	15	22-901.3	11
10-2J12.1062	14	22-901.4	11
10-2J12.1064	14	22-901.5	11
10-2J12.1065	14	22-901.6	11
10-2J12.1066	14	22-901.8	11
10-2J12.1069	15	22-901.9	11
10-2J13.1062	14	22-903.1	11
10-2J13.1064	14	22-903.2	11
10-2J13.1065	14	22-903.3	11
10-2J13.1066	14	22-903.4	11
10-2J13.1069	15	22-903.5	11
10-2J19.1042	14	22-903.6	11
10-2J19.1044	14	22-903.7	11
10-2J19.1045	14	22-905.2	11
10-2J19.1046	14	22-905.4	11
10-2J19.1049	15	22-905.5	11
10-A312.314A	15	22-905.7	11
22-040.001	4	22-925	12
22-040.004	4	22-930.0	11
22-211.011	5	22-930.2	11
22-211.011	7	22-930.4	11
22-211.014	5	22-930.5	11
22-211.014	7	22-938	17
22-212.011	5	22-949.0	13
22-212.011	7	31-989.300	13
22-212.014	5	31-989.311	13
22-212.014	7	61-9740.0	17
22-213.011	5	98-968	17
22-213.011	7		
22-213.014	5		
22-213.014	7		
22-214.011	5		
22-214.011	7		
22-214.014	5		
22-214.014	7		
22-215.011	5		
22-215.011	7		
22-215.014	5		
22-215.014	7		
22-221.011	5		
22-221.011	7		
22-221.014	5		
22-221.014	7		
22-222.011	5		
22-222.011	7		