

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China









#### **WINNIE-W**

 $\sim\!50^\circ$  wide beam. Holder with 35 mm screw hole distance according to Zhaga standard. Compatible with Bender Wirth 4xx Typ L5 connector.

#### **TECHNICAL SPECIFICATIONS:**

Dimensions Ø 49.8 mm
Height 19.3 mm
Fastening screw

white

Box size

Colour

Box weight 0 kg

Quantity in Box 364 pcs


ROHS compliant yes 1



### **MATERIAL SPECIFICATIONS:**

Component	Type	Material	Colour
WINNIE-W	Lens	PMMA	clear
WINNIE-HOLDER	Holder	PC	white



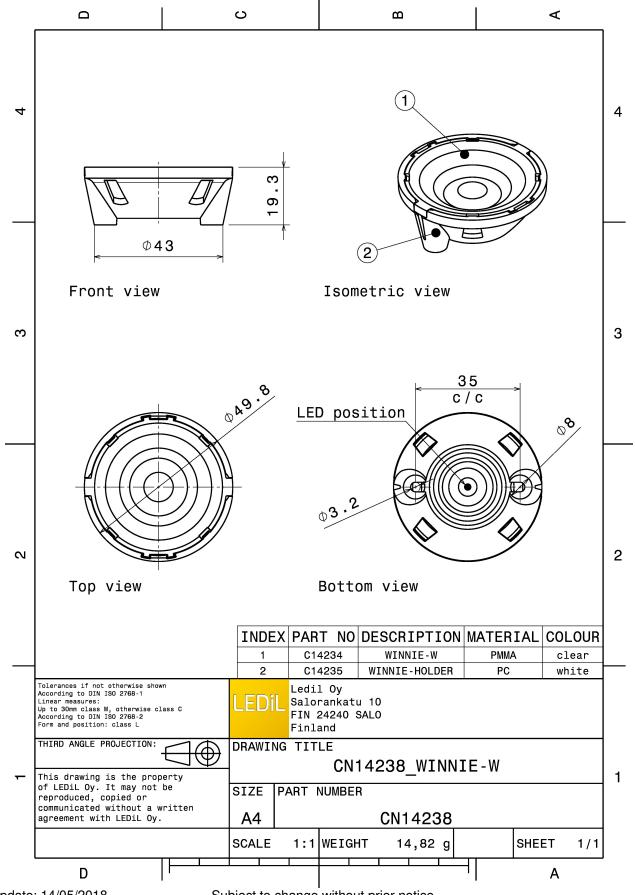


Last update: 14/05/2018 Subject to change without prior notice LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.


bridgelux.

LED V18 Gen6 FWHM 56.0° Efficiency 88 %

Peak intensity 0.820 cd/lm

Required components:





bridgelux.

LED V6 Gen6 FWHM 47.0° Efficiency 87 %

Peak intensity 1.200 cd/lm


Required components:



bridgelux.


LED V8 Gen6
FWHM 48.0°
Efficiency 88 %
Peak intensity 1.100 cd/lm


Required components:



bridgelux.

LED VERO10
FWHM 49.0°
Efficiency 90 %
Peak intensity 1.100 cd/lm
Required components:





## **CITIZEN**

Efficiency

LED CLL01x

**FWHM** 45.0° 87 %

Peak intensity 1.200 cd/lm

Required components:




## **CITIZEN**

LED CLL02x/CLU02x (LES10)

**FWHM** 46.0° Efficiency 87 % Peak intensity 1.600 cd/lm

Required components:




## **CITIZEN**

LED CLL02x/CLU02x (LES10)

**FWHM** 46.0° 87 % Efficiency Peak intensity 1.100 cd/lm Required components: Bender Wirth: 434 Typ L5







## **CITIZEN**

LED CLL03x/CLU03x

**FWHM** 48.0° 88 % Efficiency Peak intensity 1.000 cd/lm Required components: Bender Wirth: 433 Typ L5





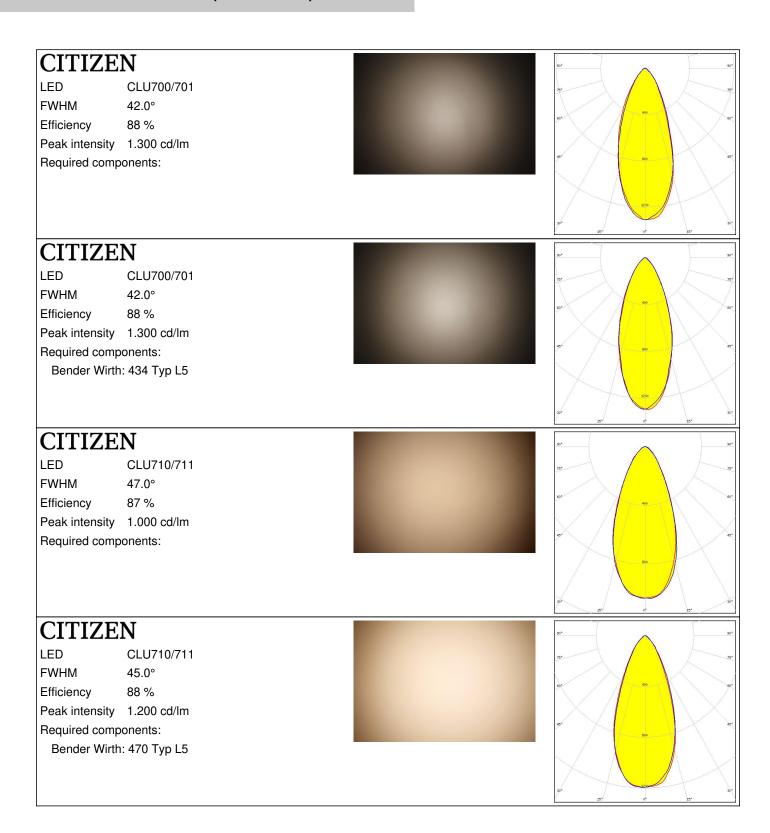


## **CITIZEN**

LED CLU720/721

FWHM 45.0° Efficiency 87 % Peak intensity 1.200 cd/lm Required components: Bender Wirth: 433 Typ L5







## CREE \$

LED CXA/B 13xx

FWHM 51.0° Efficiency 89 % Peak intensity 1.100 cd/lm

Required components:





## CREE \$

LED CXA/B 15xx


FWHM 52.0°
Efficiency 87 %
Peak intensity 1.100 cd/lm
Required components:




## CREE 💠

LED MHD-E/G FWHM 45.0° Efficiency 88 % Peak intensity 1.100 cd/lm

Required components:





#### PHOTOMETRIC DATA (MEASURED):



LED LUXEON CoB 1202/1203


FWHM 48.0°
Efficiency 88 %
Peak intensity 1.100 cd/lm
Required components:



#### **MUMILEDS**

LED LUXEON CoB 1202s

FWHM 46.0°
Efficiency 89 %
Peak intensity 1.300 cd/lm
Required components:



#### **ELUMINUS**

LED CXM-14
FWHM 50.0°
Efficiency 86 %

Peak intensity 1.000 cd/lm Required components:



## **ELUMINUS**

LED CXM-9
FWHM 48.0°
Efficiency 90 %
Peak intensity 1.300 cd/lm
Required components:



#### PHOTOMETRIC DATA (MEASURED):

## OSRAM Opto Semiconductors

LED Duris S10 **FWHM** 54.0°

Efficiency 88 %

Peak intensity 1.000 cd/lm

Required components:



## OSRAM Opto Semicond

LED Soleriq P13

49.0° **FWHM** Efficiency 86 %

Peak intensity 1.100 cd/lm

Required components:




## OSRAM Opto Semiconductors

LED Soleriq P6

**FWHM** 46.0° Efficiency 88 %

Peak intensity 1.200 cd/lm

Required components:



## OSRAM Opto Semiconductors

LED Soleriq P9

**FWHM** 48.0° 88 % Efficiency

Peak intensity 1.100 cd/lm

Required components:



#### OSRAM Opto Semiconductors

LED Soleriq S13

FWHM 49.0° Efficiency 87 %

Peak intensity 1.000 cd/lm

Required components:



#### OSRAM Opto Semiconductore

LED Soleriq S19

FWHM 50.0° Efficiency 84 %

Peak intensity 1.000 cd/lm

Required components:




## SAMSUNG

LED COB D Series LES 14.5 mm

FWHM 52.0°
Efficiency 85 %
Peak intensity 0.920 cd/lm
Required components:







## SAMSUNG


LED COB D Series LES 9.8 mm

FWHM 47.0°
Efficiency 88 %
Peak intensity 1.100 cd/lm
Required components:






#### PHOTOMETRIC DATA (MEASURED):

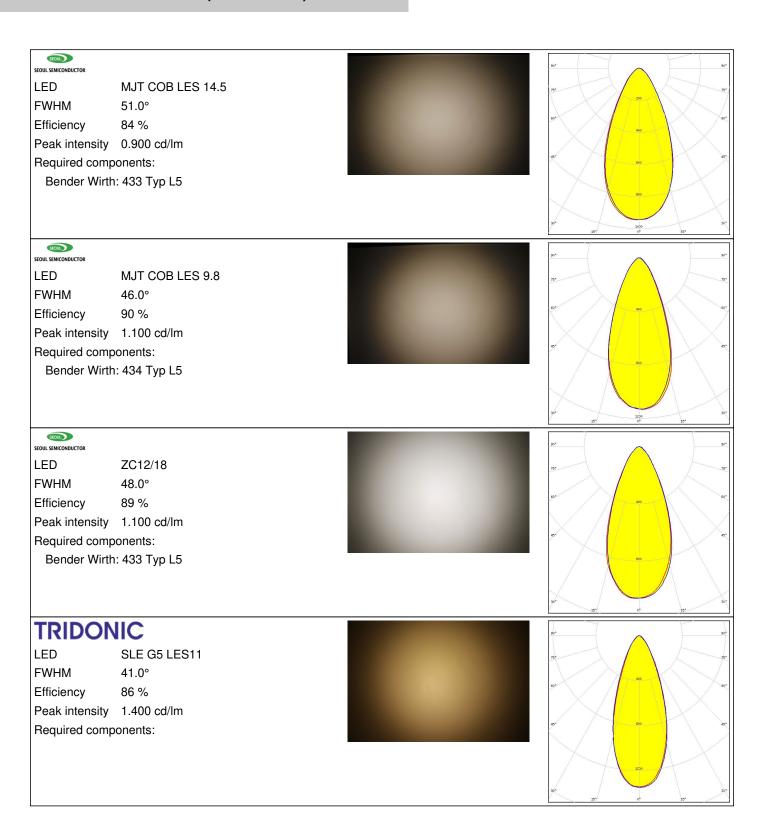

### PHOTOMETRIC DATA (MEASURED):

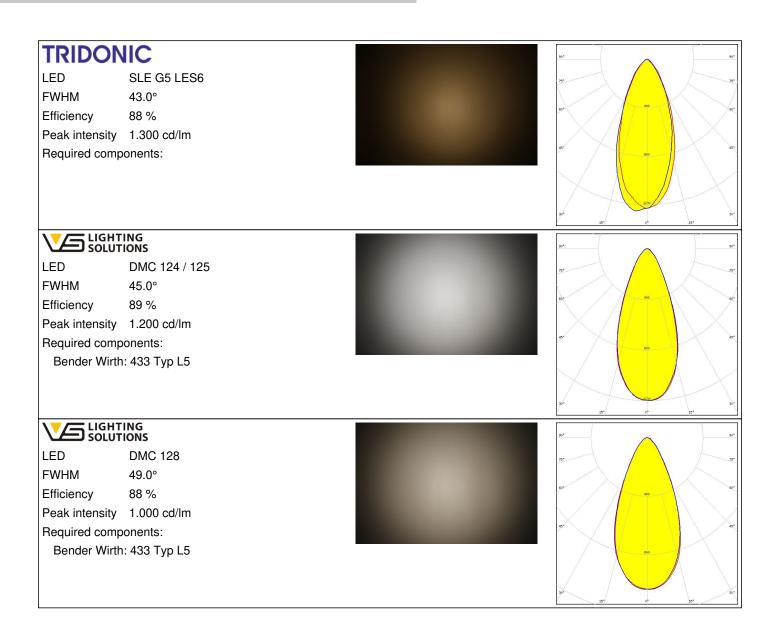

#### PHOTOMETRIC DATA (SIMULATED):

## **MUMILEDS**

LED LUXEON CoB Compact

FWHM 46.0° Efficiency 89 % Peak intensity 1.300 cd/lm

Required components:

#### **ELUMINUS**

LED CXM-14
FWHM 48.0°
Efficiency 88 %
Peak intensity 1.000 cd/lm

Required components: Bender Wirth: 433 Typ L5

## **ELUMINUS**


LED CXM-9
FWHM 46.0°
Efficiency 87 %
Peak intensity 1.100 cd/lm

Required components: Bender Wirth: 434 Typ L5

#### OSRAM Opto Semiconductors

LED Soleriq S9
FWHM 45.0°
Efficiency 90 %
Peak intensity 1.200 cd/lm

Required components:



#### PHOTOMETRIC DATA (SIMULATED):

## SAMSUNG


LED LC010C

FWHM 45.0° Efficiency 91 %

Peak intensity 1.200 cd/lm

Required components:

Bender Wirth: 479 Typ L5



## **SAMSUNG**


LED LC020C

FWHM 45.0° Efficiency 89 %

Peak intensity 1.200 cd/lm

Required components:

Bender Wirth: 479 Typ L5



## SAMSUNG


LED LC040C

FWHM 45.0° Efficiency 88 %

Peak intensity 1.200 cd/lm

Required components:

Bender Wirth: 479 Typ L5





LED ZC4/6 FWHM 46.0°

Efficiency 87 %

Peak intensity 1.100 cd/lm

Required components:

Bender Wirth: 434 Typ L5


### PHOTOMETRIC DATA (SIMULATED):

## **TRIDONIC**

LED SLE G6 LES10

FWHM 48.0°
Efficiency 91 %
Peak intensity 0.000 cd/lm
Required components:

Bender Wirth: 434 Typ L5




## **TRIDONIC**

LED SLE G6 LES15

FWHM 49.0° Efficiency 92 % Peak intensity 1.100 cd/lm

Required components: Bender Wirth: 433 Typ L5




## **TRIDONIC**

LED SLE G6 LES17

FWHM 48.0°
Efficiency 92 %
Peak intensity 1.140 cd/lm

Required components: Bender Wirth: 433 Typ L5





#### **GENERAL INFORMATION:**

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

Due to use of high power COB's with this product, special attention to proper thermal design is highly recommended. LEDiL has no liability for direct, indirect or consecutive damages arising from the LEDiL products being used outside of the recommended temperature range.

#### **MATERIALS:**

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

#### PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

#### **LEDIL Oy**

Joensuunkatu 13 FI-24240 SALO Finland

#### LEDiL Inc.

228 West Page Street Suite D Sycamore IL 60178 USA

## Local sales and technical support

www.ledil.com/ where\_to\_buy

#### **Shipping locations**

Salo, Finland Hong Kong, China

#### **Distribution Partners**

www.ledil.com/ where\_to\_buy