



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




**PACKAGE DIMENSIONS**

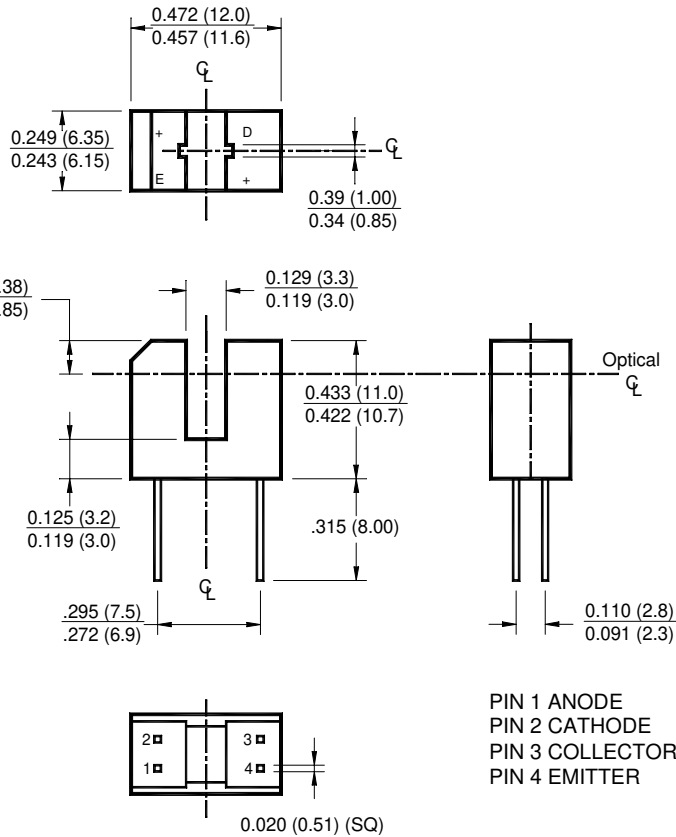


PIN 1 ANODE  
PIN 2 CATHODE  
PIN 3 COLLECTOR  
PIN 4 EMITTER

**NOTES:**

1. Dimensions for all drawings are in inches (mm).
2. Tolerance of  $\pm .010 (.25)$  on all non-nominal dimensions unless otherwise specified.

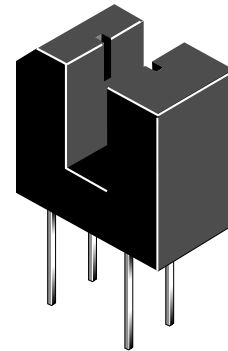

**SCHEMATIC**

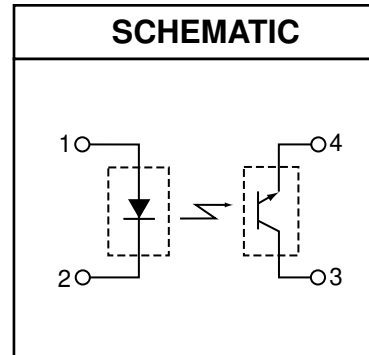

**DESCRIPTION**

The CNY36 is a gallium arsenide infrared emitting diode coupled with a silicon phototransistor in a plastic housing. The gap in the housing provides a means of interrupting the signal with tape, cards, shaft encoders, or other opaque material, switching the output from an "ON" to an "OFF" state.

**FEATURES**

- Opaque housing
- Low cost
- .035" apertures
- European "Pro Electron" registered

**ABSOLUTE MAXIMUM RATINGS** ( $T_A = 25^\circ\text{C}$  unless otherwise specified)

Parameter	Symbol	Rating	Unit
Operating Temperature	$T_{\text{OPR}}$	-55 to +85	$^\circ\text{C}$
Storage Temperature	$T_{\text{STG}}$	-55 to +85	$^\circ\text{C}$
Soldering Temperature (Iron) <sup>(3,4 and 5)</sup>	$T_{\text{SOL-I}}$	240 for 5 sec	$^\circ\text{C}$
Soldering Temperature (Flow) <sup>(3 and 4)</sup>	$T_{\text{SOL-F}}$	260 for 10 sec	$^\circ\text{C}$
<b>INPUT (EMITTER)</b>			
Continuous Forward Current	$I_F$	60	mA
Reverse Voltage	$V_R$	3	V
Power Dissipation <sup>(1)</sup>	$P_D$	100	mW
<b>OUTPUT (SENSOR)</b>			
Collector to Emitter Voltage	$V_{\text{CEO}}$	30	V
Emitter to Collector Voltage	$V_{\text{ECO}}$	5.0	V
Power Dissipation ( $T_C = 25^\circ\text{C}$ ) <sup>(1)</sup>	$P_D$	150	mW


**ELECTRICAL / OPTICAL CHARACTERISTICS** ( $T_A = 25^\circ\text{C}$ )(All measurements made under pulse condition)

PARAMETER	TEST CONDITIONS	SYMBOL	DEVICES	MIN	TYP	MAX	UNITS
<b>INPUT (EMITTER)</b>							
Forward Voltage	$I_F = 10 \text{ mA}$	$V_F$	All	—	—	1.7	V
Reverse Leakage Current	$V_R = 2 \text{ V}$	$I_R$	All	—	—	1.0	$\mu\text{A}$
<b>OUTPUT (SENSOR)</b>							
Emitter to Collector Breakdown	$I_E = 100 \mu\text{A}, E_e = 0$	$BV_{\text{ECO}}$	All	5.0	—	—	V
Collector to Emitter Breakdown	$I_C = 10 \text{ mA}, E_e = 0$	$BV_{\text{CEO}}$	All	30	—	—	V
Collector to Emitter Leakage	$V_{\text{CE}} = 10 \text{ V}, E_e = 0$	$I_{\text{CEO}}$	All	—	—	100	nA
<b>COUPLED</b>							
On-State Collector Current	$I_F = 20 \text{ mA}, V_{\text{CE}} = 10 \text{ V}$	$I_{\text{C(ON)}}$	All	2.0	—	—	mA
Saturation Voltage	$I_F = 20 \text{ mA}, I_C = 25 \mu\text{A}$	$V_{\text{CE(SAT)}}$	All	—	—	0.40	V
Turn-On Time	$I_F = 30 \text{ mA}, V_{\text{CC}} = 5 \text{ V}, R_L = 2.5 \text{ k}\Omega$	$t_{\text{on}}$	All	—	5	—	$\mu\text{s}$
Turn-Off Time	$I_F = 30 \text{ mA}, V_{\text{CC}} = 5 \text{ V}, R_L = 2.5 \text{ k}\Omega$	$t_{\text{off}}$	All	—	5	—	$\mu\text{s}$


**NOTE:**

1. Derate power dissipation linearly 1.67 mW/ $^\circ\text{C}$  above 25 $^\circ\text{C}$ .
2. Derate power dissipation linearly 2.50 mW/ $^\circ\text{C}$  above 25 $^\circ\text{C}$ .
3. RMA flux is recommended.
4. Methanol or isopropyl alcohols are recommended as cleaning agents.
5. Soldering iron tip 1/16" (1.6mm) minimum from housing.


**Figure 1. Output Current vs. Input Current**

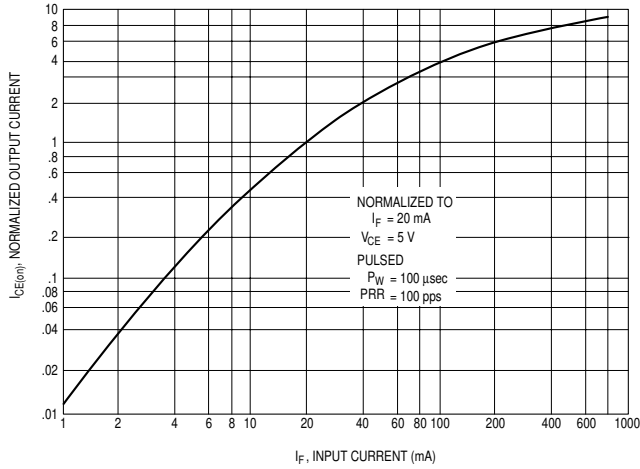


**Figure 2. Output Current vs. Temperature**

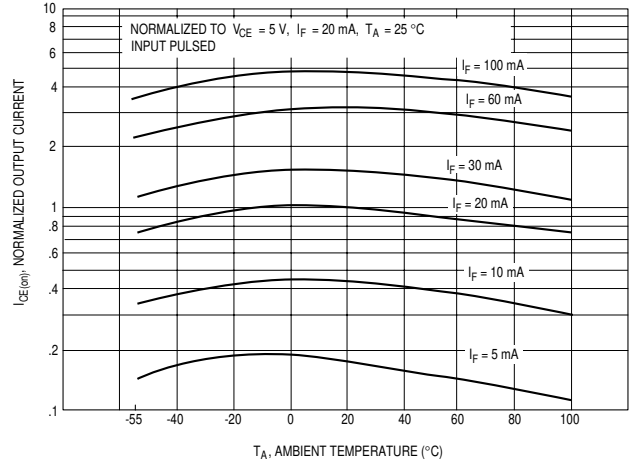


**Figure 3. V<sub>CE(SAT)</sub> vs. Temperature**

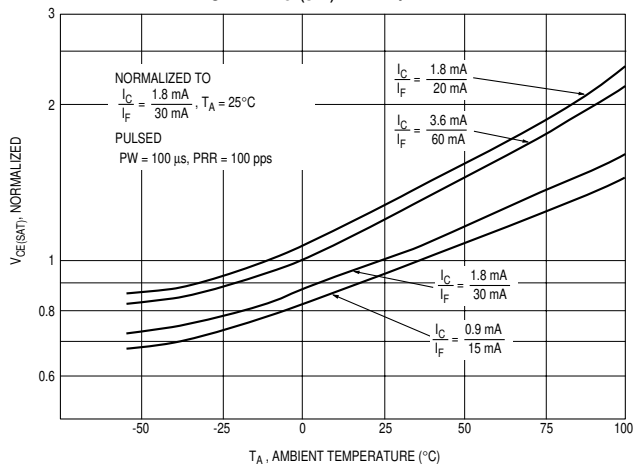


**Figure 4. Leakage Current vs. Temperature**

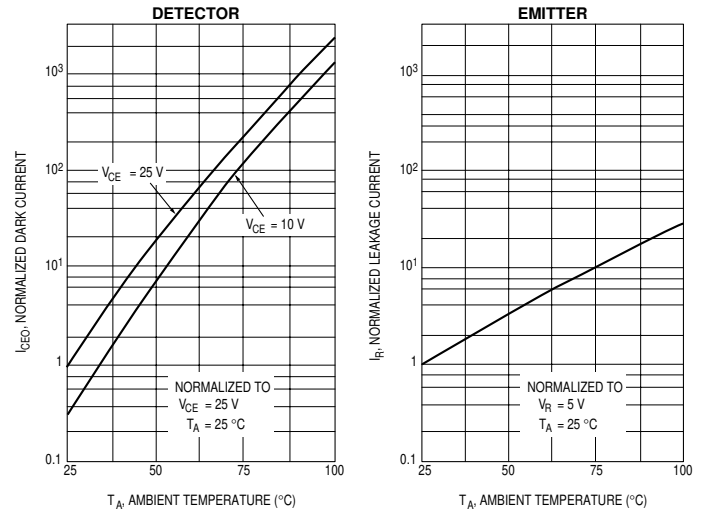

**Figure 5. Switching Speed vs. R<sub>L</sub>**

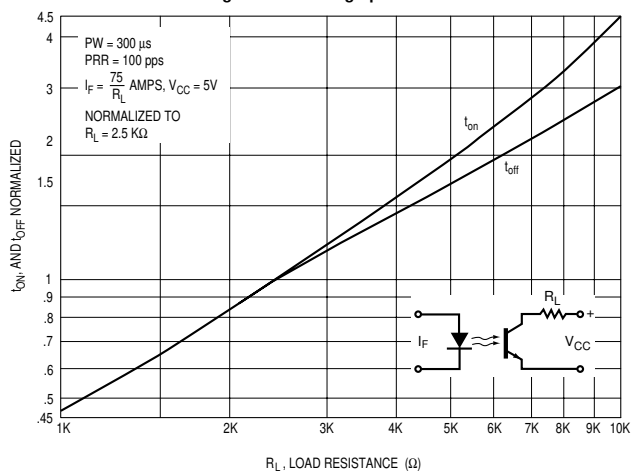

**Figure 6. Output Current vs. Distance**

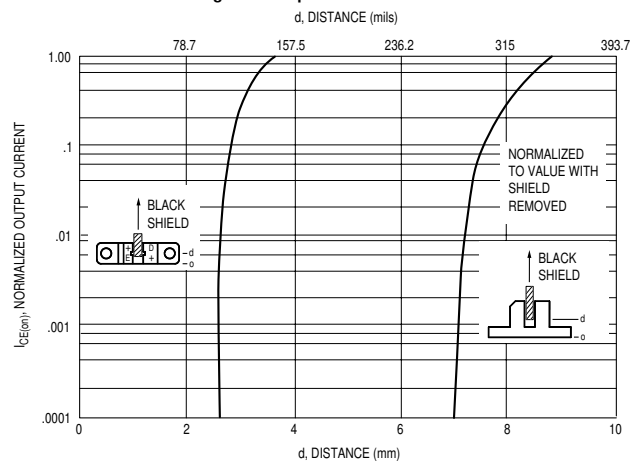



### DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

### LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in labeling, can be reasonably expected to result in a significant injury of the user.
2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.