



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



CM-BF527


Blackfin® Core Module

The CM-BF527 is optimized for performance and functionality. The module integrates processor, RAM, flash, external peripheral controllers and power supply at a size of 31.5x36.5mm! It is based on the high performance ADSP-BF527 from Analog Devices. The Core Module is designed for commercial usage (commercial temperature range). It addresses up to 64MByte SDRAM via its 16bit wide SDRAM bus and has an onboard NOR-flash of 8MByte. The processor features a built in USB-OTG 2.0 unit and has the physical Ethernet transceiver onboard.

Features

CPU	Analog Devices BF527 @ 600MHz	
RAM*	32/64MByte SDRAM up to 133MHz	
FLASH	8MByte	
INTERFACES	ETHERNET	1x10/100 Mbit Ethernet
	PPI	1
	SPI	1
	SPORT	2
	TWI/I²C	1
	UART	2
	USB 2.0	1 (OTG)
ADDITIONAL FEATURES	Single 3.3V supply voltage On-board core voltage regulator Low voltage reset circuit NAND Flash Interface	
TEMP. RANGE	0°C to +70°C	
VERSIONS	Connector	
DIMENSIONS	31x36mm	

* depends on version - see ordering information

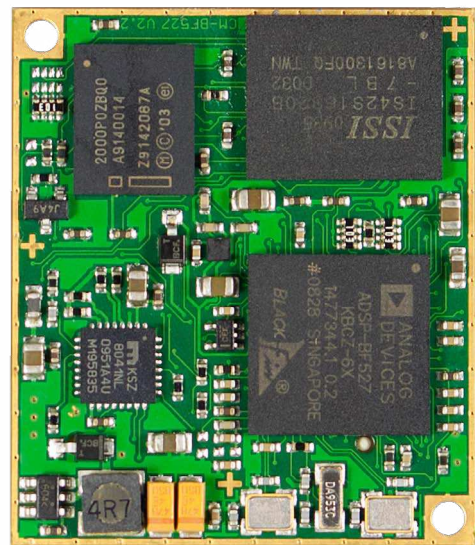

Development Support

- » EVAL-BF5xx Evaluation Board
- » DEV-BF5xx Development Board
- » DEV-BF5xxDA-Lite Development Board
- » BLACKSheep® OS
- » uClinux Port available

Ordering Information

Order No.	Info
100-1253-2	CM-BF527-C-C-Q50S32F8 (CM-BF527)
100-1254-2	CM-BF527-C-C-Q50S64F8 (CM-BF527-64SD)

Applications

- » Mobile Embedded Device
- » Network connected embedded system
- » Industrial control
- » Voice over IP (VoIP)
- » Multi-media application processor
- » Multi-media accessories - e.g. docks
- » Networked audio
- » Instrumentation
- » Imaging

BLUETECHNIX MECHATRONISCHE SYSTEME GMBH

Lainzerstraße 162/3
1130 Wien, Austria
www.bluetechnix.com

Tel.: +43 (1) 9142091 x 0
Fax.: +43 (1) 9142091 x 99
Email: office@bluetechnix.at

