



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



CPM2A Micro Controller**CPU and
Expansion Modules**

The CPM2A series micro controllers are among some of the most powerful small-scale control solutions in the micro PLC industry today. With 20, 30, 40, or 60 I/O point CPUs to choose from, advanced motion control features, multiple communications ports, and a powerful instruction set, the CPM2A series controller provides an advanced control solution in a micro sized package.



- 20, 30, 40 and 60 point I/O CPUs
- Expandable up to 120 I/O points
- Peripheral communications port standard
- RS-232C port Standard for direct connection to serial devices
- Removable Terminals
- Analog expansion modules available
- Temperature sensor expansion modules available
- Synchronized pulse control allows synchronization of input devices to control devices.
- Auxiliary 24VDC supply (AC type only)
- Relay or Transistor outputs
- Real Time Clock
- 20 kHz High speed counter input
- Two -10 kHz pulse outputs
- UL/CSA/CE

Communication and Expansion

Serial Communication


- Built in serial port allows direct connection to CPU
- Connect directly to serial devices such as a printer, modem, or a bar code reader
- Download programs from a PC directly to CPM2A serial port
- 1:1 connection to other Omron PLCs allow CPUs to seamlessly share data
- CPM1A-CIF01 adapter allows use of dual RS-232C ports

Peripheral Communication

- Connect directly to Omron programming devices
- Connect directly to Omron operator interface terminal
- Connect to additional RS-232C adapter or RS-422 adapter

Expansion

- Easy “single cable” expansion
- Connect up to 3 expansion modules for up to 120 I/O points
- Modular expansion allows addition of input, output or combination I/O modules.
- 8, 16, or 20 point modules available
- Relay or transistor expansion modules
- Analog I/O module
- RTD and thermocouple temperature sensor modules
- Compobus adapter allows connection to a Compobus/S network as a slave

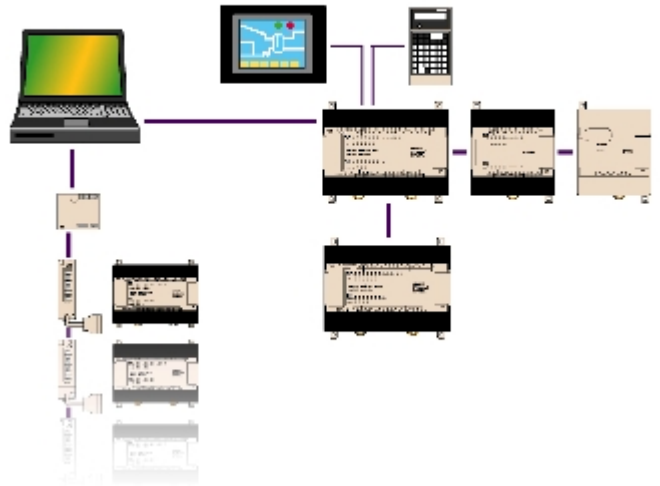

CPM2A System Configuration Diagram

SPECIFICATIONS

Item		CPM2A-20	CPM2A-30	CPM2A-40	CPM2A-60
Number of Inputs		12	18	24	36
Number of Outputs		8	12	16	24
Supply voltage	AC Type DC Type	100 to 240 VAC 50/60 Hz 24 VDC			
Operating Voltage Range	AC Type DC Type	85 to 264 VAC 20.4 to 26.4 VDC			
Power Consumption	AC Type DC Type	60VA max 20W max			
Inrush current	AC Type DC Type	60A max 20A max			
External Power Supply (AC Type Only)	Voltage	24VDC			
	Current	300 mA			
Control method		Stored program method			
I.O control method		Cyclic scan with direct output; Immediate refresh processing			
Programming language		Ladder diagram			
Instruction length		1 step per instruction, 1 to 5 words per instruction			
Types of instructions		Basic instructions: 14 Special instructions: 105 instructions, 185 variations			
Execution time		Basic instructions: .64 µsec Special instructions: 7.8 µsec			
Program capacity		4,096 words			
Timers/Counters		256 timers/counters (TIM/CNT 000 to TIM/CNT 255) Types: 1ms, 10ms, 100ms, 1s, 10s, decrementing and reversible counters			
Interrupt processing		4 External interrupts (Shared by external interrupt inputs (counter mode) and the quick response inputs)			
High-speed counters (5 total)		Pulse plus direction mode (20kHz) Differential phase mode (5Khz) Up/down pulse mode (20kHz) Increment mode (20kHz) Interrupt inputs: increment or decrement mode (2kHz)			
Pulse output (2 total)		2-Single phase pulse outputs 10 Hz to 10 kHz (transistor output models only)			
Clock Function		Shows year, month, day of the week, day, hour, minute, and second			
Memory Backup		Flash Memory Program, read-only DM area, and PC setup Battery Backup: Read/write DM, HR, AR, and counter values			
Certification		UL/CSA/CE			

Dimensions

		CPM2A-20	CPM2A-30	CPM2A-40	CPM2A-60
Width		130 mm (5.12 in)	130 mm (5.12 in)	150 mm (5.91 in)	195mm (7.68 in)
Depth	AC	90 mm (3.54 in)	90 mm (3.54 in)	90 mm (3.54 in)	90 mm (3.54 in)
	DC	55 mm (2.17 in)	55 mm (2.17 in)	55 mm (2.17 in)	55 mm (2.17 in)
Height		90 mm (3.54 in)	90 mm (3.54 in)	90 mm (3.54 in)	90 mm (3.54 in)

CPM2A Ordering Guide

Description	# Of I/O		Input Type	Output Type	Power Supply	Part Number
	Input	Output				
20 I/O Points	12	8	DC	Relay	AC	CPM2A-20CDR-A
				Relay	DC	CPM2A-20CDR-D
				Transistor (NPN)		CPM2A-20CDT-D
				Transistor (PNP)		CPM2A-20CDT1-D
30 I/O Points	18	12	DC	Relay	AC	CPM2A-30CDR-A
				Relay	DC	CPM2A-30CDR-D
				Transistor (NPN)		CPM2A-30CDT-D
				Transistor (PNP)		CPM2A-30CDT1-D
40 I/O Points	24	16	DC	Relay	AC	CPM2A-40CDR-A
				Relay	DC	CPM2A-40CDR-D
				Transistor (NPN)		CPM2A-40CDT-D
				Transistor (PNP)		CPM2A-40CDT1-D
60 I/O Points	36	24	DC	Relay	AC	CPM2A-60CDR-A
				Relay	DC	CPM2A-60CDR-D
				Transistor (NPN)		CPM2A-60CDT-D
				Transistor (PNP)		CPM2A-60CDT1-D

CPM2A Expansion Modules

Description	# Of I/O		Input Type	Output Type	Power Supply	Part Number
	Input	Output				
8 Input Point	8	0	DC	N/A	N/A	CPM1A-8ED
8 Output Point	0	8	N/A	Relay		CPM1A-8ER
				Transistor (NPN)		CPM1A-8ET
				Transistor (PNP)		CPM1A-8ET1
20 I/O Point	12	8	DC	Relay		CPM1A-20EDR
				Transistor (NPN)		CPM1A-20EDT
				Transistor (PNP)		CPM1A-20EDT1

Analog I/O and Temperature Sensor Modules

Description	# Of I/O		Input Type	Output Type	Power Supply	Part Number
Analog I/O	2	1	0 to 10V 1 to 5V 4 to 20mA	0-10V -10 to +10V 4 to 20mA		CPM1A-MAD01
Temperature Sensor Module	2	1	RTD Pt 100 -40 to 250C	0-10V -10 to +10V 4 to 20mA		CPM1A-TS101-DA
				N/A		CPM1A-TS101
						CPM1A-TS102
	2	-	Thermocouple J,K -40 to 250C			CPM1A-TS201
	4	-				CPM2A-TS202

Compobus/S Adapter

Item	Description	Part Number
Compobus/S Adapter	Operates as a Compobus /S slave and provides 8 inputs and 8 outputs to the CPM1A or CPM2A PC	CPM1A-SRT21

Adapters

Item	Description	Part Number
RS232C Adapter	Converts peripheral port to RS232C level / Cable 3.3m	CQM-CIF02
RS232C Adapter	Converts peripheral port to RS232C level / DIN mount	CPM1-CIF01
RS422 Adapter	Converts RS232C port to RS422A (Requires 5VDC power supply)	NT-AL001
Link Adapter	Converts RS422 to RS232C	3G2A9-AL004-E
RS422 Adapter	Converts peripheral port to RS422A / DIN mount	CPM1-CIF11

Connecting Cables

Item	Description	Part Number
RS232C Cable	RS232C to RS232C / PLC communication (2m)	C200H-CN320-EU
RS232C Cable	RS232C to RS232C / PC connection for program download (2m)	C200HS-CN220-EU

Peripheral devices

Item	Description	Part Number
Programming console	Handheld programming console with 2m cable attached	CQM1-PRO01-E
Programming console	Handheld programming console with back light (Cable not included)	C200H-PRO27-E
Connecting cable	Connects C200H programming console to peripheral port (2m)	C200H-CN222
Connecting cable	Connects C200H programming console to peripheral port (4m)	C200H-CN422
Backup Battery	Back up battery for CPM2A	CPM2A-BAT01

Software

Item	Description	Part Number
SYSWIN	SYSWIN V3.3 CD ROM	SYSWIN-CPM1-V3.3

*CX-programmer, V1.2 available spring 2000, will support Series 2 Micros (CPM2A/CPM2C)

Literature

Item	Description	Part Number
Operation Manual	CPM2A Operation Manual	W352-E1-1
Programming Manual	CPM2A Programming Manual	W353-E1-1