



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




# TEMP-FLEX

a **molex** company

## INSULATION DISPLACEMENT CABLE

.050" PITCH, 26 AWG, 7/34 STRANDED EXTRUDED FEP

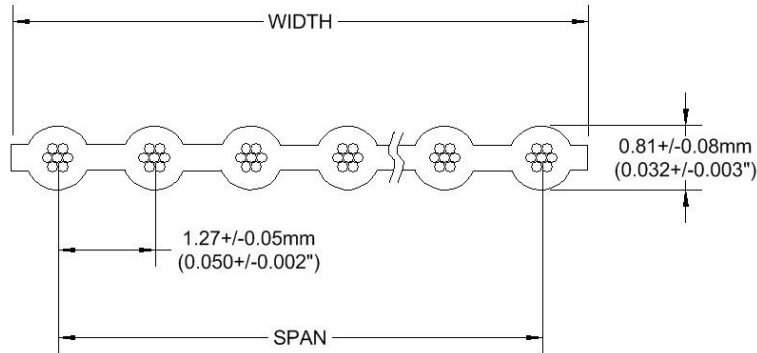

Cond. No.	Part Number	Span	Width
10	1000570094	0.450 ± .007	0.500 ± .007
12	1000570096	0.550 ± .007	0.600 ± .007
14	1000570097	0.650 ± .007	0.700 ± .007
15	1000570439	0.700 ± .007	0.750 ± .007
16	1000570098	0.750 ± .007	0.800 ± .007
20	1000570101	0.950 ± .010	1.000 ± .010
26	1000570107	1.250 ± .010	1.300 ± .010
30	1000570110	1.450 ± .010	1.500 ± .010
34	1000570111	1.650 ± .010	1.700 ± .010
37	1000570441	1.800 ± .010	1.850 ± .010
40	1000570112	1.950 ± .010	2.000 ± .010
50	1000570115	2.450 ± .010	2.500 ± .010
60	1000570118	2.950 ± .015	3.000 ± .015
64	1000570121	3.150 ± .015	3.200 ± .015

CHARACTERISTICS	
Conductor	26 AWG, 7/34 Stranded, Silver Plated Copper
Insulation	FEP
Color	Green
Impedance (ohms)	100 Unbalanced   155 Balanced
Capacitance (pF/ft)	10.0 Unbalanced   5.9 Balanced
Inductance (uH/ft)	0.14 Unbalanced   0.16 Balanced
Insulation Resistance (Mohm)	>500
Voltage Rating	300V
Temperature Rating	200C

### PACKAGING

100 ft./Spool, 10 Ft. minimum length

### MINIMUM ORDER QUANTITY:

500 FT.

UL Style 20424