imall

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832 Email & Skype: info@chipsmall.com Web: www.chipsmall.com Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



molex

Withstanding high-temperatures and chemical exposures, rugged yet flexible MIL-Spec approved Temp-Flex® FEP Flat Ribbon Cables are ideal for aircraft avionics and harsh industrial applications

Features and Benefits

Wide temperature range (-65 to +200°C), durable and flexible FEP (Fluorinated Ethylene Propylene) dielectric insulation material	Withstands soldering terminations as well as sub-arctic environments. Facilitates agile movement and abrasion resistance. More robust and durable than PVC and TPE
Extruded cable	Encapsulates each conductor with insulation and will not delaminate
Pitch tolerance (control) to +/- 0.05mm (0.002")	Ensures compatibility with a wide range of Insulation Displacement Termination/Connectors (IDTs/IDCs)
Ribbonized cable	Delivers IDT/IDC press-fit terminations for efficiency and cost savings
Variety of conductor sizes (32 to 16 AWG), materials (bare copper, silver-plated copper and high- strength alloy) and pitches	Enables customization based on application requirements (current, voltage, space restrictions, tensile strength, flexibility and flex life)
16 AWG), materials (bare copper, silver-plated copper and high-	application requirements (current, voltage, space restrictions, tensile
16 AWG), materials (bare copper, silver-plated copper and high- strength alloy) and pitches	application requirements (current, voltage, space restrictions, tensile strength, flexibility and flex life) Withstands acids, alcohols, aldehydes, bases, esters, hydrocarbons (aliphatic, aromatic, and halogenated), ketones and

Temp-Flex[®] FEP Flat-Ribbon Cable

Commercial FEP Flat-Ribbon Cable, MIL-Spec Approved FEP Flat-Ribbon Cable



Temp-Flex FEP MIL-Spec Approved Flat-Ribbon Cable




Temp-Flex FEP Commercial Flat-Ribbon Cable

Applications

Aerospace and Defense

- Flight Data Recorder Box
- Satellite
- Radar
- Missile Systems
- Industrial Electronics
 - Robotics

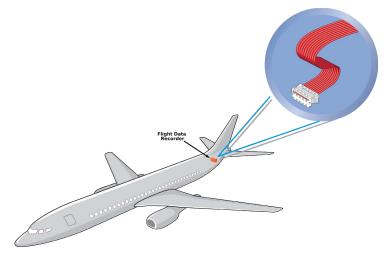

Flight Data Recorder Box

molex

Specifications

Reference Information

Packaging: 30.48m (100 ft.) spool ±10% 2 lengths maximum with 3.05m (10 ft.) minimum length UL File No.: E61522, Styles: 20424, 20726 Mates With: Picoflex®, C-Grid®, SL[™], KK®, Mini Mi II[™], EBBI[™] 50D connectors Designed In: Millimeters (Inches) RoHS: Yes Halogen Free: No

Construction

Conductor: 32 to 16 AWG (Solid or Stranded; Bare Copper, Silver-Plated Copper, High-Strength Alloy) Insulation Material: FEP Pitch: Dependent on specific part number Pitch Range: 0.32 to 2.54mm (0.0125 to 0.10") Pitch Tolerance: 0.05mm (0.002") Maximum Width: 82.55mm (3.25") **Electrical**

Voltage (max.): 300V AC (typical) Dielectric Withstanding Voltage: >2500V AC Insulation Resistance: >500 Megohms

Temp-Flex[®] FEP Flat-Ribbon Cable

Mechanical

Bend (±90°) Flex Life: Dependent on specific part number Rolling Flex Life: Dependent on specific part number Weight: Dependent on specific part number

Physical

Fire Resistance: UL94 V-O Flammability Test: VW1 Operating Temperature: -65 to +200°C

Ordering Information

Component	URL
Commercial FEP Flat-Ribbon Cable	www.molex.com/link/tempflexfepflatribbon.html
MIL-Spec Approved FEP Flat-Ribbon Cable	