



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



THIS IS ISSUED IN STRICT CONFIDENCE THAT IT IS NOT USED AS A BASIS FOR MANUFACTURE OR SALE AND THAT IT IS NOT COPIED, REPRINTED OR DISCLOSED TO A THIRD PARTY EITHER WHOLLY OR IN PART WITHOUT THE PRIOR WRITTEN CONSENT OF CAL TEST ELECTRONICS, INC.

REVISIONS			
REV.	DESCRIPTIONS	DATE	APPROVED
—	CLASS A RELEASED	7/11/99	

- DO-IT-YOURSELF (DIY) 4mm IN-LINE JACK, SCREW ATTACHMENT.
- SPECIFICATIONS:  
INSULATOR BODY: POLYAMIDE (NYLON)  
JACK BODY: BRASS, NICKEL PLATED
- RATING:  
VOLTAGE: 1,200V AC/DC  
CURRENT: 36A MAX.  
TEMPERATURE: -20° C TO +80° C.
- MAXIMUM WIRE SIZES:  
CONDUCTOR:  $\varnothing.090$  (12AWG)  
STRIP LENGTH: .25 (6.4)

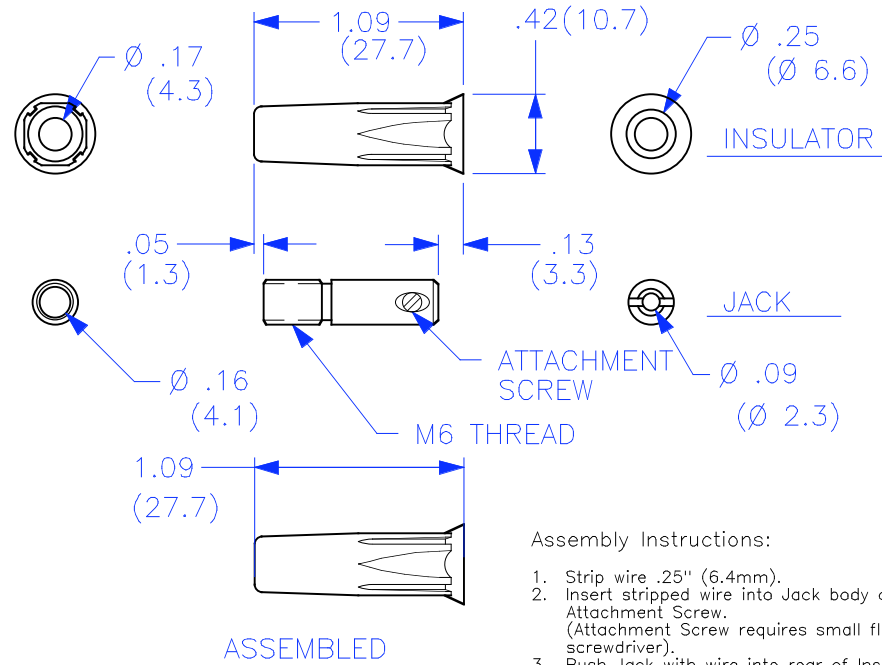

**PART NUMBER**

**CT2215-#**

- COLOR:
- 0 - BLACK
  - 2 - RED
  - 4 - YELLOW
  - 5 - GREEN
  - 6 - BLUE
  - 9 - WHITE

Assembly Instructions:

- Strip wire .25" (6.4mm).
- Insert stripped wire into Jack body and tighten Attachment Screw. (Attachment Screw requires small flat blade screwdriver).
- Push Jack with wire into rear of Insulator housing and thread.
- Using same small screwdriver, engage Jack slots through rear of Insulator and snug Jack into Insulator housing.

THIRD ANGLE PROJECTION		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS $\pm 1/32$ .XX $\pm .02$ .XXX $\pm .005$ DO NOT SCALE DRAWING	CONTRACT NO.		<b>Cal Test Electronics</b> 22820 Savi Ranch Parkway Yorba Linda, CA 92887-4610			
			APPROVALS	DATE	TITLE			
		MATERIAL	DRAWN <b>WDH</b>	7/11/99	<b>DIY 4mm JACK, SCREW</b>			
		FINISH	CHECKED					
NEXT ASSY			ENGR.		SIZE <b>A</b>	CAGE CODE <b>43F45</b>	DWG. NO. <b>P221500</b>	REV. <b>—</b>
APPLICATION			DESIGN ACTIVITY		SCALE <b>1:1</b>	SHEET <b>1 OF 1</b>		