



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




# 5X7 Dot Character VFD Module

# CU24025ECPB-W1J

- ❑ 2 X 24 Characters 5mm High + Cursor
- ❑ LCD Compatible Design
- ❑ Operating Temp -40°C to +85°C
- ❑ Single 5V Supply with Power Save Mode
- ❑ High Brightness Blue Green Display
- ❑ Selectable 4/8 bit M68/i80 Interface
- ❑ ASCII + Extended Character Font
- ❑ 8 User Definable Character RAM
- ❑ 4 Level Brightness Control Function

The module includes the Vacuum Fluorescent Display glass, driver and micro-controller ICs with refresh RAM, character generator and interface logic. The high speed 8 bit parallel interface is 5V CMOS compatible suitable for connection to a host CPU bus which can be set to M68 or i80 series interface by a solder link on the module. Brightness control and power down functions are provided. A full data sheet is available.

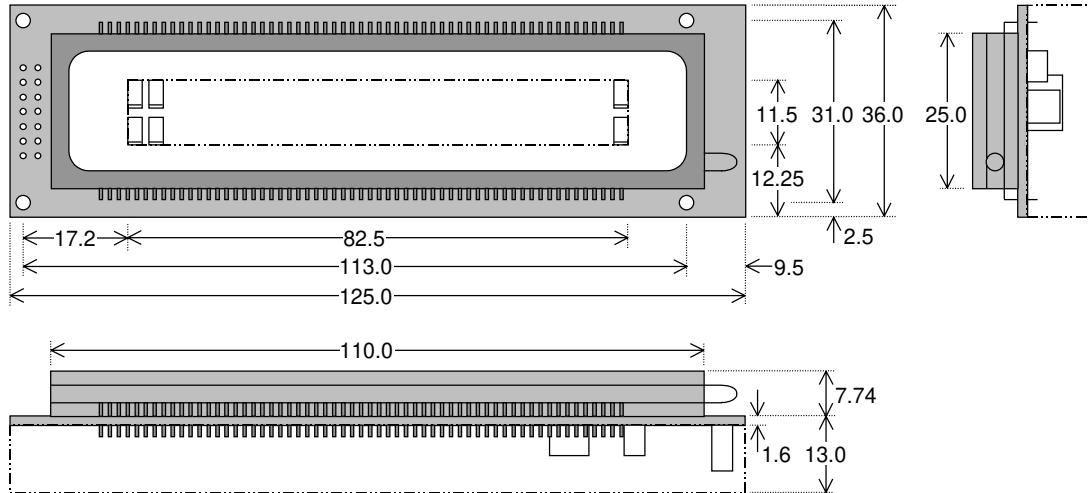

Dimensions in mm & subject to tolerances. Mounting holes 3.5mm dia.

## ELECTRICAL SPECIFICATION

Parameter	Symbol	Value	Condition
Power Supply Voltage	V <sub>CC</sub>	5.0VDC +/- 5%	GND=0V
Power Supply Current	I <sub>CC</sub>	155mADC typ.	V <sub>CC</sub> =5V
Logic High Input	V <sub>IH</sub>	2.0VDC min.	V <sub>CC</sub> =5V
Logic Low Input	V <sub>IL</sub>	0.8VDC max.	V <sub>CC</sub> =5V
Logic High Output	V <sub>OH</sub>	V <sub>CC</sub> -0.4VDC min.	I <sub>OH</sub> = -1.6mA
Logic Low Output	V <sub>OL</sub>	0.4VDC max.	I <sub>OL</sub> = 1.6mA

The power on rise time should be less than 50ms. The inrush current at power on can be 2 x I<sub>CC</sub>. The I<sub>CC</sub> current is 10mA maximum while in power down mode.

## OPTICAL and ENVIRONMENTAL SPECIFICATIONS

Parameter	Value
Character Size/Pitch (XxY mm)	2.4 x 4.7/3.6 x 6.1
Dot Size/Pitch (XxY mm)	0.4 x 0.5/0.5 x 0.7
Luminance	350 cd/m <sup>2</sup> (100 fL) Typ.
Colour of Illumination	Blue-Green (Filter for more colours)
Operating Temperature	-40°C to +85°C
Storage Temperature	-40°C to +85°C
Operating Humidity (non condensing)	20 to 80% RH @ 25°C

## SOFTWARE COMMANDS

Instruction	R/W	RS	D0-D7
Clear Display	L	L	01H
Cursor Return Home	L	L	02H-03H
Entry Mode Set	L	L	04H-07H
Display ON/OFF	L	L	08H-0FH
Cursor/Display Shift	L	L	10H-1FH
Function Set	L	L	20H-3FH
Brightness Set	L	H	00H-03H
Set CG RAM Addr.	L	L	40H-7FH
Set DD RAM Addr.	L	L	80H-E7H
Read BUSY/Addr.	H	L	00H-FFH
Write Data to RAM	L	H	00H-FFH
Read Data from RAM	H	H	00H-FFH

## PIN CONNECTIONS

Pin	Sig	Pin	Sig
1	GND	2	V <sub>CC</sub>
3	(Fnc)	4	RS
5	R/W #	6	E #
7	DB0	8	DB1
9	DB2	10	DB3
11	DB4	12	DB5
13	DB6	14	DB7

## TIMING PARAMETERS (min)

(E)nable Cycle Time	1000ns
(E)nable Pulse Width	450ns
Hold after (E)nable	10ns

## CHARACTER FONT

Hex	00	10	20	30	40	50	60	70	80	90	A0	B0	C0	D0	E0	F0
00			0	1	2	3	4	5	6	7	8	9	-	.	:	;
01			!	"	#	\$	%	&	'	(	)	*	+	,	<	>
02			"	2	B	R	b	r	Δ	E	r	ι	υ	×	β	θ
03			#	3	C	S	c	s	Δ	R	ι	υ	×	β	θ	°
04			\$	4	D	T	d	t	Δ	#	\	/	!	¢	£	¤
05			%	5	E	U	e	u	E	O	.	!	¢	£	¤	°
06			&	6	F	V	f	v	Δ	+	7	8	9	0	1	2
07			'	7	G	W	g	w	Δ	+	7	8	9	0	1	2
08			(	8	H	X	h	x	Δ	!	¢	£	¤	°	1	2
09			)	9	I	Y	i	y	Δ	¢	£	¤	°	1	2	3
0A			*	:	J	Z	j	z	Δ	£	¤	°	1	2	3	4
0B			+	;	K	Z	k	z	Δ	¤	°	1	2	3	4	5
0C			,	<	L	#	!	!>	Δ	°	1	2	3	4	5	6
0D			-	=	M	J	m	j	Δ	°	1	2	3	4	5	6
0E			.	>	N	^	n	^	Δ	°	1	2	3	4	5	6
0F			~	/	?	0	_	0	Δ	°	1	2	3	4	5	6

## JUMPER LINKS

# Interface M68/i80  
When jumper link MPU is soldered, these inputs change to i80 series CPU control lines.  
Pin 5 = /WR Pin 6 = /RD

## Pin 3 (Fnc) Input

This is normally open circuit. If pads on R19 are linked, Pin 3 = /Reset.

## CONTACT

Noritake Sales Office Tel Nos  
Nagoya Japan: +81 (0)52-561-9867  
Canada: +1-416-291-2946  
Chicago USA: +1-847-439-9020  
Munich (D): +49 (0)89-3214-290  
Itron UK: +44 (0)1493 601144  
Rest Europe: +49 (0)61-0520-9220  
[www.noritake-elec.com](http://www.noritake-elec.com)

Subject to change without notice.  
IUK Doc Ref: 03014 Iss:1 19SEP00