

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



### Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China









## 14.22mm (0.56INCH) DUAL DIGIT NUMERIC DISPLAY

Green

Part Number: DC56-11CGKWA


#### **Features**

- 0.56 inch digit height.
- Low current operation.
- Excellent character appearance.
- Easy mounting on P.C. boards or sockets.
- Two digit package simplifies alignments & assembly.
- Mechanically rugged.
- Standard : gray face, white segment.
- RoHS compliant.

#### **Description**

The Green source color devices are made with AlGaInP on GaAs substrate Light Emitting Diode.

#### **Package Dimensions& Internal Circuit Diagram**

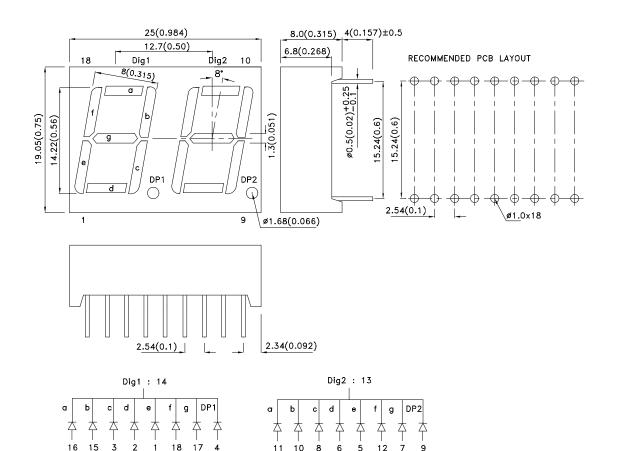



1. All dimensions are in millimeters (inches), Tolerance is ±0.25(0.01")unless otherwise noted.

2. The specifications, characteristics and technical data described in the datasheet are subject to change without prior notice.

SPEC NO: DSAM8359 REV NO: V.2A DATE: MAR/19/2015 PAGE: 1 OF 6
APPROVED: WYNEC CHECKED: Joe Lee DRAWN: P.Cheng ERP: 1302000721

# **Kingbright**

#### **Selection Guide**

Part No.	Dice	Lens Type	lv (ucd) [1] @ 10mA		Description
			Min.	Тур.	
DC56-11CGKWA	Green (AlGaInP)	White Diffused	14000	35000	Common Cathode, Rt.Hand Decimal.
DC30-11CGRWA	Green (Alganir)	Willie Dillused	*5600	*12000	

### Electrical / Optical Characteristics at TA=25°C

Symbol	Parameter	Device	Тур.	Max.	Units	Test Conditions
λpeak	Peak Wavelength	Green	574		nm	IF=20mA
λD [1]	Dominant Wavelength	Green	570		nm	IF=20mA
Δλ1/2	Spectral Line Half-width	Green	20		nm	IF=20mA
С	Capacitance	Green	15		pF	VF=0V;f=1MHz
VF [2]	Forward Voltage	Green	2.1	2.5	V	IF=20mA
lr	Reverse Current	Green		10	uA	VR=5V

### Notes:

- 1. Wavelength: +/-1nm.
  2. Forward Voltage: +/-0.1V.
- 3. Wavelength value is traceable to the CIE127-2007 compliant national standards.
- 4. Excess driving current and/or operating temperature higher than recommended conditions may result in severe light degradation or premature failure.

#### Absolute Maximum Ratings at TA=25°C


Parameter	Green	Units	
Power dissipation	75	mW	
DC Forward Current	30	mA	
Peak Forward Current [1]	150	mA	
Reverse Voltage	5	V	
Operating / Storage Temperature	-40°C To +85°C		
Lead Solder Temperature[2]	ead Solder Temperature[2] 260°C For 3-5 Seconds		

- 1. 1/10 Duty Cycle, 0.1ms Pulse Width.
   2. 2mm below package base.

SPEC NO: DSAM8359 **REV NO: V.2A DATE: MAR/19/2015** PAGE: 2 OF 6 **APPROVED: WYNEC CHECKED:** Joe Lee ERP: 1302000721 **DRAWN: P.Cheng** 


Notes:
1. Luminous intensity/ luminous Flux: +/-15%.
\*Luminous intensity value is traceable to the CIE127-2007 compliant national standards.


## **Kingbright**

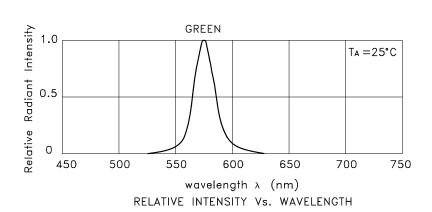



#### Green

#### DC56-11CGKWA










SPEC NO: DSAM8359 APPROVED: WYNEC REV NO: V.2A CHECKED: Joe Lee DATE: MAR/19/2015 DRAWN: P.Cheng PAGE: 3 OF 6 ERP: 1302000721



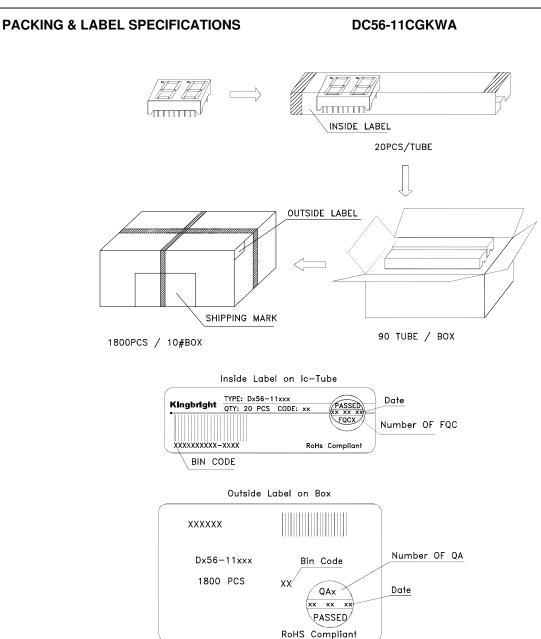

#### Terms and conditions for the usage of this document

- 1. The information included in this document reflects representative usage scenarios and is intended for technical reference only.
- 2. The part number, type, and specifications mentioned in this document are subject to future change and improvement without notice. Before production usage customer should refer to the latest datasheet for the updated specifications.
- 3. When using the products referenced in this document, please make sure the product is being operated within the environmental and electrical limits specified in the datasheet. If customer usage exceeds the specified limits, Kingbright will not be responsible for any subsequent issues.
- 4. The information in this document applies to typical usage in consumer electronics applications. If customer's application has special reliability requirements or have life-threatening liabilities, such as automotive or medical usage, please consult with Kingbright representative for further assistance.
- 5. The contents and information of this document may not be reproduced or re-transmitted without permission by Kingbright.
- 6. All design applications should refer to Kingbright application notes available at http://www.KingbrightUSA.com/ApplicationNotes

SPEC NO: DSAM8359 REV NO: V.2A DATE: MAR/19/2015 PAGE: 4 OF 6
APPROVED: WYNEC CHECKED: Joe Lee DRAWN: P.Cheng ERP: 1302000721




#### THROUGH HOLE DISPLAY MOUNTING METHOD

### Lead Forming

Do not bend the component leads by hand without proper tools.

The leads should be bent by clinching the upper part of the lead firmly such that the bending force is not exerted on the plastic body.

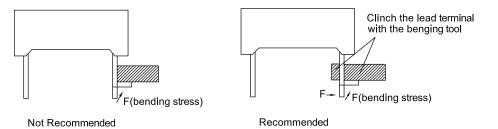


#### Installation

- 1. The installation process should not apply stress to the lead terminals.
- 2. When inserting for assembly, ensure the terminal pitch matches the substrate board's hole pitch to prevent spreading or pinching the lead terminals.



3.The component shall be placed at least 5mm from edge of PCB to avoid damage caused excessive heat during wave soldering.




 SPEC NO: DSAM8359
 REV NO: V.2A
 DATE: MAR/19/2015
 PAGE: 5 OF 6

 APPROVED: WYNEC
 CHECKED: Joe Lee
 DRAWN: P.Cheng
 ERP: 1302000721

# **Kingbright**

#### Recommended Wave Soldering Profiles:

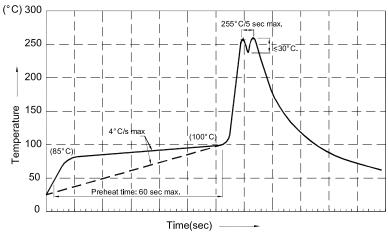

#### Notes:

- 1.Recommend pre-heat temperature of 105° C or less (as measured with a thermocouple attached to the LED pins) prior to immersion in the solder wave with a maximum solder bath temperature of 260° C
- 2.Peak wave soldering temperature between 245° C ~ 255° C for 3 sec (5 sec max).
- 3.Do not apply stress to the epoxy resin while the temperature is above 85°C.
- 4. Fixtures should not incur stress on the component when mounting and during soldering process.
- 5.SAC 305 solder alloy is recommended.
- 6.No more than one wave soldering pass.
- 7.During wave soldering, the PCB top-surface temperature should be kept below 105°C.

#### Soldering General Notes:

- 1. Through-hole displays are incompatible with reflow soldering.
- 2.If components will undergo multiple soldering processes, or other processes where the components may be subjected to intense heat, please check with Kingbright for compatibility.

#### **CLEANING**

- 1.Mild "no-clean" fluxes are recommended for use in soldering.
- $\hbox{2.If cleaning is required, Kingbright recommends to wash components with water only.}\\$

Do not use harsh organic solvents for cleaning because they may damage the plastic parts .

- 3.The cleaning process should take place at room temperature and the devices should not be washed for more than one minute.
- 4. When water is used in the cleaning process, immediately remove excess moisture from the component with forced-air drying afterwards.


#### **CIRCUIT DESIGN NOTES**

- 1.Protective current-limiting resistors may be necessary to operate the LEDs within the specified range.
- 2.LEDs mounted in parallel should each be placed in series with its own current-limiting resistor.

Recommended Set-up
VS

GND

GND



- 3. The driving circuit should be designed to protect the LED against reverse voltages and transient voltage spikes when the circuit is powered up or shut down.
- The safe operating current should be chosen after considering the maximum ambient temperature of the operating environment.
- 5. Prolonged reverse bias should be avoided, as it could cause metal migration, leading to an increase in leakage current or causing a short circuit.

SPEC NO: DSAM8359 REV NO: V.2A DATE: MAR/19/2015 PAGE: 6 OF 6
APPROVED: WYNEC CHECKED: Joe Lee DRAWN: P.Cheng ERP: 1302000721