Chipsmall

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!

Contact us

Conductor markers
SFX 10/23 MC NE GN V2
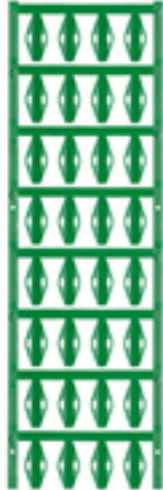
SlimFix X is a conductor and cable marker system with a space-saving design. The markers can be fitted even after the wiring has been installed. They are made from halogen-free material and conform to flammability rating V0. SlimFix is an acknowledged and approved marker type in transport engineering. Attaching even small markers is no problem with the **SF tool.**

• Halogen-free material
• Flammability rating V0
• Approved and listed markers for traffic engineering
• Attach to conductor cross-sections above 16.0 mm² with cable ties
• Markers in proven multicard format

General ordering data

Order No.	1007590000
Type	SFX 10/23 MC NE GN V2
Version	Conductor markers, MultiCard, 23 x 10 mm, Polyamide 66, Colour: Green
GTIN (EAN)	4032248709762
Qty.	160 pc(s).

Creation date April 11, 2013 3:40:17 PM CEST

Weidmüller ⋺Ξ

Conductor markers
SFX 10/23 MC NE GN V2

Technical data

Dimensions and weights

Length	23 mm	Width	10 mm
Height	0.8 mm	Net weight	0.613 g

Markings

Cadmium	< 75 ppm	Can be labelled with thermal transfer printers	No
Can be printed with plotter	Yes	Can be written with dot-matrix printer	No
Can be written with laser printer	No	Colour	Green
Conductor O.D.	7 - 317 mm	Conductor cross-section, max.	500 mm²
Conductor cross-section, min.	16 mm²	Halogen	No
Insulation cross-section, max.	40 mm	Material	Polyamide 66
Material colour according to resistance code	5	Operating temperature range, max.	100 °C
Operating temperature range, min.	-40 °C	Pin can be written (STI)	Yes
PrintJet	Yes	Silicone	No
Size of labelling field	23x5 mm	Speed marking laser	Yes
Type of printing	blank	UL 94 flammability rating	V-2

Classifications

ETIM 3.0	EC001530	UNSPSC	30-21-18-01
eClass 5.1	27-14-91-03	eClass 6.2	27-14-91-29
eClass 7.1	27-14-91-29		

Approvals

Approvals			
ROHS	Conform		

Creation date April 11, 2013 3:40:17 PM CEST