



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China






## Expansion Shield X200 for Raspberry Pi B+/2B/3B

SKU:DFR0357

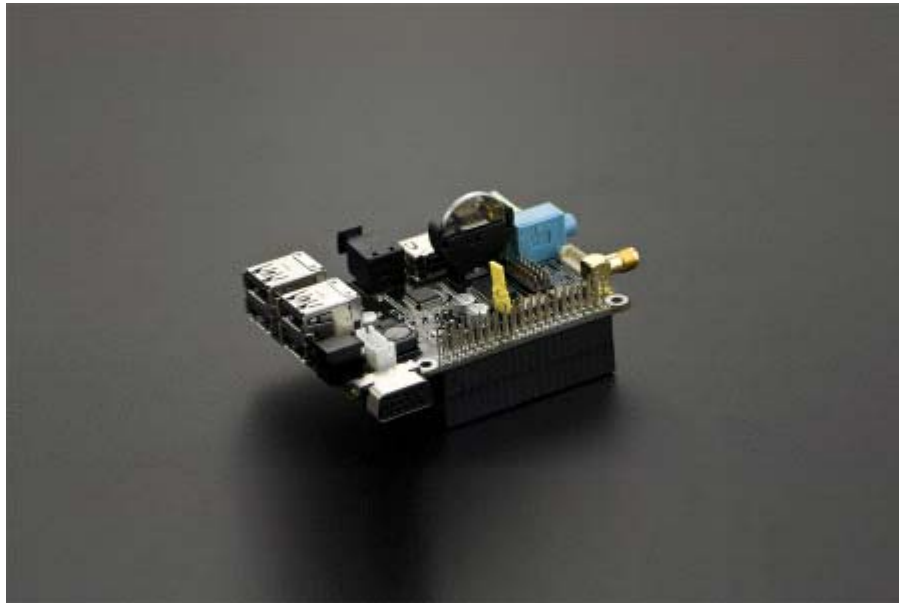

### INTRODUCTION

The Expansion Shield X200 is a most cost-effective shield which could apply to Raspberry Pi Model B+, Raspberry Pi 2 Model B and newest Raaspberry Pi 3 Model B. It integrates a lot of very useful functions such as RTC real time clock; audio input and output; VGA output; USB hub; WIFI; 8-way GPIO. With this shield, you can build Raspberry Pi projects more easily and save both time and cost.

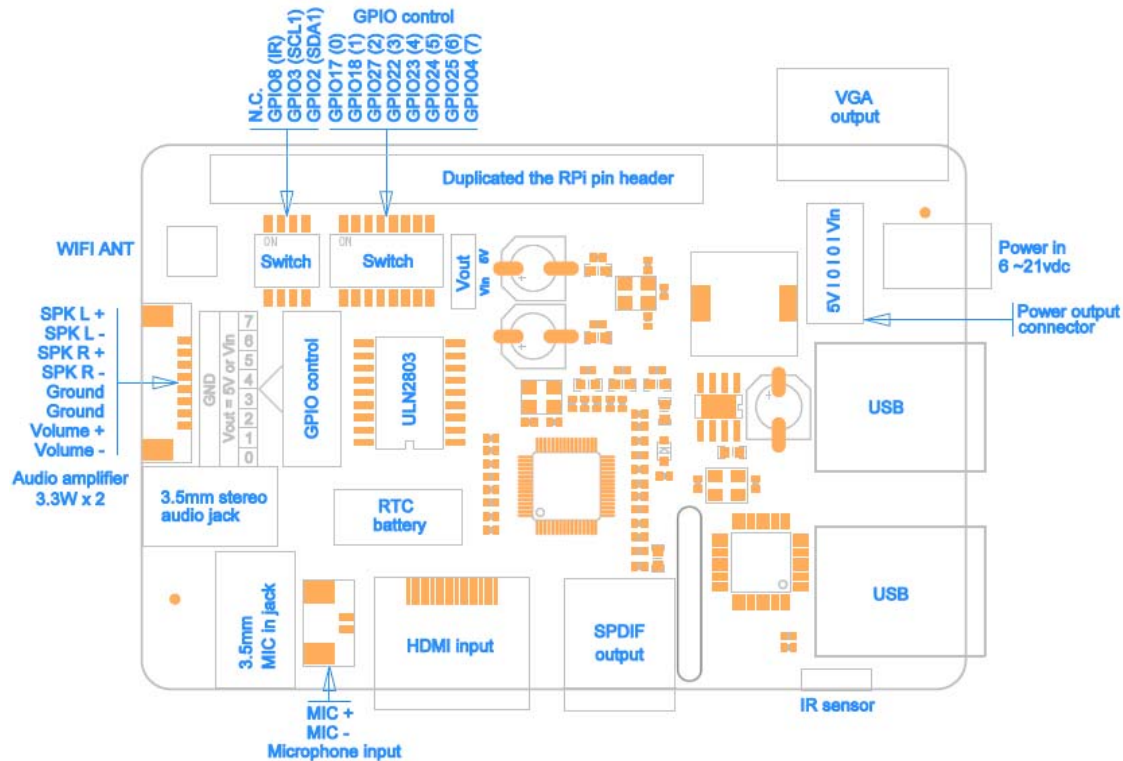

## SPECIFICATION

- Input Voltage: 6V to 21Vdc converted to 5V, 3A via step-down DC/DC converter to power the Raspberry Pi
- VGA output: HDMI to VGA converter supporting up to UXGA (1600x1200) and 1080p with 10-bit DAC
- Audio: 3.5mm MIC in jack
- 3.5mm stereo audio jack
- SPDIF output
- Audio IO connector (Microphone input and stereo audio amplifier 3.3Wx2)
- Wireless: WiFi (IEEE 802.11b/g/n) with external antenna
- IR sensor (38KHz)
- USB Storage: Self-powered USB hub with 3 ports
- Real-time clock (RTC): Based on DS3231SN with included CR2032 battery
- GPIO Control: 8-channel Darlington driver chip (ULN2803) allowing to control electronic circuits which require more current
- Misc: Power output socket
- Camera flex slot so camera can still be used with the expansion board attached
- DIP switch to remove connection from RPi's pin header
- Directly connected on top of the Raspberry Pi using the board GPIO header pins
- No wiring nor soldering is required
- Duplicated the 40-pin header of the R-Pi in order to support existing expansion boards
- Suitable for Raspberry Pi Model B+ and Raspberry Pi 2 Model B NEW!
- Dimensions: 85 x 56mm(3.35 x 2.20") (Same size as Raspberry Pi)

Note: When you power Raspberry Pi with the shield power resource, please don't power it again via the Micro-USB port, it will damage the board!

## **SHIPPING LIST**

- X200 Raspberry Pi expansion board x1
- HDMI adapter x1
- USB adapter x1
- 2.4GHz WIFI antenna x1
- nylon spacers (M3 x 20mm) x4
- nylon screws (M3 x 6mm) x8